

# NS-200FT/FC/FCS Series

## Industrial 10/100 Base-T(X) to 100 Base-FX Media Converter



### Introduction:

The NS-200F series is an Ethernet (10/100Base-TX) to Fiber Optic (100Base-FX) converter. The Ethernet supports 10/100M auto-negotiation feature and auto MDI/MDI-X function.

The NS-200F series operates at either half or full duplex mode.

It contains "soft start" function with overload protection, high-low voltage protection.

The width of the NS-200F series is just 33 mm, so it can be used where space is important.

### Features:

- Automatic MDI/MDI-X crossover for plug-and-play
- Each port supports both 10/100 Mbps speed auto negotiation
- Store-and-forward architecture
- Full duplex IEEE 802.3x and half duplex backpressure flow control
- Supports +10 ~ +30 VDC voltage
- Supports operating temperatures from 0 °C ~ +70 °C
- DIN-Rail mount for industrial usage

### Specifications:

Technology	
Standards	IEEE802.3, 802.3u, 802.3x
Processing Type	Store & forward wire speed switching
MAC Addresses	1024
Memory Bandwidth	1.4 Gbps
Interface	
RJ-45 Port	10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection
Fiber Port	100 Base-FX
LED Indicators	10/100M, Link/Act, Full duplex/Half duplex(Fiber Port)
Ethernet Isolation	1500 Vrms 1 minute
Frame Ground for EMS Protection	Yes
Multi Mode	Multi mode fiber cables: 50/125, 62.5/125 or 100/140 $\mu$ m
	Distance: 2 km, (62.5/125 $\mu$ m recommended) for full duplex
	Wavelength: 1300 or 1310nm
	Min. TX Output: -20 dBm
	Max. TX Output: -14 dBm
Single Mode	RX Sensitivity: -34 to -31 dBm
	Single-mode fiber cables: 8.3/125, 8.7/125, 9/125 or 10/125 $\mu$ m
	Distance: 15 km, (9/125 $\mu$ m recommended) for full duplex
	Wavelength: 1300 or 1310nm
	Min. TX Output: -15 dBm
	Max. TX Output: -8 dBm
	RX Sensitivity: -36 to -31 dBm


Ethernet Transmission distance	Ethernet: 2-pair UTP/STP Cat.3,4,5, EIA/TIA-568 100-ohm
	Fast Ethernet: 2-pair UTP/STP Cat. 5, EIA/TIA-568 100-ohm
<b>Power</b>	
Input Voltage Range	+10 ~ +30 VDC (Non-isolation)
Power consumption	0.12A@24 VDC, +/- 5% arrowed with 100M Full duplex\
LED Indicator	Yes
Protection	Power reverse polarity protection
Frame Ground for EMS Protection	Yes
<b>Mechanical</b>	
Case	Plastic (Flammability UL 94V-0)
Dimensions (W x H x D)	33mm x 107mm x 85mm
Installation	DIN-Rail
<b>Environmental</b>	
Operating Temperature	0°C ~ +70°C
Storage Temperature	-20 ~ +85°C
Ambient Relative Humidity	10% ~ 90% HR, non-condensing

### LED functions:


Standard RJ45 female connectors are provided. A standard RJ45 plug cable is necessary to connect your device to the unit since switch that supports auto crossover. Figure1 shows the LED indicator functions. The module includes an internal.

**Figure1:**

**NS-200FC/NS-200FCS**

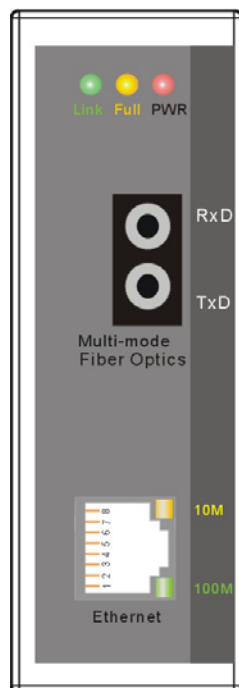


**NS-200FT**

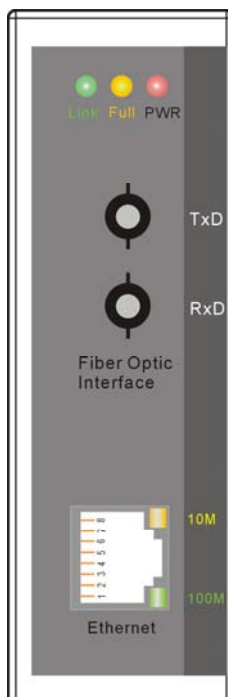

TxD(NS-200FT):Receive function, please connect to TxD cable.  
RxD(NS-200FT):Transmit function, please connect to RxD cable.




Function	LED Color	Description
Power	Red	Power is On
	Off	Power is Off
Fiber Optic	Yellow_On	Full Duplex Mode
	Yellow_Off	Half Duplex Mode
	Green_On	Link/Act
	Green_Off	Not Networking
Ethernet	Yellow	Link to 10 Mbps
	Green	Link to 100 Mbps
	Off	Not Networking



### Application Note:

Figure2 shows common media conversion system network topologies. This figure is a simple end-to-end configuration; it is easy way to verify proper operation of the media converter(s), assuming that the Network Interface Cards (NIC's) or Ethernet ports in each PC/workstation end link partner are properly configured.


**Figure2:**

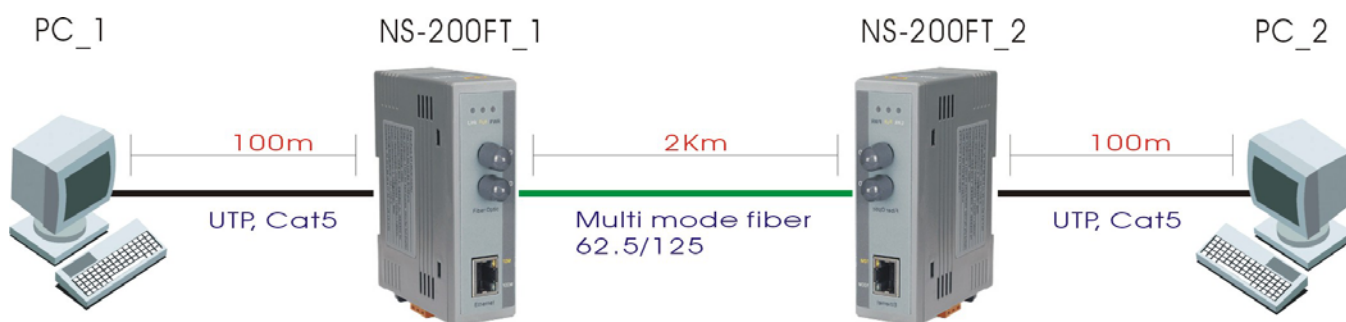

### **Checking Power:**

Since the NS-200F Series consumes 2.9W Max, ensure that your power supply is able to meet this demand. The Input voltage range is between +10 and +30VDC.

External power supply is connected using the removable terminal block as shown below:

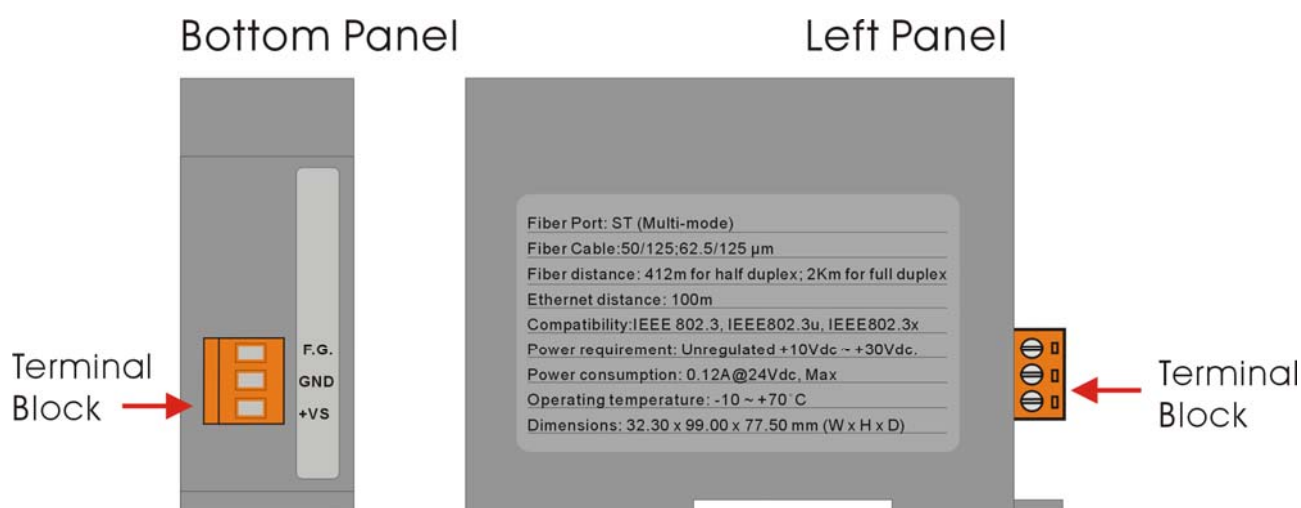

### **Pin Function for Terminal Block:**

External power supply is connected using the removable terminal block:

**+Vs** : Power input (+10 to +30V) and should be connected to the power supply (+)


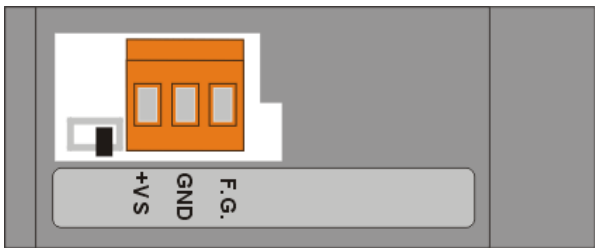
**GND** : Ground and should be connected to the power supply (-)

**F.G.** : F.G. stands for Frame Ground (protective ground). It is optional. If you use this pin, it can reduce EMI radiation; improve EMI performance and ESD protection.

### Full / Half-Duplex Selection:

There are two modes of data transmissions, full-duplex and half-duplex transmission. The data can be transmitted in both directions on a single carrier at the same time when you select Full-duplex mode. But the data can only be transmitted in one direction on a single carrier at the same time when you select Half-duplex mode. You may select Full or half-duplex mode according to your equipment requirement.

You can configure full or half-duplex NS-200F Series via DIP –Switch. (Default: full-duplex).

DIP-Switch	Description
	<b>Full-duplex ( Default )</b> Transmission Distance: 2 km
	<b>Half-duplex</b> Transmission Distance: 412m

### Dimensions:

