

**MODEL:  
IMB-H810-i2**

**microATX Motherboard with LGA1150 Intel® Core™ i7/i5/i3,  
Pentium® or Celeron® CPU, Intel® H81 Chipset, Dual GbE,  
DDR3, Internal DisplayPort, VGA, USB 3.0, COM Ports  
Four SATA 6Gb/s Ports, IPMI 2.0 and RoHS**

# User Manual

# Revision

---

Date	Version	Changes
13 March, 2014	1.01	Deleted I <sup>2</sup> C information
13 January, 2014	1.00	Initial release

# Copyright

---

## **COPYRIGHT NOTICE**

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

## **TRADEMARKS**

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

# Table of Contents

---

<b>1 INTRODUCTION.....</b>	<b>1</b>
1.1 INTRODUCTION.....	2
1.2 BENEFITS .....	3
1.3 FEATURES.....	3
1.4 CONNECTORS .....	4
1.5 DIMENSIONS.....	5
1.6 DATA FLOW .....	6
1.7 TECHNICAL SPECIFICATIONS .....	7
<b>2 PACKING LIST.....</b>	<b>9</b>
2.1 ANTI-STATIC PRECAUTIONS .....	10
2.2 UNPACKING PRECAUTIONS.....	10
2.3 PACKING LIST.....	11
2.4 OPTIONAL ITEMS .....	12
<b>3 CONNECTORS .....</b>	<b>15</b>
3.1 PERIPHERAL INTERFACE CONNECTORS.....	16
3.1.1 <i>IMB-H810-i2 Layout</i> .....	16
3.1.2 <i>Peripheral Interface Connectors</i> .....	17
3.1.3 <i>External Interface Panel Connectors</i> .....	18
3.2 INTERNAL PERIPHERAL CONNECTORS .....	18
3.2.1 <i>ATX Power Connector</i> .....	18
3.2.2 <i>Battery Connector</i> .....	20
3.2.3 <i>Chassis Intrusion Connector</i> .....	21
3.2.4 <i>CPU Power Connector</i> .....	21
3.2.5 <i>DisplayPort Connector</i> .....	22
3.2.6 <i>Fan Connector (CPU)</i> .....	23
3.2.7 <i>Fan Connectors (System)</i> .....	24
3.2.8 <i>Front Panel Connector</i> .....	25
3.2.9 <i>iRIS Module Slot</i> .....	26
3.2.10 <i>LAN LED Connectors</i> .....	27



## IMB-H810-i2 microATX Motherboard

3.2.11 Memory Card Slots.....	28
3.2.12 Parallel Port Connector .....	29
3.2.13 PCI Express Power Connector .....	31
3.2.14 Power Button .....	31
3.2.15 SATA 6Gb/s Drive Connectors.....	32
3.2.16 Serial Port Connectors (COM3~COM6), RS-232 .....	33
3.2.17 Serial Port Connectors (COM7~COM10), RS-232 .....	35
3.2.18 Serial Port Connector (COM10), RS-422/485.....	36
3.2.19 SMBus Connector .....	38
3.2.20 SPI Flash Connector.....	39
3.2.21 SPI Flash Connector, EC .....	39
3.2.22 TPM Connector.....	40
3.2.23 USB 2.0 Connectors.....	41
<b>3.3 EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL .....</b>	<b>42</b>
3.3.1 Audio Connector .....	43
3.3.2 Keyboard and Mouse Connectors.....	44
3.3.3 Ethernet and USB 2.0 Connectors .....	45
3.3.4 Ethernet and USB 3.0 Connectors .....	46
3.3.5 Serial Port Connectors (COM1, COM2).....	47
3.3.6 VGA Connectors .....	48
<b>4 INSTALLATION .....</b>	<b>50</b>
4.1 ANTI-STATIC PRECAUTIONS .....	51
4.2 INSTALLATION CONSIDERATIONS.....	51
4.2.1 Socket LGA1150 CPU Installation .....	53
4.2.2 Socket LGA1150 Cooling Kit Installation.....	56
4.2.3 DIMM Installation .....	58
4.2.4 iRIS-2400 Module Installation.....	59
4.3 SYSTEM CONFIGURATION.....	60
4.3.1 AT/ATX Power Mode Setting .....	60
4.3.2 Clear CMOS Button.....	61
4.3.3 COM 10 Function Select.....	61
4.3.4 Flash Descriptor Security Override.....	62
4.3.5 PCIe x16 Interface Setup .....	63
4.3.6 USB Power Select .....	63

4.4 INTERNAL PERIPHERAL DEVICE CONNECTIONS .....	64
4.4.1 SATA Drive Connection .....	64
4.5 EXTERNAL PERIPHERAL INTERFACE CONNECTION .....	65
4.5.1 Audio Connector .....	65
4.5.2 LAN Connection.....	66
4.5.3 PS/2 Keyboard and Mouse Connection .....	67
4.5.4 Serial Device Connection .....	68
4.5.5 USB Connection (Dual Connector).....	69
4.5.6 VGA Monitor Connection .....	70
4.6 IPMI SETUP PROCEDURE .....	71
4.6.1 Managed System Hardware Setup .....	71
4.6.2 Using the IEI iMAN Web GUI.....	72
<b>5 BIOS.....</b>	<b>74</b>
5.1 INTRODUCTION.....	75
5.1.1 Starting Setup.....	75
5.1.2 Using Setup .....	75
5.1.3 Getting Help.....	76
5.1.4 Unable to Reboot after Configuration Changes .....	76
5.1.5 BIOS Menu Bar.....	76
5.2 MAIN.....	77
5.3 ADVANCED.....	79
5.3.1 ACPI Settings .....	80
5.3.2 RTC Wake Settings .....	81
5.3.3 Trusted Computing .....	82
5.3.4 CPU Information.....	83
5.3.5 SATA Configuration .....	86
5.3.6 USB Configuration.....	87
5.3.7 F81866 Super IO Configuration .....	88
5.3.7.1 Serial Port n Configuration .....	89
5.3.7.2 Parallel Port Configuration .....	94
5.3.8 F81866 H/W Monitor.....	95
5.3.8.1 Smart Fan Mode Configuration .....	97
5.3.9 F81216 Secondary Super IO Configuration .....	98
5.3.9.1 Serial Port n Configuration .....	99

## IMB-H810-i2 microATX Motherboard

5.3.10 Serial Port Console Redirection .....	103
5.3.11 iEi Feature.....	106
5.4 CHIPSET .....	107
5.4.1 PCH-IO Configuration .....	108
5.4.1.1 PCI Express Configuration .....	110
5.4.1.2 PCH Azalia Configuration .....	111
5.4.2 System Agent (SA) Configuration .....	112
5.4.2.1 Graphics Configuration.....	113
5.4.2.2 NB PCIe Configuration.....	116
5.4.2.3 Memory Configuration .....	117
5.5 BOOT.....	118
5.6 SECURITY.....	120
5.7 EXIT .....	120
<b>6 SOFTWARE DRIVERS .....</b>	<b>122</b>
6.1 AVAILABLE SOFTWARE DRIVERS .....	123
6.2 SOFTWARE INSTALLATION .....	123
6.3 CHIPSET DRIVER INSTALLATION.....	125
6.4 GRAPHICS DRIVER INSTALLATION.....	128
6.5 LAN DRIVER INSTALLATION .....	131
6.6 USB 3.0 DRIVER INSTALLATION .....	135
6.7 AUDIO DRIVER INSTALLATION .....	139
6.7.1 BIOS Setup.....	139
6.7.2 Driver Installation .....	139
<b>A BIOS OPTIONS .....</b>	<b>142</b>
<b>B TERMINOLOGY.....</b>	<b>146</b>
<b>C ONE KEY RECOVERY.....</b>	<b>150</b>
C.1 ONE KEY RECOVERY INTRODUCTION .....	151
C.1.1 System Requirement .....	152
C.1.2 Supported Operating System.....	153
C.2 SETUP PROCEDURE FOR WINDOWS .....	154
C.2.1 Hardware and BIOS Setup .....	155
C.2.2 Create Partitions .....	155
C.2.3 Install Operating System, Drivers and Applications.....	159

C.2.4 Building the Recovery Partition.....	160
C.2.5 Create Factory Default Image .....	162
C.3 AUTO RECOVERY SETUP PROCEDURE .....	167
C.4 SETUP PROCEDURE FOR LINUX .....	172
C.5 RECOVERY TOOL FUNCTIONS .....	175
C.5.1 Factory Restore .....	177
C.5.2 Backup System.....	178
C.5.3 Restore Your Last Backup.....	179
C.5.4 Manual .....	180
C.6 RESTORE SYSTEMS FROM A LINUX SERVER THROUGH LAN .....	181
C.6.1 Configure DHCP Server Settings.....	182
C.6.2 Configure TFTP Settings.....	183
C.6.3 Configure One Key Recovery Server Settings.....	184
C.6.4 Start the DHCP, TFTP and HTTP .....	185
C.6.5 Create Shared Directory.....	185
C.6.6 Setup a Client System for Auto Recovery.....	187
C.7 OTHER INFORMATION .....	189
C.7.1 Using AHCI Mode or ALi M5283 / VIA VT6421A Controller .....	189
C.7.2 System Memory Requirement .....	192
<b>D WATCHDOG TIMER .....</b>	<b>193</b>
<b>E HAZARDOUS MATERIALS DISCLOSURE .....</b>	<b>196</b>
E.1 HAZARDOUS MATERIALS DISCLOSURE TABLE FOR IPB PRODUCTS CERTIFIED AS ROHS COMPLIANT UNDER 2002/95/EC WITHOUT MERCURY .....	197

# List of Figures

Figure 1-1: IMB-H810-i2.....	2
Figure 1-2: Connectors .....	4
Figure 1-3: IMB-H810-i2 Dimensions (mm) .....	5
Figure 1-4: Data Flow Diagram.....	6
Figure 3-1: Connectors and Jumpers.....	16
Figure 3-2: ATX Power Connector Location .....	19
Figure 3-3: Battery Connector Location.....	20
Figure 3-4: Chassis Intrusion Connector Location.....	21
Figure 3-5: CPU Power Connector Location.....	22
Figure 3-6: DisplayPort Connector Location .....	23
Figure 3-7: CPU Fan Connector Location .....	24
Figure 3-8: System Fan Connector Locations.....	25
Figure 3-9: Front Panel Connector Location .....	26
Figure 3-10: iRIS Module Slot Location.....	27
Figure 3-11: LAN LED Connector Locations .....	28
Figure 3-12: Memory Card Slot Locations .....	29
Figure 3-13: Parallel Port Connector Location .....	30
Figure 3-14: PCIe Power Location .....	31
Figure 3-15: Power Button Location.....	32
Figure 3-16: SATA 6Gb/s Drive Connector Locations .....	33
Figure 3-17: Serial Port Connector (COM3~COM6) Location.....	34
Figure 3-18: Serial Port Connector (COM7~COM10) Location.....	35
Figure 3-19: RS-422/485 Connector Location.....	37
Figure 3-20: SMBus Connector Location .....	38
Figure 3-21: SPI Flash Connector Location.....	39
Figure 3-22: SPI EC Flash Connector Location.....	40
Figure 3-23: TPM Connector Location.....	41
Figure 3-24: USB 2.0 Connector Locations .....	42
Figure 3-25: External Peripheral Interface Connector .....	43
Figure 3-26: Audio Connector .....	43



Figure 3-27: PS/2 Pinouts .....	44
Figure 3-28: Ethernet Connector.....	45
Figure 3-29: Serial Port Connector Pinouts.....	48
Figure 3-30: VGA Connector .....	49
Figure 4-1: Disengage the CPU Socket Load Lever.....	53
Figure 4-2: Remove Protective Cover.....	54
Figure 4-3: Insert the Socket LGA1150 CPU.....	55
Figure 4-4: Close the Socket LGA1150 .....	56
Figure 4-5: Cooling Kits (CF-1156A-RS and CF-1156E-RS) .....	56
Figure 4-6: Cooling Kit Support Bracket.....	57
Figure 4-7: DIMM Installation.....	58
Figure 4-8: iRIS-2400 Module Installation .....	59
Figure 4-9: AT/ATX Power Mode Switch Location .....	60
Figure 4-10: Clear CMOS Button Location.....	61
Figure 4-11: COM 10 Function Select Jumper Location.....	62
Figure 4-12: Flash Descriptor Security Override Jumper Location .....	63
Figure 4-13: SATA Drive Cable Connection.....	64
Figure 4-14: SATA Power Drive Connection.....	65
Figure 4-15: Audio Connector .....	66
Figure 4-16: LAN Connection .....	67
Figure 4-17: PS/2 Keyboard/Mouse Connector .....	68
Figure 4-18: Serial Device Connector.....	69
Figure 4-19: USB Connector.....	70
Figure 4-20: VGA Connector .....	71
Figure 4-21: IEI iMAN Web Address.....	72
Figure 4-22: IEI iMAN Web GUI.....	73
Figure 6-1: Introduction Screen .....	124
Figure 6-2: Available Drivers .....	124
Figure 6-3: Chipset Driver Welcome Screen.....	125
Figure 6-4: Chipset Driver License Agreement .....	126
Figure 6-5: Chipset Driver Read Me File .....	126
Figure 6-6: Chipset Driver Setup Operations .....	127
Figure 6-7: Chipset Driver Installation Finish Screen.....	128
Figure 6-8: Graphics Driver Welcome Screen .....	129
Figure 6-9: Graphics Driver License Agreement.....	129

## IMB-H810-i2 microATX Motherboard

Figure 6-10: Graphics Driver Read Me File .....	130
Figure 6-11: Graphics Driver Setup Operations .....	130
Figure 6-12: Graphics Driver Installation Finish Screen .....	131
Figure 6-13: Windows Control Panel .....	132
Figure 6-14: System Control Panel .....	132
Figure 6-15: Device Manager List .....	133
Figure 6-16: Update Driver Software Window .....	134
Figure 6-17: Locate Driver Files .....	134
Figure 6-18: LAN Driver Installation .....	135
Figure 6-19: USB 3.0 Driver Welcome Screen .....	136
Figure 6-20: USB 3.0 Driver License Agreement .....	137
Figure 6-21: USB 3.0 Driver Read Me File .....	137
Figure 6-22: USB 3.0 Driver Setup Operations .....	138
Figure 6-23: USB 3.0 Driver Installation Finish Screen .....	138
Figure 6-24: InstallShield Wizard Welcome Screen .....	140
Figure 6-25: Audio Driver Software Configuration .....	140
Figure 6-26: Restart the Computer .....	141
Figure C-1: IEI One Key Recovery Tool Menu .....	151
Figure C-2: Launching the Recovery Tool .....	156
Figure C-3: Recovery Tool Setup Menu .....	156
Figure C-4: Command Prompt .....	157
Figure C-5: Partition Creation Commands .....	158
Figure C-6: Launching the Recovery Tool .....	160
Figure C-7: Manual Recovery Environment for Windows .....	160
Figure C-8: Building the Recovery Partition .....	161
Figure C-9: Press Any Key to Continue .....	161
Figure C-10: Press F3 to Boot into Recovery Mode .....	162
Figure C-11: Recovery Tool Menu .....	162
Figure C-12: About Symantec Ghost Window .....	163
Figure C-13: Symantec Ghost Path .....	163
Figure C-14: Select a Local Source Drive .....	164
Figure C-15: Select a Source Partition from Basic Drive .....	164
Figure C-16: File Name to Copy Image to .....	165
Figure C-17: Compress Image .....	165
Figure C-18: Image Creation Confirmation .....	166

Figure C-19: Image Creation Complete .....	166
Figure C-20: Image Creation Complete .....	166
Figure C-21: Press Any Key to Continue .....	167
Figure C-22: Auto Recovery Utility .....	168
Figure C-23: Disable Automatically Restart.....	169
Figure C-24: Launching the Recovery Tool .....	169
Figure C-25: Auto Recovery Environment for Windows .....	170
Figure C-26: Building the Auto Recovery Partition.....	170
Figure C-27: Factory Default Image Confirmation .....	171
Figure C-28: Image Creation Complete .....	171
Figure C-29: Press any key to continue .....	171
Figure C-30: Partitions for Linux.....	173
Figure C-31: Manual Recovery Environment for Linux .....	174
Figure C-32: Access menu.lst in Linux (Text Mode).....	174
Figure C-33: Recovery Tool Menu .....	175
Figure C-34: Recovery Tool Main Menu .....	176
Figure C-35: Restore Factory Default.....	177
Figure C-36: Recovery Complete Window .....	177
Figure C-37: Backup System.....	178
Figure C-38: System Backup Complete Window .....	178
Figure C-39: Restore Backup .....	179
Figure C-40: Restore System Backup Complete Window .....	179
Figure C-41: Symantec Ghost Window .....	180
Figure C-42: Disable Automatically Restart.....	187

# List of Tables

Table 1-1: IMB-H810-i2 Specifications.....	8
Table 2-1: Packing List.....	12
Table 2-2: Optional Items.....	14
Table 3-1: Peripheral Interface Connectors.....	18
Table 3-2: Rear Panel Connectors.....	18
Table 3-3: ATX Power Connector Pinouts.....	19
Table 3-4: Battery Connector Pinouts.....	20
Table 3-5: Chassis Intrusion Connector Pinouts.....	21
Table 3-6: CPU Power Connector Pinouts.....	22
Table 3-7: DisplayPort Connector Pinouts.....	23
Table 3-8: CPU Fan Connector Pinouts.....	24
Table 3-9: System Fan Connector Pinouts.....	25
Table 3-10: Front Panel Connector Pinouts.....	26
Table 3-11: LAN1 LED Connector (LED_LAN1) Pinouts.....	28
Table 3-12: LAN2 LED Connector (LED_LAN2) Pinouts.....	28
Table 3-13: Parallel Port Connector Pinouts.....	30
Table 3-14: PCIe Power Pinouts.....	31
Table 3-15: SATA 6Gb/s Drive Connector Pinouts.....	33
Table 3-16: COM3~6 Serial Port Connector Pinouts.....	35
Table 3-17: COM7~10 Serial Port Connector Pinouts.....	36
Table 3-18: RS-422/485 Connector Pinouts.....	37
Table 3-19: DB-9 RS-422/485 Pinouts.....	37
Table 3-20: SMBus Connector Pinouts.....	38
Table 3-21: SPI Flash Connector Pinouts.....	39
Table 3-22: SPI EC Flash Connector Pinouts.....	40
Table 3-23: TPM Connector Pinouts.....	41
Table 3-24: USB 2.0 Connector Pinouts.....	42
Table 3-25: PS/2 Connector Pinouts.....	44
Table 3-26: USB 2.0 Port Pinouts.....	45
Table 3-27: LAN2 Pinouts.....	45

Table 3-28: Connector LEDs.....	46
Table 3-29: USB 3.0 Port Pinouts.....	46
Table 3-30: LAN1 Pinouts .....	47
Table 3-31: COM1 Serial Port Connector Pinouts .....	47
Table 3-32: COM2 Serial Port Connector Pinouts .....	47
Table 3-33: VGA Connector Pinouts.....	48
Table 4-1: COM 10 Function Select Jumper Settings .....	61
Table 4-2: Flash Descriptor Security Override Jumper Settings.....	62
Table 4-3: PCIe x16 Interface Setup.....	63
Table 4-4: BIOS Options and Configured USB Ports.....	63
Table 5-1: BIOS Navigation Keys .....	76
Table 5-2: BIOS Options and Configured USB Ports.....	109



# BIOS Menus

BIOS Menu 1: Main .....	78
BIOS Menu 2: Advanced .....	79
BIOS Menu 3: ACPI Configuration .....	80
BIOS Menu 4: RTC Wake Settings .....	81
BIOS Menu 5: Trusted Computing .....	82
BIOS Menu 6: CPU Information .....	83
BIOS Menu 7: SATA Configuration .....	86
BIOS Menu 8: USB Configuration .....	87
BIOS Menu 9: F81866 Super IO Configuration .....	88
BIOS Menu 10: Serial Port n Configuration Menu .....	89
BIOS Menu 11: Parallel Port Configuration Menu .....	94
BIOS Menu 12: F81866 H/W Monitor .....	96
BIOS Menu 13: Smart Fan Mode Configuration .....	97
BIOS Menu 14: F81216 Secondary Super IO Configuration .....	98
BIOS Menu 15: Serial Port n Configuration Menu .....	99
BIOS Menu 16: Serial Port Console Redirection .....	103
BIOS Menu 17: iEi Feature .....	106
BIOS Menu 18: Chipset .....	107
BIOS Menu 19: PCH-IO Configuration .....	108
BIOS Menu 20: PCI Express Configuration .....	110
BIOS Menu 21: PCH Azalia Configuration .....	111
BIOS Menu 22: System Agent (SA) Configuration .....	112
BIOS Menu 23: Graphics Configuration .....	113
BIOS Menu 24: LCD Control .....	115
BIOS Menu 25: NB PCIe Configuration .....	116
BIOS Menu 26: Memory Configuration .....	117
BIOS Menu 27: Boot .....	118
BIOS Menu 28: Security .....	120
BIOS Menu 29: Exit .....	121
BIOS Menu 30: IEI Feature .....	172




Chapter

1

# Introduction

---

## 1.1 Introduction

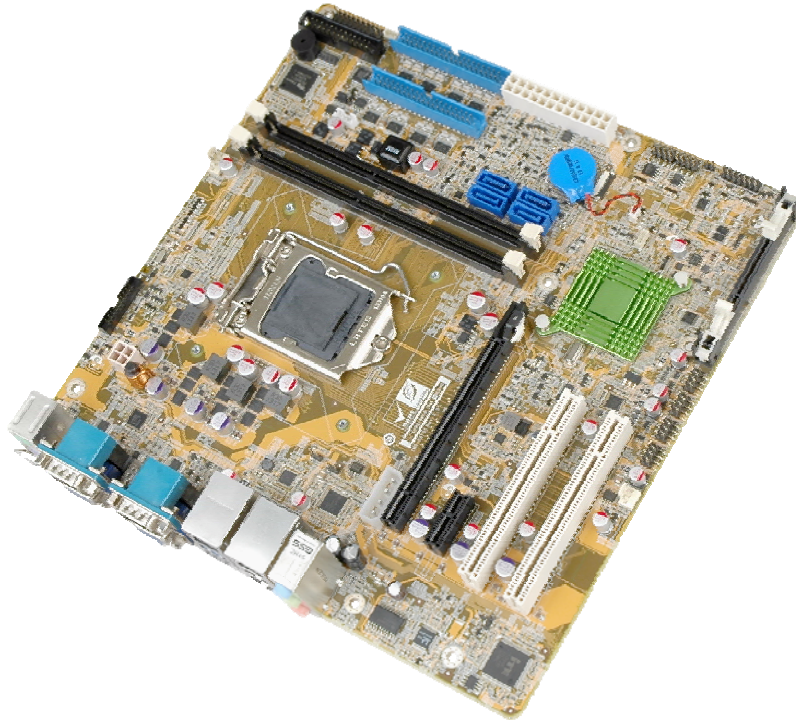

**Figure 1-1: IMB-H810-i2**

The IMB-H810-i2 is a microATX motherboard. It accepts a Socket LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor and supports two 240-pin 1333/1066 MHz dual-channel DDR3 DIMM modules up to 16.0 GB maximum.

The IMB-H810-i2 features Intelligent Platform Management Interface (IPMI) that helps lower the overall costs of server management by enabling users to maximize IT resource, save time and manage multiple systems. The IMB-H810-i2 supports IPMI 2.0 through the optional iRIS-2400 module.

The IMB-H810-i2 includes two VGA ports for easy dual independent display setup and one internal DisplayPort connector supporting HDMI, LVDS, VGA, DVI and DisplayPort with up to 3840 x 2160 resolutions. Expansion and I/O include two PCI slots, one PCIe x16 slot, one PCIe x1 slot, two USB 3.0 ports and two USB 2.0 on the rear panel, eight USB 2.0 by pin header, four SATA 6Gb/s connectors, ten COM ports, and two keyboard/mouse connectors.

## IMB-H810-i2 microATX Motherboard

### 1.2 Benefits

Some of the IMB-H810-i2 motherboard benefits include:

- Powerful graphics with multiple monitors
- Staying connected with both wired LAN connections
- Speedy running of multiple programs and applications

### 1.3 Features

Some of the IMB-H810-i2 motherboard features are listed below:

- microATX form factor
- RoHS compliant
- LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor supported
- Intel® H81 Chipset
- Two 240-pin 1333/1066 MHz dual-channel DDR3 DIMMs with up to 16.0 GB memory
- Two VGA ports for easy dual independent display setup
- Internal DisplayPort (iDP) interface supports HDMI, LVDS, VGA, DVI and DisplayPort with up to 3840 x 2160 resolutions
- Supports IPMI 2.0 via IEI iRIS-2400 module
- Two Intel® PCIe GbE connectors
- Four SATA 6Gb/s connectors
- Two PCI card expansion slots
- One PCIe x16 card expansion slot
- One PCIe x1 card expansion slot
- Multiple USB 3.0 and USB 2.0 ports
- Ten serial ports
- High Definition Audio



### 1.4 Connectors

The connectors on the IMB-H810-i2 are shown in the figure below.

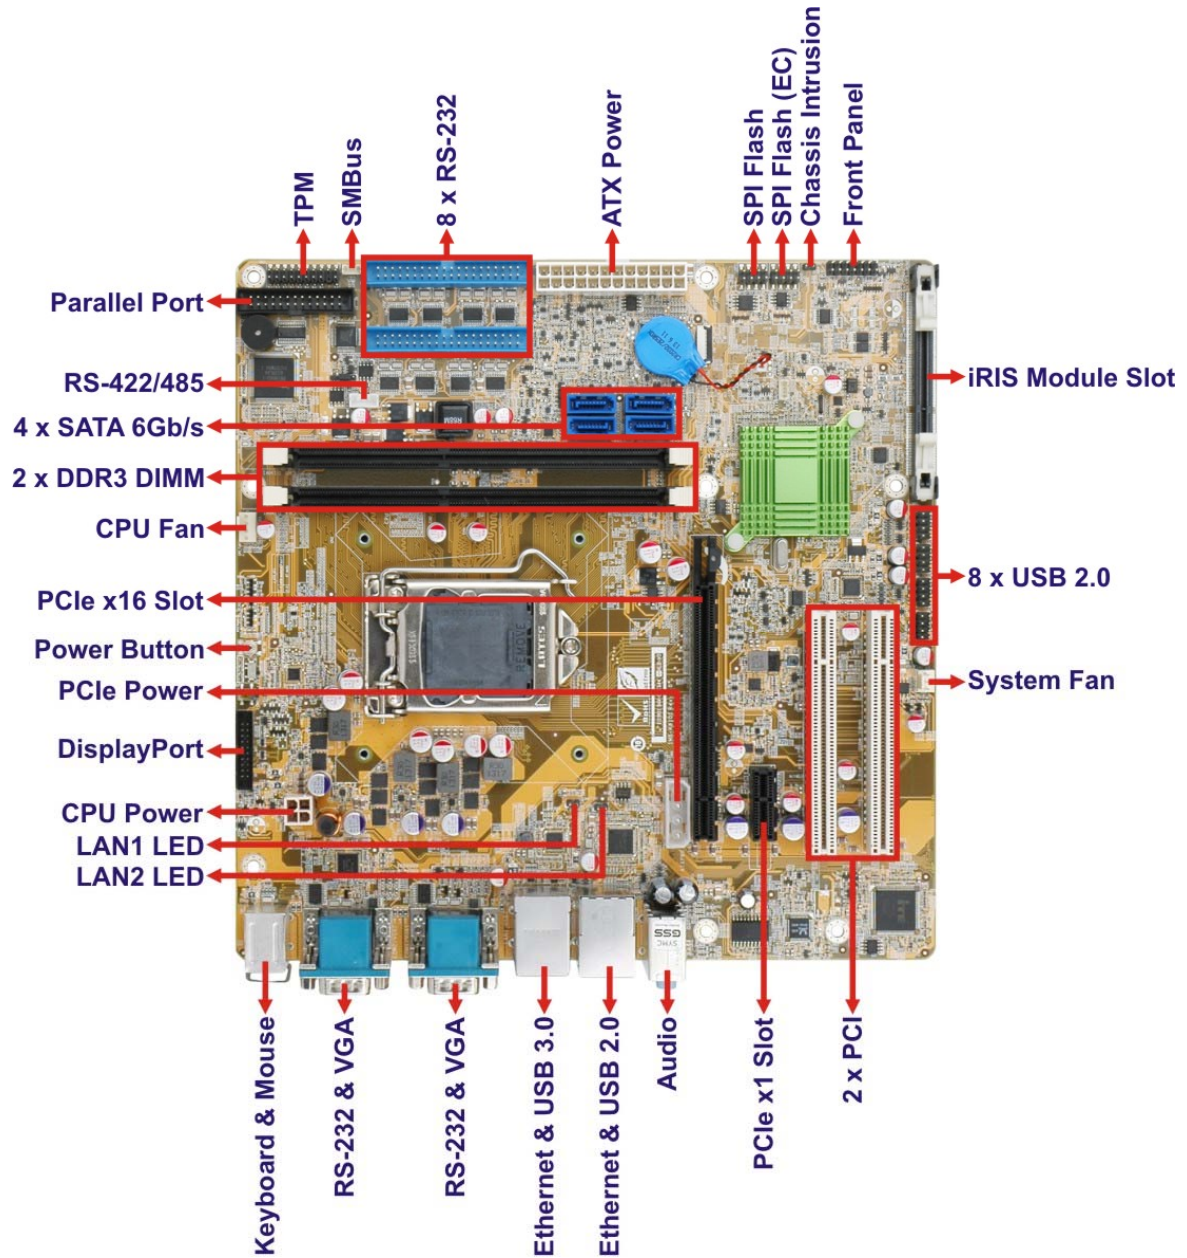


Figure 1-2: Connectors

IMB-H810-i2 microATX Motherboard

1.5 Dimensions

The main dimensions of the IMB-H810-i2 are shown in the diagram below.


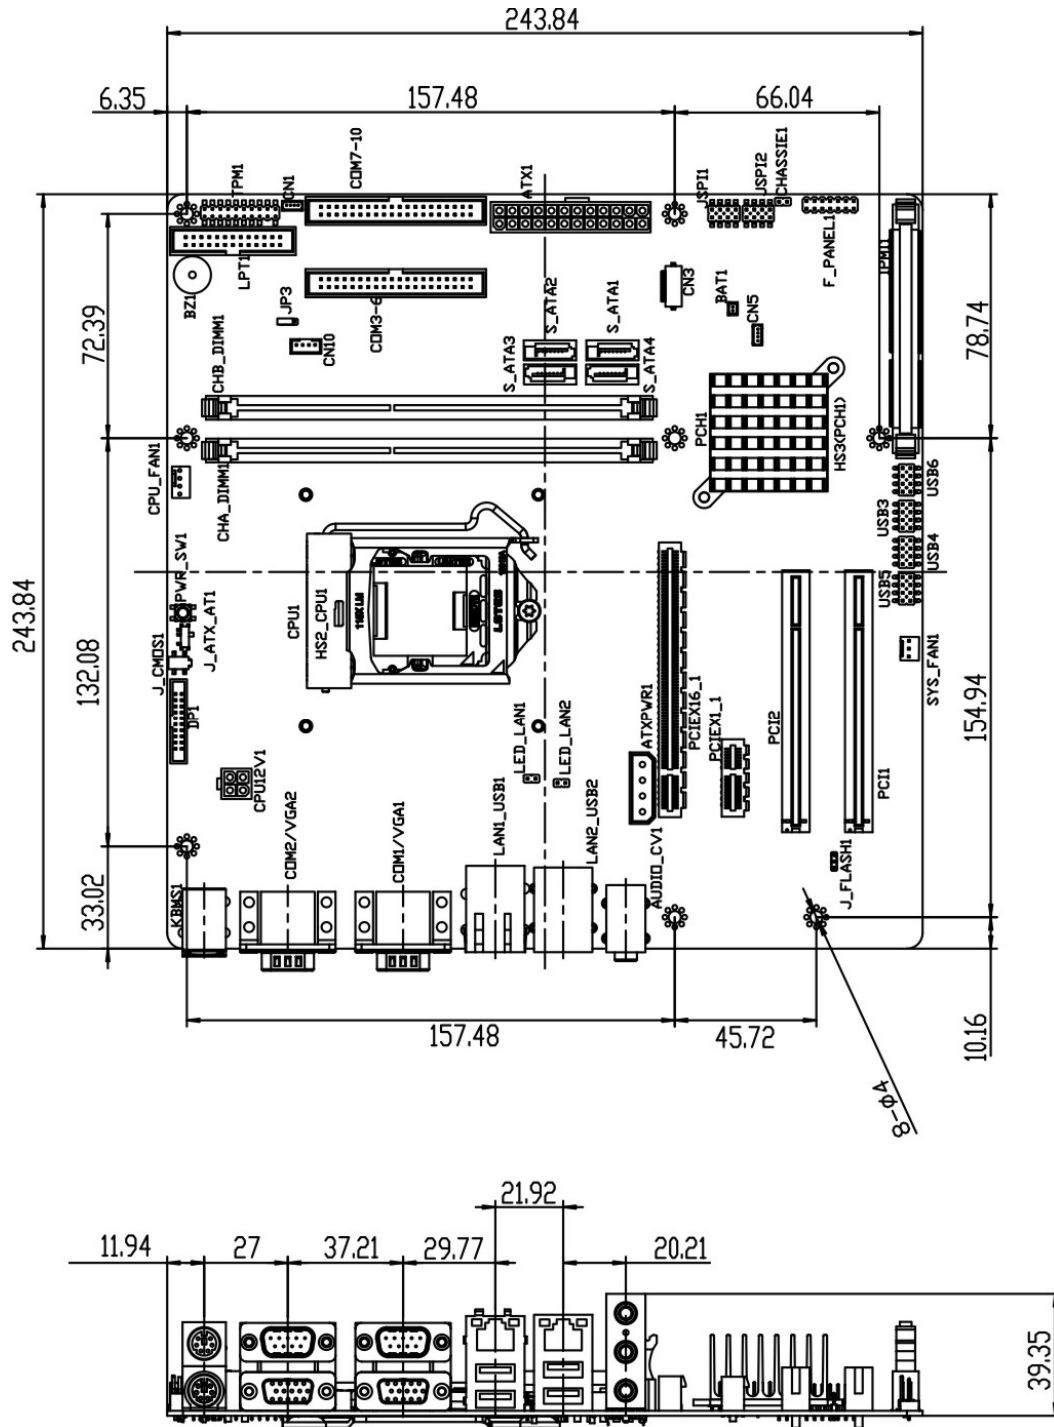


Figure 1-3: IMB-H810-i2 Dimensions (mm)

**1.6 Data Flow**

Figure 1-4 shows the data flow between the system chipset, the CPU and other components installed on the motherboard.

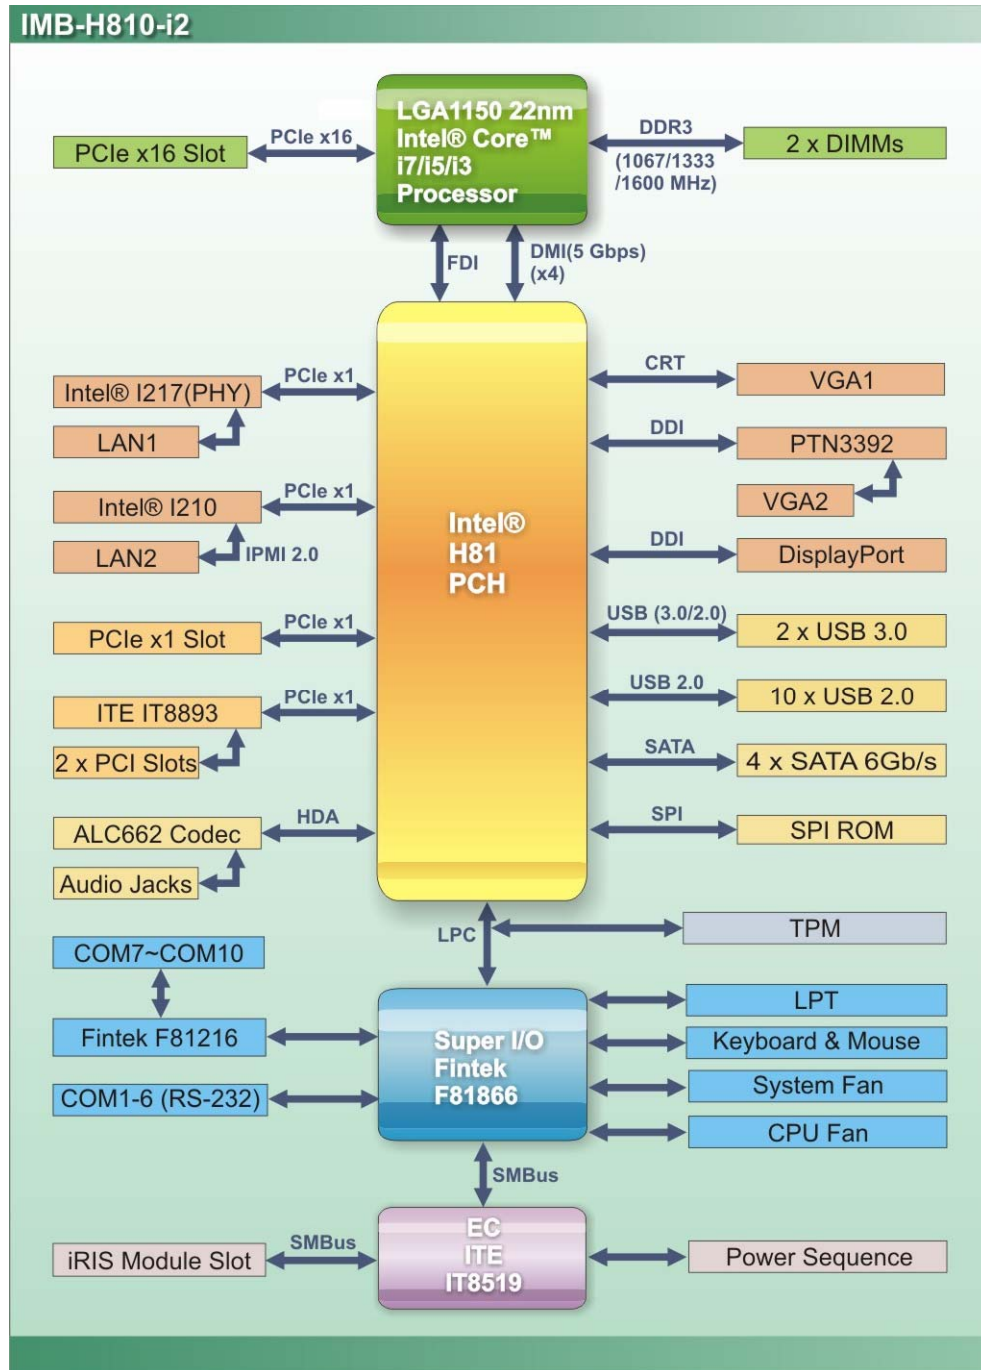

**Figure 1-4: Data Flow Diagram**



## IMB-H810-i2 microATX Motherboard

### 1.7 Technical Specifications

IMB-H810-i2 technical specifications are listed below.

Specification/Model	IMB-H810-i2
<b>Form Factor</b>	microATX
<b>CPU Supported</b>	LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor supported
<b>Chipset</b>	Intel® H81
<b>Integrated Graphics</b>	Intel® HD Graphics Gen 7.5 supports DirectX 11.1, OpenCL 1.2, OpenGL 3.2, Full MPEG2, VC1, AVC Decode
<b>Memory</b>	Two 240-pin 1333/1066 MHz dual-channel DDR3 SDRAM DIMMs support up to 16.0 GB maximum
<b>Audio</b>	Realtek ALC662 HD Audio codec (line-in, line-out, mic-in)
<b>BIOS</b>	UEFI BIOS
<b>Ethernet Controllers</b>	<b>LAN1:</b> Intel® I217LM PHY <b>LAN2:</b> Intel® I210-AT PCIe Ethernet controller with NCSI & IPMI 2.0 support
<b>Super I/O Controller</b>	Fintek F81866
<b>PCIe-to-PCI Bridge</b>	ITE IT8893E
<b>Embedded Controller</b>	ITE IT8519
<b>Watchdog Timer</b>	Software programmable supports 1~255 sec. system reset
<b>Expansion</b>	
<b>PCI</b>	Two PCI slots
<b>PCIe</b>	One PCIe x16 slot One PCIe x1 slot
<b>I/O Interface Connectors</b>	
<b>Audio Connectors</b>	Three external audio jacks (line-in, line-out, mic-in)
<b>Display Ports</b>	Two VGA integrated in the Intel® H81 (up to 1920x1200, 60Hz) One internal DisplayPort integrated in the Intel® H81 supports HDMI, LVDS, VGA, DVI, DisplayPort (up to 3840x2160, 60Hz)

<b>Specification/Model</b>	<b>IMB-H810-i2</b>
<b>Ethernet</b>	Two RJ-45 GbE ports
<b>IPMI 2.0</b>	Supported by the optional iRIS-2400 module
<b>Keyboard/Mouse</b>	One PS/2 keyboard connector One PS/2 mouse connector
<b>TPM</b>	One TPM connector via 20-pin header
<b>Serial Ports</b>	Two external RS-232 serial port One RS-422/485 via internal wafer connector Eight RS-232 via internal box headers
<b>USB ports</b>	Two external USB 3.0 ports on rear IO Two external USB 2.0 ports on rear IO Eight internal USB 2.0 ports by pin headers
<b>Serial ATA</b>	Four SATA 6Gb/s connectors
<b>LAN LED</b>	Two 2-pin LAN active LED connectors
<b>SMBus</b>	Supported by one 4-pin wafer connector
<b>Environmental and Power Specifications</b>	
<b>Power Supply</b>	AT/ATX power supported
<b>Power Consumption</b>	3.3V@0.64A, 5V@4.20A, 12V@0.14A, Vcore_12V@3.88A, 5VSB@0.20A (3.90GHz Intel® i7-4770K CPU with two 4GB 1333MHz DDR3 DIMMs)
<b>Operating Temperature</b>	-10°C ~ 60°C
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Humidity</b>	5% ~ 95% (non-condensing)
<b>Physical Specifications</b>	
<b>Dimensions</b>	244 mm x 244 mm
<b>Weight GW/NW</b>	1200 g / 680 g

Table 1-1: IMB-H810-i2 Specifications



Chapter

2

# Packing List

---

## 2.1 Anti-static Precautions

---



### WARNING!

Static electricity can destroy certain electronics. Make sure to follow the ESD precautions to prevent damage to the product, and injury to the user.

---

Make sure to adhere to the following guidelines:

- **Wear an anti-static wristband:** Wearing an anti-static wristband can prevent electrostatic discharge.
- **Self-grounding:** Touch a grounded conductor every few minutes to discharge any excess static buildup.
- **Use an anti-static pad:** When configuring any circuit board, place it on an anti-static mat.
- **Only handle the edges of the PCB:** Don't touch the surface of the motherboard. Hold the motherboard by the edges when handling.

## 2.2 Unpacking Precautions

When the IMB-H810-i2 is unpacked, please do the following:

- Follow the antistatic guidelines above.
- Make sure the packing box is facing upwards when opening.
- Make sure all the packing list items are present.

## IMB-H810-i2 microATX Motherboard






### 2.3 Packing List




#### NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the IMB-H810-i2 was purchased from or contact an IEI sales representative directly by sending an email to [sales@ieiworld.com.tw](mailto:sales@ieiworld.com.tw).

The IMB-H810-i2 is shipped with the following components:








Quantity	Item and Part Number	Image
1	IMB-H810-i2 single board computer	
2	SATA cable (P/N: 32000-062800-RS)	
1	I/O shielding (P/N: 45014-0041C0-00-RS)	
1	Mini jumper pack (2.54mm) (P/N:33101-000656-RS)	
1	Utility CD	

Quantity	Item and Part Number	Image
1	Quick Installation Guide	









**Table 2-1: Packing List**

## 2.4 Optional Items


The following are optional components which may be separately purchased:

Item and Part Number	Image
IPMI 2.0 adapter card with AST2400 BMC chip (P/N: iRIS-2400-R10)	
Dual-port USB cable with bracket (P/N: 19800-003100-200-RS)	
Dual-port USB 3.0 cable with bracket (P/N: 19800-010500-100-RS)	
SATA Power Cable (P/N: 32102-000100-200-RS)	
RS-422/485 cable, 200mm (P/N: 32205-003800-100-RS)	
Quad port RS-232 cable with bracket (400/400/400/400MM) (P/N: 32205-001203-100-RS)	
KB/MS cable (P/N: 19800-000075-RS)	

## IMB-H810-i2 microATX Motherboard

Item and Part Number	Image
Parallel port cable (P/N:19800-000049-RS)	
LGA1155/LGA1156 cooler kit (1U chassis compatible, 73W) (P/N: CF-1156A-RS-R11)	
LGA1155/LGA1156 cooler kit (95W) (P/N: CF-1156E-R11)	
DisplayPort to HDMI converter board for iEi IDP connector (P/N: DP-HDMI-R10)	
DisplayPort to 24-bit dual-channel LVDS converter board for iEi IDP connector (P/N: DP-LVDS-R10)	
DisplayPort to VGA converter board for iEi IDP connector (P/N: DP-VGA-R10)	
DisplayPort to DVI-D converter board for iEi IDP connector (P/N: DP-DVI-R10)	
DisplayPort to DisplayPort converter board for iEi IDP connector (P/N: DP-DP-R10)	



Item and Part Number	Image
20-pin Infineon TPM Module, S/W management tool, firmware V3.17 (P/N: TPM-IN01-R11)	

**Table 2-2: Optional Items**

Chapter

**3**

# Connectors

---

### 3.1 Peripheral Interface Connectors

This chapter details all the jumpers and connectors.

#### 3.1.1 IMB-H810-i2 Layout

The figures below show all the connectors and jumpers.

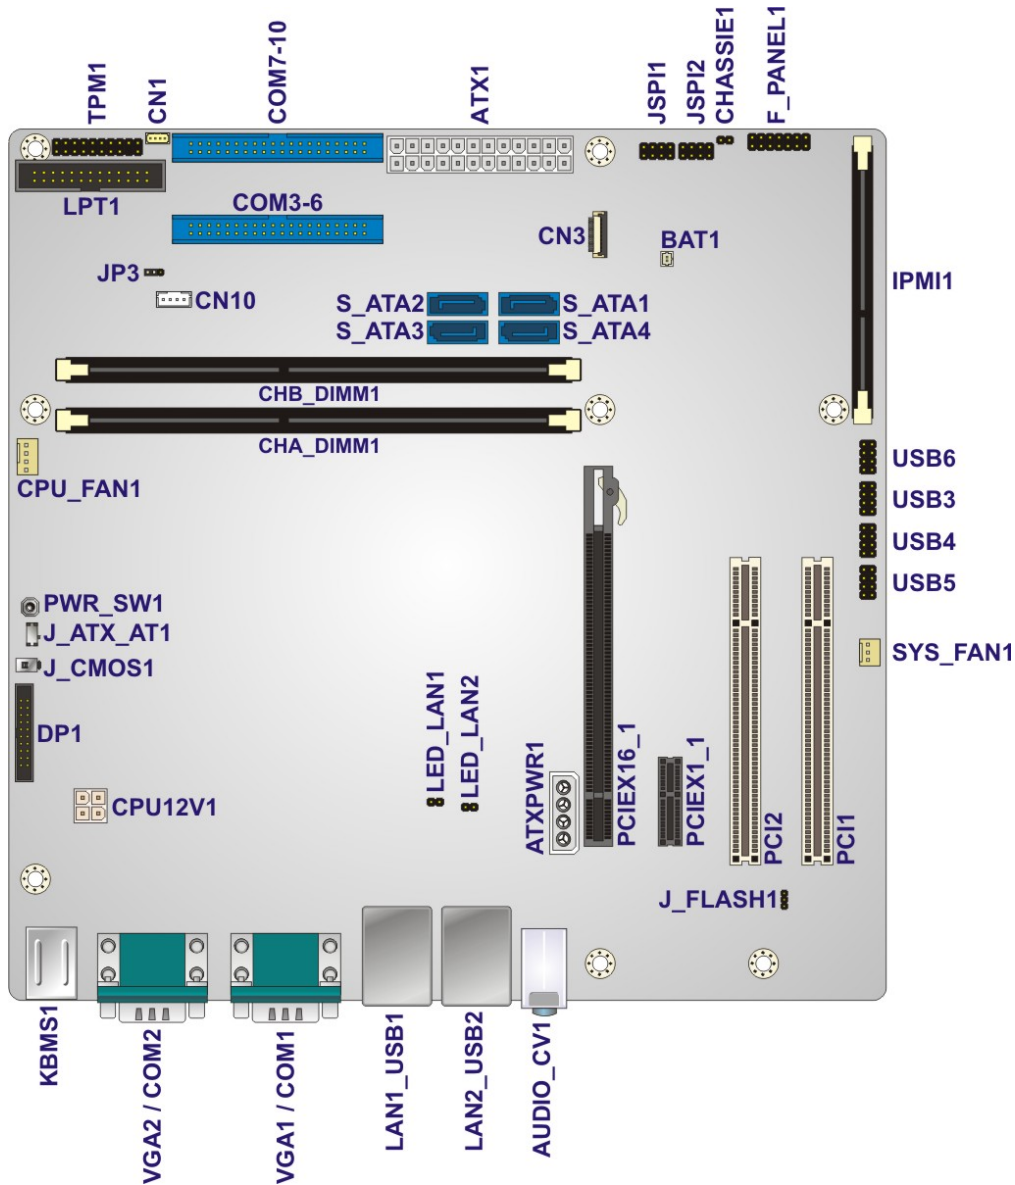


Figure 3-1: Connectors and Jumpers

## IMB-H810-i2 microATX Motherboard

### 3.1.2 Peripheral Interface Connectors

The table below lists all the connectors on the board.

Connector	Type	Label
ATX Power connector	24-pin connector	ATX1
Battery connector	2-pin wafer	BAT1
Chassis intrusion connector	2-pin header	CHASSIE1
CPU power connector	4-pin connector	CPU12V1
DisplayPort connector	19-pin box header	DP1
EC debug connector	20-pin FPC connector	CN3
Fan connector (CPU)	4-pin wafer	CPU_FAN1
Fan connectors (system)	3-pin wafer	SYS_FAN1
Front panel connector	14-pin header	F_PANEL1
iRIS module connector	204-pin DDR3 SO-DIMM slot	IPMI1
LAN1 LED connector	2-pin header	LED_LAN1
LAN2 LED connector	2-pin header	LED_LAN2
Memory card slot	DIMM slot	CHA_DIMM1, CHB_DIMM1
Parallel port connector	26-pin box header	LPT1
PCI slots	PCI slot	PCI1, PCI2
PCIe x1 slot	PCIe x1 slot	PCIEX1_1
PCIe x16 slot	PCIe x16 slot	PCIEX16_1
PCIe power connector	4-pin connector	ATXPWR1
Power button	Push button	PWR_SW1
SATA 6Gb/s drive connectors	7-pin SATA connector	S_ATA1, S_ATA2, S_ATA3, S_ATA 4
Serial port, RS-232	40-pin box header	COM3-6, COM7-10
Serial port, RS-422/485	4-pin wafer	CN10

Connector	Type	Label
SMBus connector	4-pin wafer	CN1
SPI flash connector	8-pin header	JSPI1
SPI flash connector, EC	8-pin header	JSPI2
TPM connector	20-pin header	TPM1
USB 2.0 connectors	8-pin headers	USB3, USB4, USB5, USB6

**Table 3-1: Peripheral Interface Connectors**

### 3.1.3 External Interface Panel Connectors

The table below lists the connectors on the external I/O panel.

Connector	Type	Label
Audio connector	Audio jacks	AUDIO_CV1
Keyboard/Mouse and USB 2.0 ports	PS/2, USB 2.0	KBMS1
Ethernet and USB 2.0 ports	RJ-45, USB 2.0	LAN2_USB2
Ethernet and USB 3.0 ports	RJ-45, USB 3.0	LAN1_USB1
Serial Port connectors	9-pin male DB-9	COM1, COM2
VGA connectors	15-pin female	VGA1, VGA2

**Table 3-2: Rear Panel Connectors**

## 3.2 Internal Peripheral Connectors

The section describes all of the connectors on the IMB-H810-i2.


### 3.2.1 ATX Power Connector

<b>CN Label:</b>	<b>ATX1</b>
<b>CN Type:</b>	24-pin ATX
<b>CN Location:</b>	See <b>Figure 3-2</b>
<b>CN Pinouts:</b>	See <b>Table 3-3</b>



## IMB-H810-i2 microATX Motherboard

The ATX power connector connects to an ATX power supply.

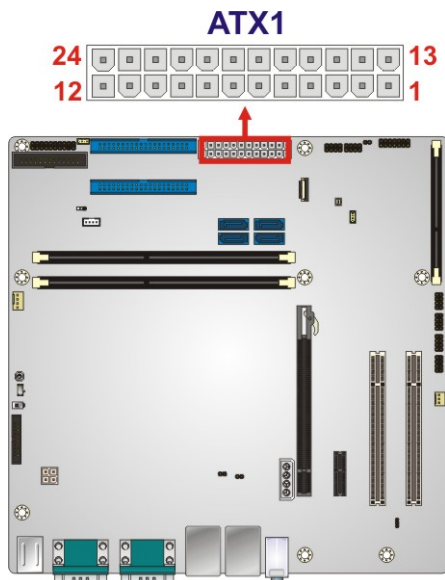

**Figure 3-2: ATX Power Connector Location**

Pin	Description	Pin	Description
1	+3.3V	13	+3.3V
2	+3.3V	14	-12V
3	GND	15	GND
4	+5V	16	PS_ON
5	GND	17	GND
6	+5V	18	GND
7	GND	19	GND
8	Power good	20	-5V
9	5VSB	21	+5V
10	+12V	22	+5V
11	+12V	23	+5V
12	+3.3V	24	GND

**Table 3-3: ATX Power Connector Pinouts**

**3.2.2 Battery Connector**




**CAUTION:**

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- CN Label:**            **BAT1**
- CN Type:**            2-pin wafer
- CN Location:**      See **Figure 3-3**
- CN Pinouts:**        See **Table 3-4**

A system battery is placed in the battery holder. The battery provides power to the system clock to retain the time when power is turned off.

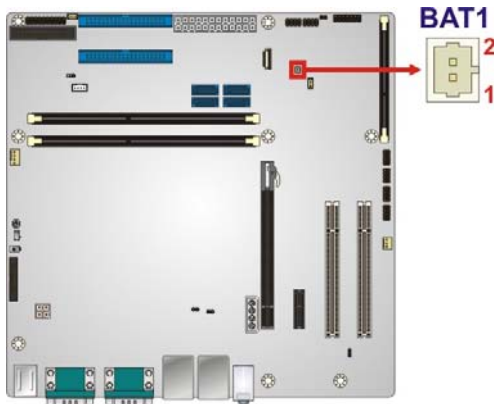

**Figure 3-3: Battery Connector Location**

Pin	Description
1	GND
2	VBATT


**Table 3-4: Battery Connector Pinouts**

## IMB-H810-i2 microATX Motherboard

### 3.2.3 Chassis Intrusion Connector

- CN Label:** CHASSIE1
- CN Type:** 2-pin header
- CN Location:** See **Figure 3-4**
- CN Pinouts:** See **Table 3-5**

The chassis intrusion connector is for a chassis intrusion detection sensor or switch that detects if a chassis component is removed or replaced.

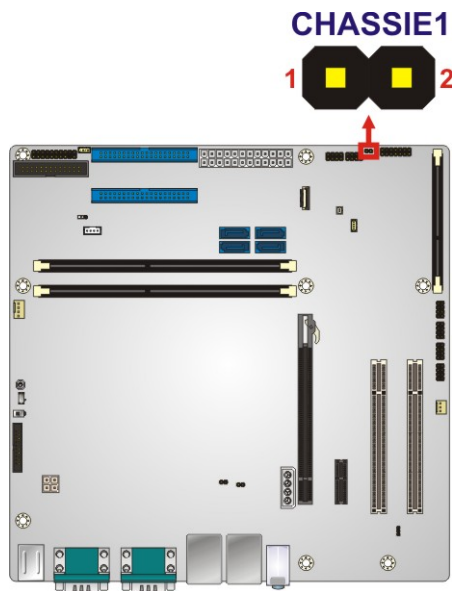

**Figure 3-4: Chassis Intrusion Connector Location**

Pin	Description
1	Pull High +3.3V
2	CHASSIS OPEN

**Table 3-5: Chassis Intrusion Connector Pinouts**


### 3.2.4 CPU Power Connector

- CN Label:** CPU12V1
- CN Type:** 4-pin connector

**CN Location:** See **Figure 3-5**

**CN Pinouts:** See **Table 3-6**

The CPU power input connector provides power to the CPU.

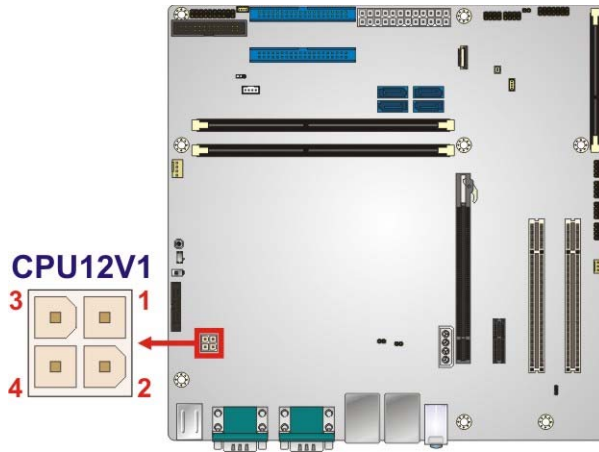

**Figure 3-5: CPU Power Connector Location**

PIN NO.	DESCRIPTION
1	GND
2	GND
3	+12V
4	+12V

**Table 3-6: CPU Power Connector Pinouts**

### 3.2.5 DisplayPort Connector

**CN Label:** DP1


**CN Type:** 19-pin box header

**CN Location:** See **Figure 3-6**

**CN Pinouts:** See **Table 3-7**

The DisplayPort connector supports HDMI, LVDS, VGA, DVI and DisplayPort graphics interfaces with up to 3840x2160 resolutions.

**IMB-H810-i2 microATX Motherboard**

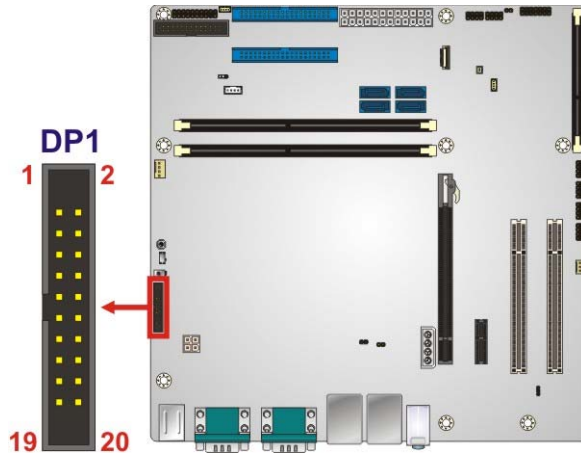

**Figure 3-6: DisplayPort Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V	11	AUXP
2	LANE1N	12	AUXN
3	LANE1P	13	GND
4	GND	14	LANE2P
5	LANE3N	15	LANE2N
6	LANE3P	16	GND
7	GND	17	LANE0P
8	AUX_CTRL_DET_D	18	LANE0N
9	GND	19	+3.3V
10	HPD		


**Table 3-7: DisplayPort Connector Pinouts**

**3.2.6 Fan Connector (CPU)**

- CN Label:** CPU\_FAN1
- CN Type:** 4-pin wafer
- CN Location:** See **Figure 3-7**
- CN Pinouts:** See **Table 3-8**

The fan connector attaches to a CPU cooling fan.



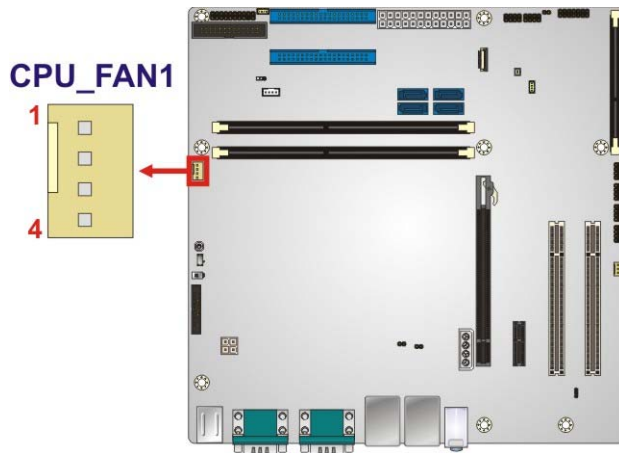

**Figure 3-7: CPU Fan Connector Location**

PIN NO.	DESCRIPTION
1	GND
2	+12 V
3	FANIO
4	PWM


**Table 3-8: CPU Fan Connector Pinouts**

### 3.2.7 Fan Connectors (System)

- CN Label:**       **SYS\_FAN1**
- CN Type:**        3-pin wafer
- CN Location:**   See **Figure 3-8**
- CN Pinouts:**    See **Table 3-9**

Each fan connector attaches to a system cooling fan.

## IMB-H810-i2 microATX Motherboard

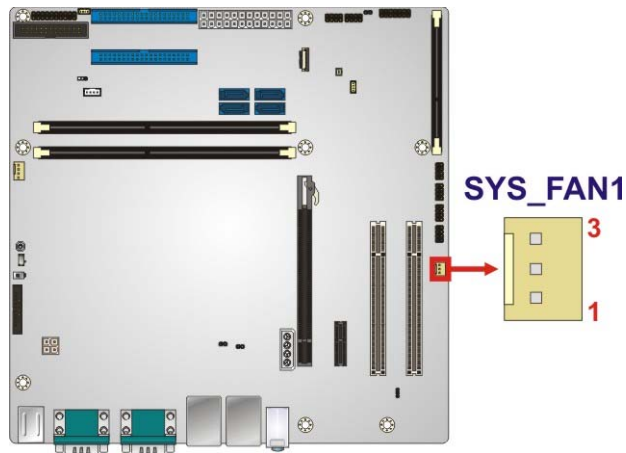

**Figure 3-8: System Fan Connector Locations**


PIN NO.	DESCRIPTION
1	FANIO
2	+12 V (PWM)
3	GND

**Table 3-9: System Fan Connector Pinouts**

### 3.2.8 Front Panel Connector

<b>CN Label:</b>	<b>F_PANEL1</b>
<b>CN Type:</b>	14-pin header
<b>CN Location:</b>	See <b>Figure 3-9</b>
<b>CN Pinouts:</b>	See <b>Table 3-10</b>

The front panel connector connects to the indicator LEDs and buttons on the computer's front panel.

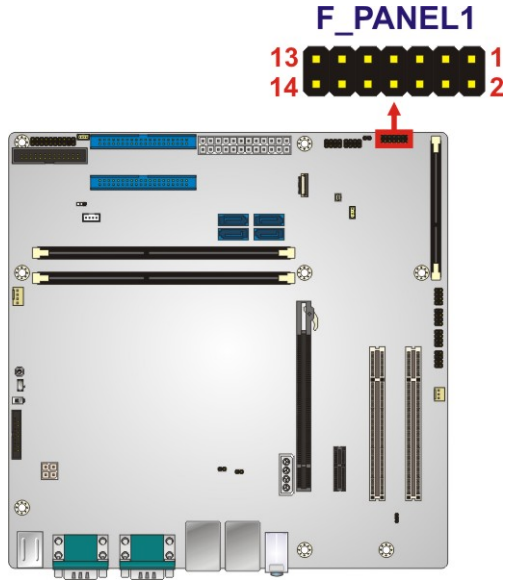

**Figure 3-9: Front Panel Connector Location**

FUNCTION	PIN	DESCRIPTION	FUNCTION	PIN	DESCRIPTION
Power LED	1	PWR_LED+	Speaker	2	Speaker+
	3	NC		IPMI LED	4
	5	PWR_LED-	6		IPMI ID_LED-
Power Button	7	PWR_BTN+	Speaker	8	Speaker-
	9	PWR_BTN-		10	NC
HDD LED	11	HDD_LED+	Reset	12	RESET+
	13	HDD_LED-		14	RESET-

**Table 3-10: Front Panel Connector Pinouts**

### 3.2.9 iRIS Module Slot

- CN Label:** IPMI1
- CN Type:** 204-pin DDR3 SO-DIMM slot
- CN Location:** See **Figure 3-10**

The iRIS module slot is used to install the IEI iRIS-2400 IPMI 2.0 module.

## IMB-H810-i2 microATX Motherboard



### WARNING:

The iRIS module slot is designed to install the IEI iRIS-2400 IPMI 2.0 module only. DO NOT install other modules into the iRIS module slot. Doing so may cause damage to the IMB-H810-i2.

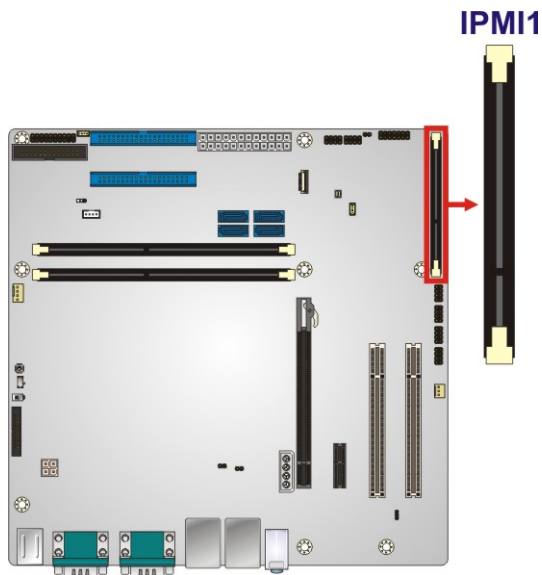



Figure 3-10: iRIS Module Slot Location

### 3.2.10 LAN LED Connectors

<b>CN Label:</b>	<b>LED_LAN1, LED_LAN2</b>
<b>CN Type:</b>	2-pin header
<b>CN Location:</b>	See <b>Figure 3-11</b>
<b>CN Pinouts:</b>	See <b>Table 3-11</b> and <b>Table 3-12</b>

The LAN LED connectors are used to connect to the LAN LED indicators on the chassis to indicate users the link activities of the two LAN ports.



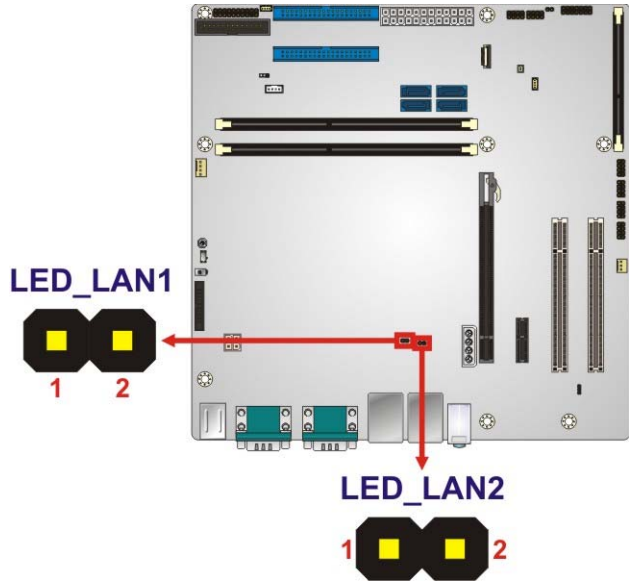

**Figure 3-11: LAN LED Connector Locations**

Pin	Description
1	Active+
2	Active-

**Table 3-11: LAN1 LED Connector (LED\_LAN1) Pinouts**

Pin	Description
1	Active+
2	Active-

**Table 3-12: LAN2 LED Connector (LED\_LAN2) Pinouts**

**3.2.11 Memory Card Slots**

- CN Label:** CHA\_DIMM1, CHB\_DIMM1
- CN Type:** DDR3 DIMM slot
- CN Location:** See Figure 3-12

The DIMM slots are for DDR3 DIMM memory modules.

## IMB-H810-i2 microATX Motherboard


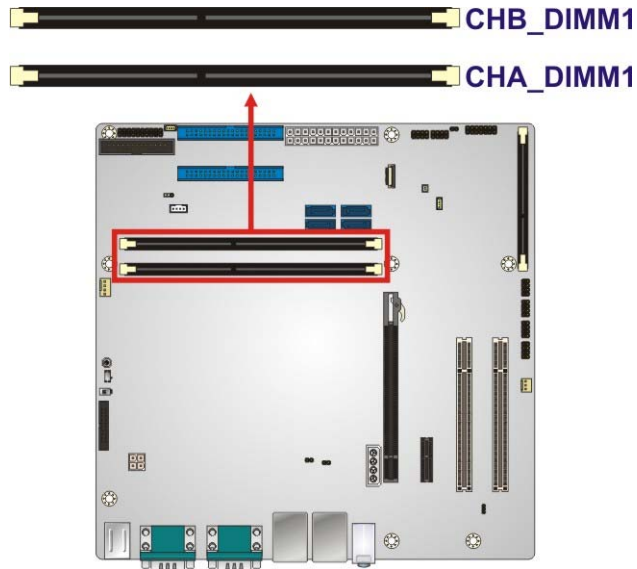


Figure 3-12: Memory Card Slot Locations

### 3.2.12 Parallel Port Connector

<b>CN Label:</b>	LPT1
<b>CN Type:</b>	26-pin box header
<b>CN Location:</b>	See <b>Figure 3-13</b>
<b>CN Pinouts:</b>	See <b>Table 3-13</b>

The parallel port connector connects to a parallel port connector interface or some other parallel port device such as a printer.

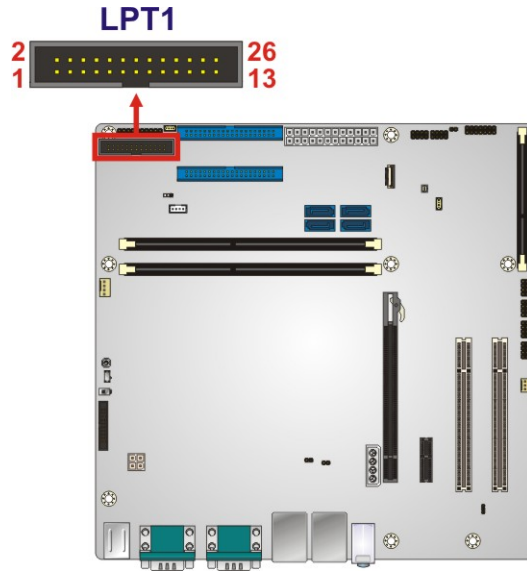

**Figure 3-13: Parallel Port Connector Location**

Pin	Description	Pin	Description
1	STROBE#	2	DATA 0
3	DATA 1	4	DATA 2
5	DATA 3	6	DATA 4
7	DATA 5	8	DATA 6
9	DATA 7	10	ACKNOWLEDGE#
11	BUSY	12	PAPER EMPTY
13	PRINTER SELECT	14	AUTO FORM FEED #
15	ERROR#	16	INITIALIZE#
17	PRINTER SELECT LN#	18	GROUND
19	GROUND	20	GROUND
21	GROUND	22	GROUND
23	GROUND	24	GROUND
25	GROUND	26	NC


**Table 3-13: Parallel Port Connector Pinouts**

## IMB-H810-i2 microATX Motherboard

### 3.2.13 PCI Express Power Connector

- CN Label:** ATXPWR1
- CN Type:** 4-pin connector
- CN Location:** See **Figure 3-14**
- CN Pinouts:** See **Table 3-14**

The PCIe power connector provides extra power to the PCIe expansion card.

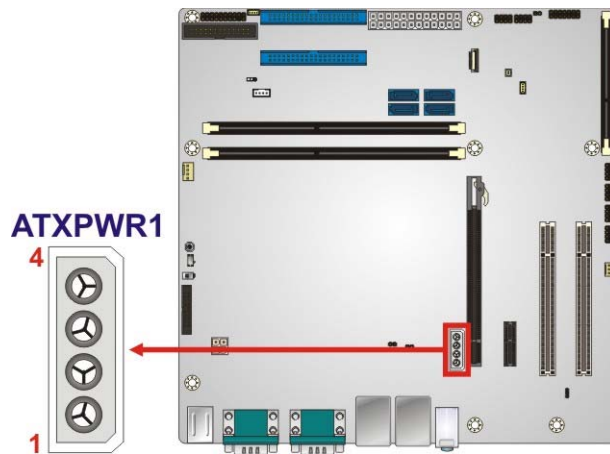

**Figure 3-14: PCIe Power Location**


Pin	Description
1	+12V
2	GND
3	GND
4	+5V

**Table 3-14: PCIe Power Pinouts**

### 3.2.14 Power Button

- CN Label:** PWR\_SW1
- CN Type:** Push button
- CN Location:** See **Figure 3-15**

The on-board power button controls system power.

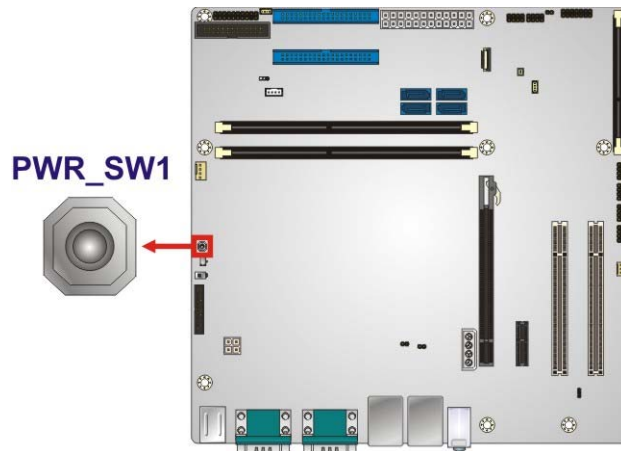

**Figure 3-15: Power Button Location**

### 3.2.15 SATA 6Gb/s Drive Connectors

**CN Label:** S\_ATA1, S\_ATA2, S\_ATA3, S\_ATA4

**CN Type:** 7-pin SATA drive connectors


**CN Location:** See **Figure 3-16**

**CN Pinouts:** See **Table 3-15**

The SATA drive connectors can be connected to SATA drives.



**IMB-H810-i2 microATX Motherboard**

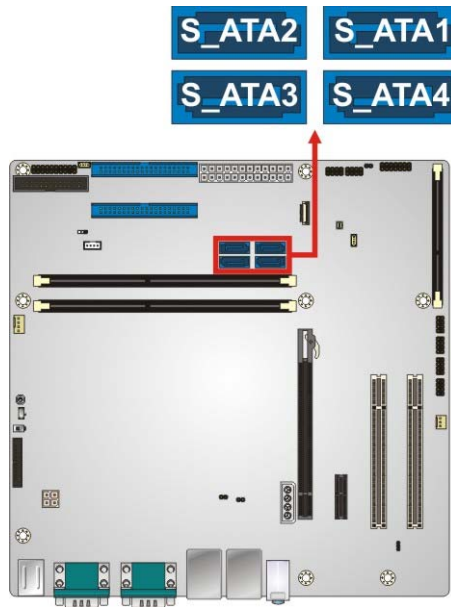

**Figure 3-16: SATA 6Gb/s Drive Connector Locations**


Pin	Description
1	GND
2	SATA_TX+
3	SATA_TX-
4	GND
5	SATA_RX-
6	SATA_RX+
7	GND

**Table 3-15: SATA 6Gb/s Drive Connector Pinouts**

**3.2.16 Serial Port Connectors (COM3~COM6), RS-232**

- CN Label:** COM3-6
- CN Type:** 40-pin box header
- CN Location:** See **Figure 3-17**
- CN Pinouts:** See **Table 3-16**

The connector provides four RS-232 ports connection.

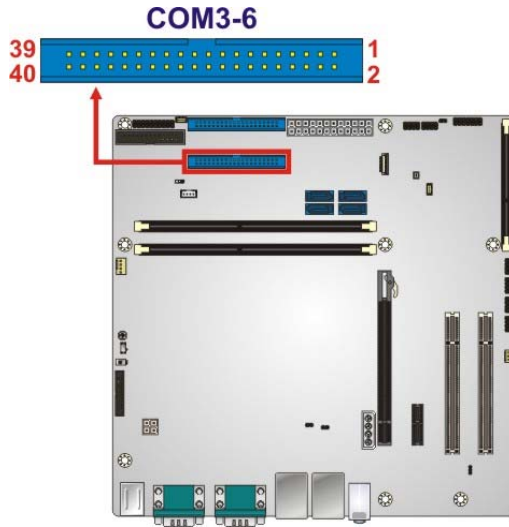

**Figure 3-17: Serial Port Connector (COM3~COM6) Location**

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM3	1	DCD	2	DSR
	3	RXD	4	RTS
	5	TXD	6	CTS
	7	DTR	8	RI
	9	GND	10	GND
COM4	11	DCD	12	DSR
	13	RXD	14	RTS
	15	TXD	16	CTS
	17	DTR	18	RI
	19	GND	20	GND
COM5	21	DCD	22	DSR
	23	RXD	24	RTS
	25	TXD	26	CTS
	27	DTR	28	RI
	29	GND	30	GND
COM6	31	DCD	32	DSR
	33	RXD	34	RTS
	35	TXD	36	CTS
	37	DTR	38	RI

## IMB-H810-i2 microATX Motherboard


	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
	39	GND	40	GND

**Table 3-16: COM3~6 Serial Port Connector Pinouts**

### 3.2.17 Serial Port Connectors (COM7~COM10), RS-232

- CN Label:** COM7-10
- CN Type:** 40-pin box header
- CN Location:** See **Figure 3-18**
- CN Pinouts:** See **Table 3-17**

The connector provides four RS-232 ports connection.

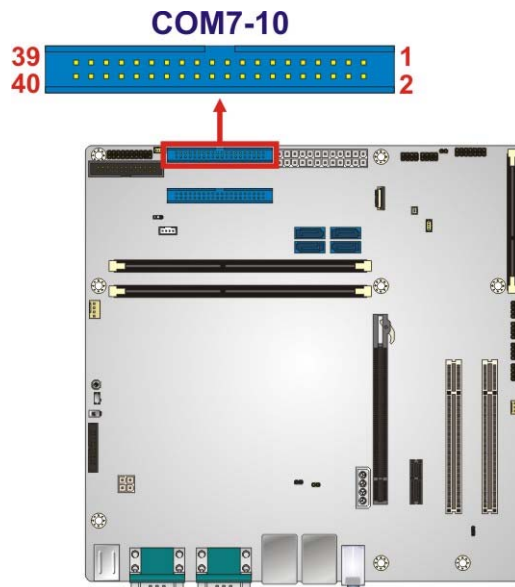

**Figure 3-18: Serial Port Connector (COM7~COM10) Location**

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM7	1	DCD	2	DSR
	3	RXD	4	RTS
	5	TXD	6	CTS
	7	DTR	8	RI
	9	GND	10	GND

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM8	11	DCD	12	DSR
	13	RXD	14	RTS
	15	TXD	16	CTS
	17	DTR	18	RI
	19	GND	20	GND
COM9	21	DCD	22	DSR
	23	RXD	24	RTS
	25	TXD	26	CTS
	27	DTR	28	RI
	29	GND	30	GND
COM10	31	DCD	32	DSR
	33	RXD	34	RTS
	35	TXD	36	CTS
	37	DTR	38	RI
	39	GND	40	GND

**Table 3-17: COM7~10 Serial Port Connector Pinouts**

### 3.2.18 Serial Port Connector (COM10), RS-422/485

- CN Label:** CN10
- CN Type:** 4-pin wafer
- CN Location:** See **Figure 3-19**
- CN Pinouts:** See **Table 3-18**

Used for RS-422/485 communications.

IMB-H810-i2 microATX Motherboard

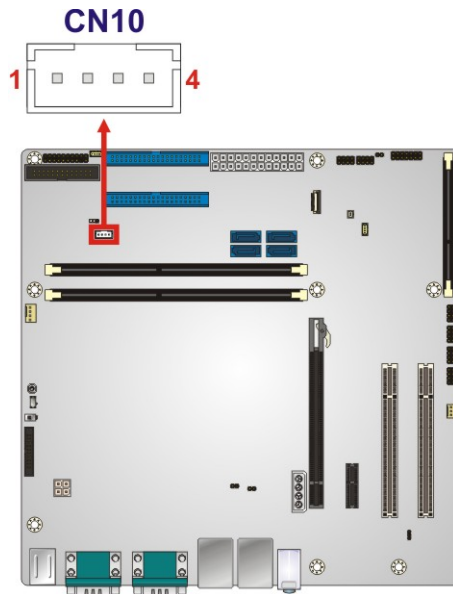


Figure 3-19: RS-422/485 Connector Location

PIN NO.	DESCRIPTION
1	RXD422-
2	RXD422+
3	TXD422+ / TXD485+
4	TXD422- / TXD485-

Table 3-18: RS-422/485 Connector Pinouts

Use the optional RS-422/485 cable to connect to a serial device. The pinouts of the DB-9 connector are listed below.

RS-422 Pinouts	RS-485 Pinouts


Table 3-19: DB-9 RS-422/485 Pinouts



**3.2.19 SMBus Connector**

- CN Label:** CN1
- CN Type:** 4-pin wafer
- CN Location:** See **Figure 3-20**
- CN Pinouts:** See **Table 3-20**

The SMBus (System Management Bus) connector provides low-speed system management communications.

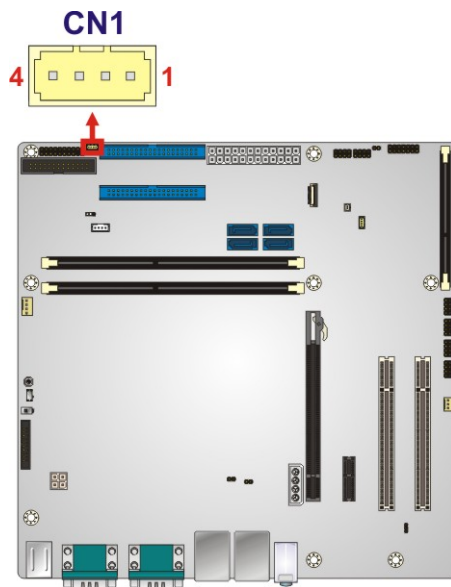

**Figure 3-20: SMBus Connector Location**

PIN	DESCRIPTION
1	GND
2	SMB_DATA
3	SMB_CLK
4	+5V


**Table 3-20: SMBus Connector Pinouts**

## IMB-H810-i2 microATX Motherboard

### 3.2.20 SPI Flash Connector

- CN Label:** JSPI1  
**CN Type:** 8-pin header  
**CN Location:** See **Figure 3-21**  
**CN Pinouts:** See **Table 3-21**

The SPI flash connector is used to flash the SPI ROM.

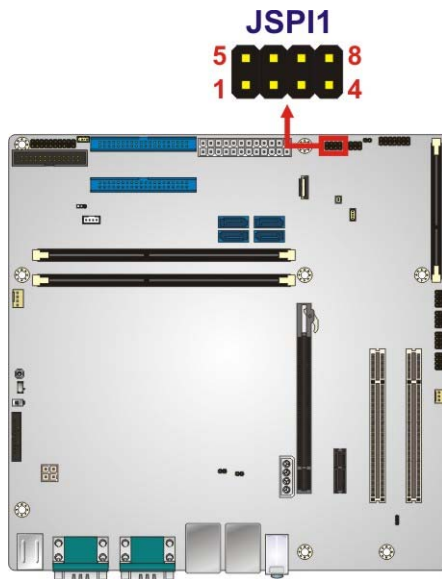

**Figure 3-21: SPI Flash Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

**Table 3-21: SPI Flash Connector Pinouts**


### 3.2.21 SPI Flash Connector, EC

- CN Label:** JSPI2  
**CN Type:** 8-pin header

**CN Location:** See **Figure 3-22**

**CN Pinouts:** See **Table 3-22**

The SPI flash connector is used to flash the EC ROM.

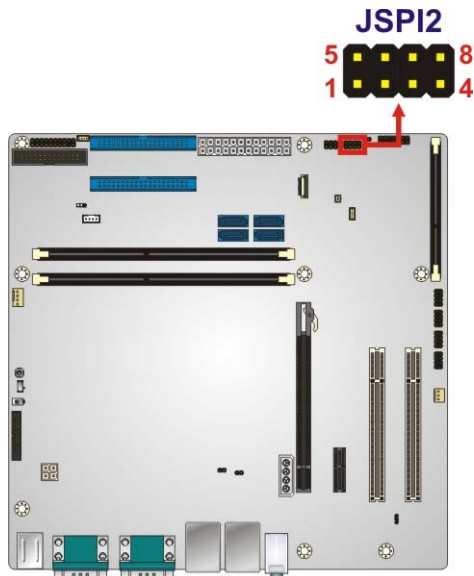

**Figure 3-22: SPI EC Flash Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

**Table 3-22: SPI EC Flash Connector Pinouts**

### 3.2.22 TPM Connector

**CN Label:** **TPM1**


**CN Type:** 20-pin header

**CN Location:** See **Figure 3-23**

**CN Pinouts:** See **Table 3-23**

The TPM connector connects to a TPM module.

**IMB-H810-i2 microATX Motherboard**

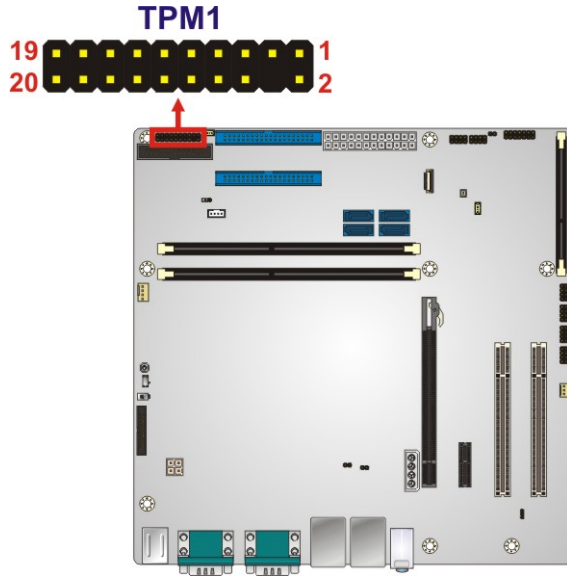

**Figure 3-23: TPM Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	LCLK	2	GND
3	LFRAME#	4	KEY
5	LRERST#	6	+5V
7	LAD3	8	LAD2
9	+3.3V	10	LAD1
11	LAD0	12	GND
13	SCL	14	SDA
15	SB3V	16	SERIRQ
17	GND	18	GLKRUN#
19	LPCPD#	20	LDRQ#

**Table 3-23: TPM Connector Pinouts**

**3.2.23 USB 2.0 Connectors**


**CN Label:** USB3, USB4, USB5, USB6

**CN Type:** 8-pin header

**CN Location:** See **Figure 3-24**

**CN Pinouts:** See **Table 3-24**

The USB 2.0 connectors connect to USB 2.0 devices. Each pin header provides two USB 2.0 ports.

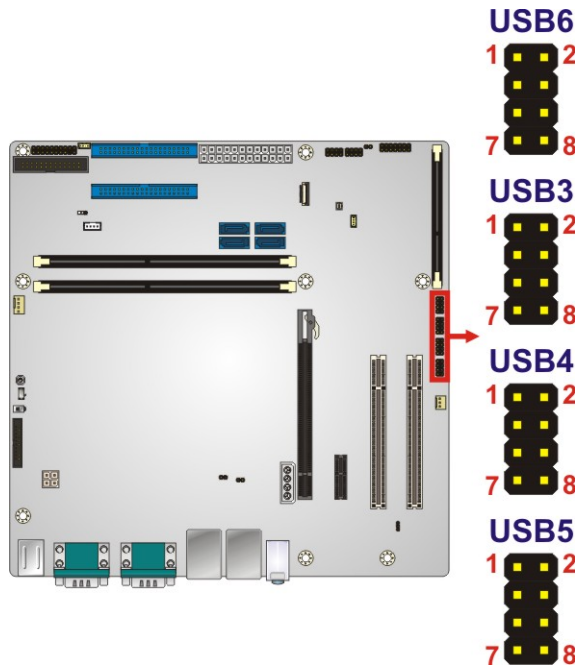

**Figure 3-24: USB 2.0 Connector Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	2	GND
3	USB_DATA-	4	USB_DATA+
5	USB_DATA+	6	USB_DATA-
7	GND	8	VCC

**Table 3-24: USB 2.0 Connector Pinouts**

### 3.3 External Peripheral Interface Connector Panel

The figure below shows the external peripheral interface connector (EPIC) panel. The EPIC panel consists of the following:



IMB-H810-i2 microATX Motherboard

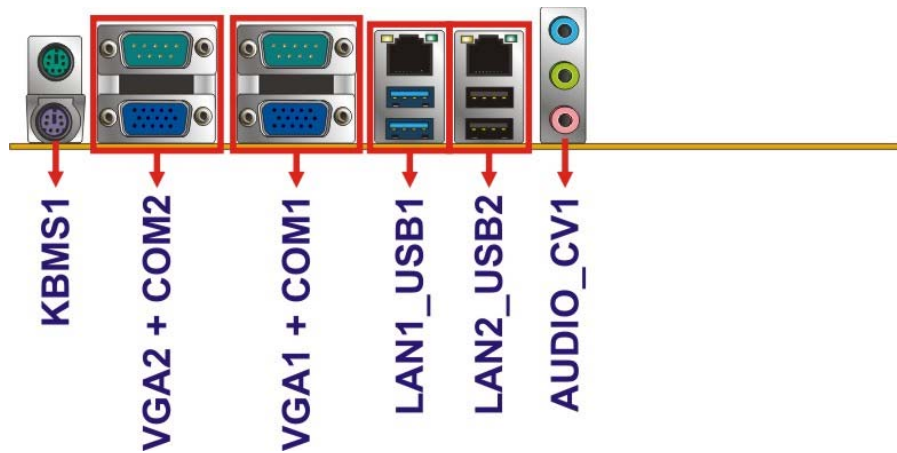


Figure 3-25: External Peripheral Interface Connector

3.3.1 Audio Connector

CN Label:	AUDIO_CV1
CN Type:	Audio jack
CN Location:	See Figure 3-25

The audio jacks connect to external audio devices.

- **Line In port (Light Blue):** Connects a CD-ROM, DVD player, or other audio devices.
- **Line Out port (Lime):** Connects to a headphone or a speaker. With multi-channel configurations, this port can also connect to front speakers.
- **Microphone (Pink):** Connects a microphone.

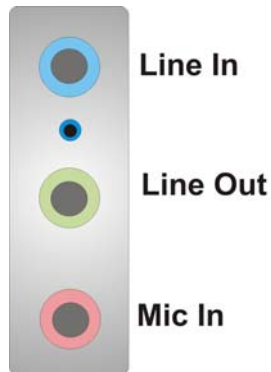


Figure 3-26: Audio Connector


**3.3.2 Keyboard and Mouse Connectors**

- CN Label:** KBMS1
- CN Type:** PS/2
- CN Location:** See **Figure 3-25**
- CN Pinouts:** See **Figure 3-27** and **Table 3-25**

The PS/2 ports are for connecting a PS/2 mouse and a PS/2 keyboard.

Pin	Description	Pin	Description
1	Keyboard Data	7	Mouse Data
2	NC	8	NC
3	GND	9	GND
4	VCC	10	VCC
5	Keyboard Clock	11	Mouse Clock
6	NC	12	NC

**Table 3-25: PS/2 Connector Pinouts**

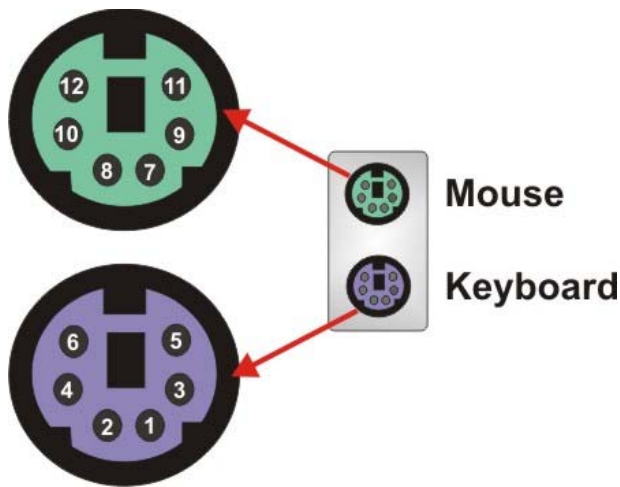

**Figure 3-27: PS/2 Pinouts**

## IMB-H810-i2 microATX Motherboard

### 3.3.3 Ethernet and USB 2.0 Connectors

- CN Label:** LAN2\_USB2
- CN Type:** RJ-45, USB 3.0
- CN Location:** See **Figure 3-25**
- CN Pinouts:** See **Table 3-26** and **Table 3-27**

The USB 2.0 connector can be connected to a USB device.


PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	5	VCC
2	USB_DATA-	6	USB_DATA-
3	USB_DATA+	7	USB_DATA+
4	GND	8	GND

**Table 3-26: USB 2.0 Port Pinouts**

A 10/100/1000 Mb/s connection can be made to a Local Area Network. LAN2 also supports IPMI 2.0.

PIN	DESCRIPTION	PIN	DESCRIPTION
P2	TRD2P0	P6	TRD2P2
P3	TRD2N0	P7	TRD2N2
P4	TRD2P1	P8	TRD2P3
P5	TRD2N1	P9	TRD2N3

**Table 3-27: LAN2 Pinouts**



**Figure 3-28: Ethernet Connector**

LED	Description	LED	Description
A	on: linked blinking: data is being sent/received	B	off: 10 Mb/s green: 100 Mb/s orange: 1000 Mb/s

**Table 3-28: Connector LEDs**

### 3.3.4 Ethernet and USB 3.0 Connectors

**CN Label:** LAN1\_USB1

**CN Type:** RJ-45, USB 3.0

**CN Location:** See **Figure 3-25**

**CN Pinouts:** See **Table 3-29** and **Table 3-30**

There are two external USB 3.0 connectors on the IMB-H810-i2.

PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	10	VCC
2	USB_DATA-	11	USB_DATA-
3	USB_DATA+	12	USB_DATA+
4	GND	13	GND
5	USB3_RX-	14	USB3_RX-
6	USB3_RX+	15	USB3_RX+
7	GND	16	GND
8	USB3_TX-	17	USB3_TX-
9	USB3_TX+	18	USB3_TX+

**Table 3-29: USB 3.0 Port Pinouts**

A 10/100/1000 Mb/s connection can be made to a Local Area Network.

PIN	DESCRIPTION	PIN	DESCRIPTION
20	LAN1_MDI0P	24	LAN1_MDI2P
21	LAN1_MDI0N	25	LAN1_MDI2N

## IMB-H810-i2 microATX Motherboard

PIN	DESCRIPTION	PIN	DESCRIPTION
22	LAN1_MDI1P	26	LAN1_MDI3P
23	LAN1_MDI1N	27	LAN1_MDI3N

**Table 3-30: LAN1 Pinouts**

### 3.3.5 Serial Port Connectors (COM1, COM2)

**CN Label:** COM1, COM2

**CN Type:** DB-9 connector

**CN Location:** See **Figure 3-25**

**CN Pinouts:** See **Table 3-31, Table 3-32**

The serial port connects to a RS-232 serial communications device.


PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD1	6	DSR1
2	RXD1	7	RTS1
3	TXD1	8	CTS1
4	DTR1	9	RI1
5	GND1		

**Table 3-31: COM1 Serial Port Connector Pinouts**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD2	6	DSR2
2	RXD2	7	RTS2
3	TXD2	8	CTS2
4	DTR2	9	RI2
5	GND2		

**Table 3-32: COM2 Serial Port Connector Pinouts**





**Figure 3-29: Serial Port Connector Pinouts**

### 3.3.6 VGA Connectors

- CN Label:** VGA1, VGA2
- CN Type:** 15-pin Female
- CN Location:** See **Figure 3-25**
- CN Pinouts:** See **Table 3-33** and **Figure 3-30**

Both VGA connectors can be connected to monitors that accept standard VGA input for easy dual display setup. The VGA connectors support up to 1920 x 1200 resolutions.

PIN	DESCRIPTION	PIN	DESCRIPTION
V1	RED	V2	GREEN
V3	BLUE	V4	NC
V5	GND	V6	GND
V7	GND	V8	GND
V9	VCC	V10	GND
V11	NC	V12	DDCDA
V13	HSYNC	V14	VSYNC
V15	DDCCLK		

**Table 3-33: VGA Connector Pinouts**

## IMB-H810-i2 microATX Motherboard




Figure 3-30: VGA Connector

Chapter

4

# Installation

---

## IMB-H810-i2 microATX Motherboard

### 4.1 Anti-static Precautions

---



#### **WARNING:**

Failure to take ESD precautions during the installation of the IMB-H810-i2 may result in permanent damage to the IMB-H810-i2 and severe injury to the user.

---

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the IMB-H810-i2. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the IMB-H810-i2 or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:***- Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the IMB-H810-i2, place it on an anti-static pad. This reduces the possibility of ESD damaging the IMB-H810-i2.
- ***Only handle the edges of the PCB:-:*** When handling the PCB, hold the PCB by the edges.

### 4.2 Installation Considerations

---



#### **NOTE:**

The following installation notices and installation considerations should be read and understood before installation. All installation notices must be strictly adhered to. Failing to adhere to these precautions may lead to severe damage and injury to the person performing the installation.

---

**WARNING:**

The installation instructions described in this manual should be carefully followed in order to prevent damage to the components and injury to the user.

Before and during the installation please **DO** the following:

- Read the user manual:
  - The user manual provides a complete description of the IMB-H810-i2 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
  - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the IMB-H810-i2 on an antistatic pad:
  - When installing or configuring the motherboard, place it on an antistatic pad. This helps to prevent potential ESD damage.
- Turn all power to the IMB-H810-i2 off:
  - When working with the IMB-H810-i2, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the IMB-H810-i2 **DO NOT**:

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.



## IMB-H810-i2 microATX Motherboard

### 4.2.1 Socket LGA1150 CPU Installation




#### **WARNING:**

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.


To install the CPU, follow the steps below.

**Step 1:** **Disengage the load lever** by pressing the lever down and slightly outward to clear the retention tab. Fully open the lever. See **Figure 4-1**.

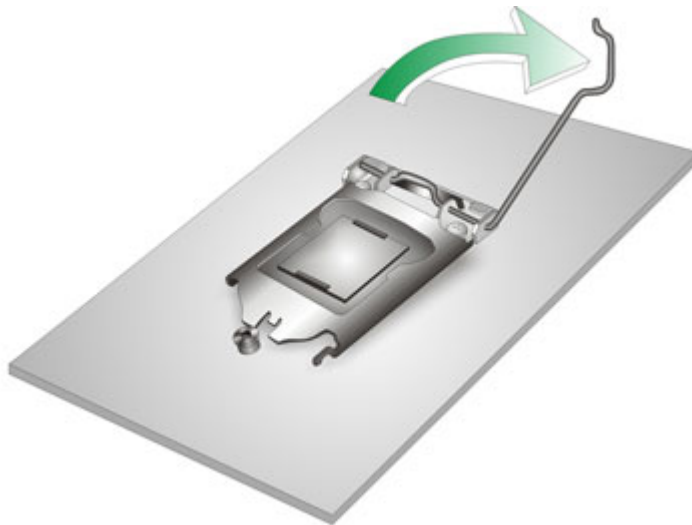

**Figure 4-1: Disengage the CPU Socket Load Lever**

**Step 2:** **Open the socket and remove the protective cover.** The black protective cover can be removed by pulling up on the tab labeled "Remove". See **Figure 4-2**.

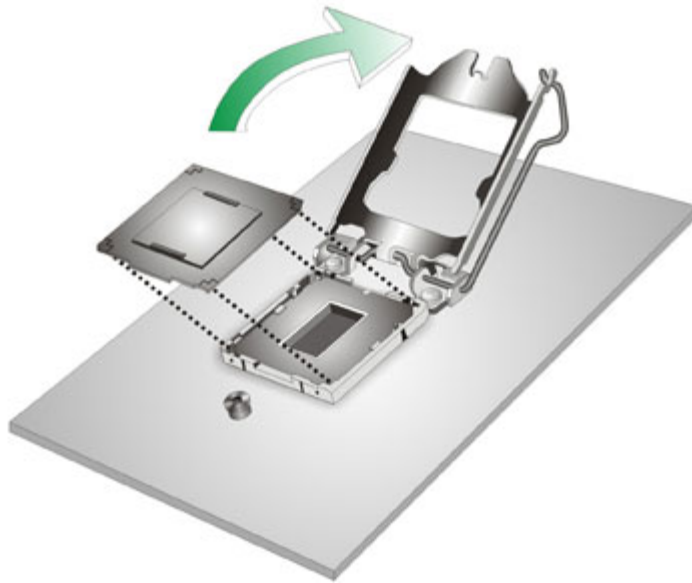

**Figure 4-2: Remove Protective Cover**

**Step 3:** **Inspect the CPU socket.** Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.

**Step 4:** **Orientate the CPU properly.** The contact array should be facing the CPU socket.



**WARNING:**

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.


---

**Step 5:** **Correctly position the CPU.** Match the Pin 1 mark with the cut edge on the CPU socket.

## IMB-H810-i2 microATX Motherboard


**Step 6: Align the CPU pins.** Locate pin 1 and the two orientation notches on the CPU. Carefully match the two orientation notches on the CPU with the socket alignment keys.

**Step 7: Insert the CPU.** Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly. See **Figure 4-3**.

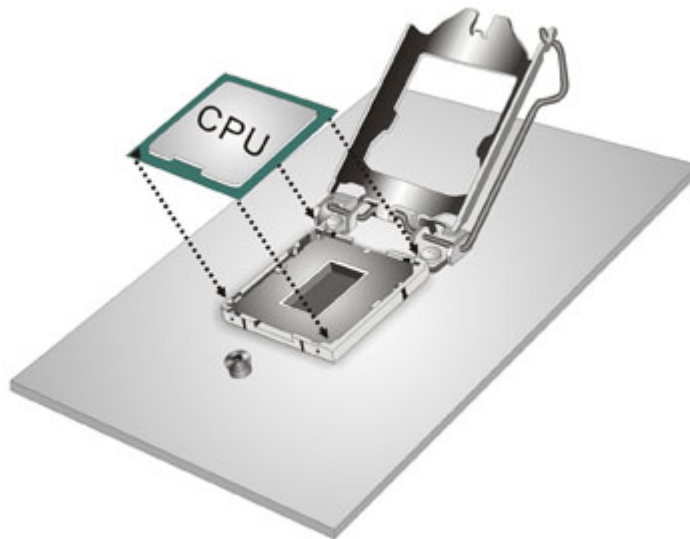

**Figure 4-3: Insert the Socket LGA1150 CPU**

**Step 8: Close the CPU socket.** Close the load plate and pull the load lever back a little to have the load plate be able to secure to the knob. Engage the load lever by pushing it back to its original position (**Figure 4-4**). There will be some resistance, but will not require extreme pressure.

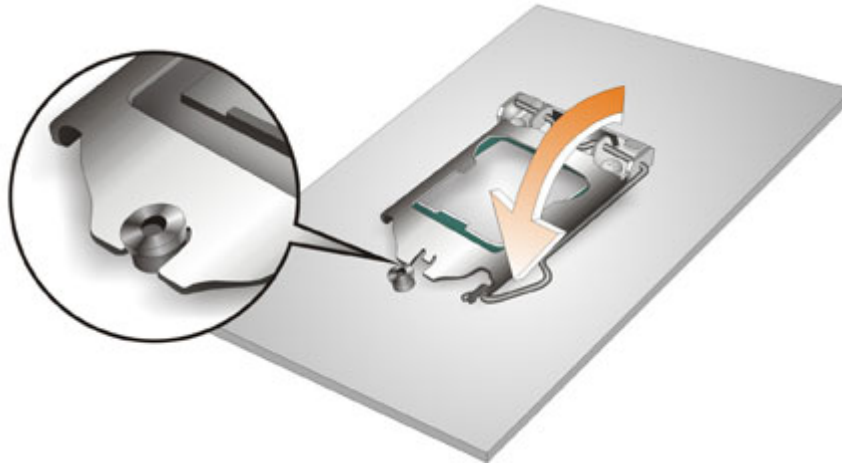

**Figure 4-4: Close the Socket LGA1150**

**Step 9:** Connect the 12 V power to the board. Connect the 12 V power from the power supply to the board.

#### **4.2.2 Socket LGA1150 Cooling Kit Installation**



**WARNING:**

**DO NOT** attempt to install a push-pin cooling fan.

The pre-installed support bracket prevents the board from bending and is **ONLY** compatible with captive screw type cooling fans.



**Figure 4-5: Cooling Kits (CF-1156A-RS and CF-1156E-RS)**

The cooling kit can be bought from IEI. The cooling kit has a heatsink and fan.



## IMB-H810-i2 microATX Motherboard




### WARNING:

Do not wipe off (accidentally or otherwise) the pre-sprayed layer of thermal paste on the bottom of the heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.

To install the cooling kit, follow the instructions below.

**Step 1:** A cooling kit bracket is pre-installed on the rear of the motherboard. See **Figure 4-6**.

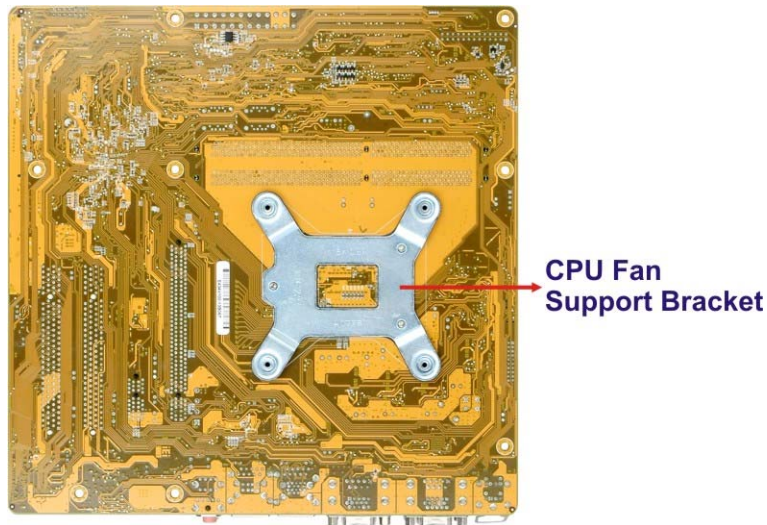

**Figure 4-6: Cooling Kit Support Bracket**

**Step 2:** Place the cooling kit onto the socket LGA1150 CPU. Make sure the CPU cable can be properly routed when the cooling kit is installed.

**Step 3:** Mount the cooling kit. Gently place the cooling kit on top of the CPU. Make sure the four threaded screws on the corners of the cooling kit properly pass through the holes of the cooling kit bracket.


**Step 4:** Secure the cooling kit by fastening the four retention screws of the cooling kit.



**Step 5: Connect the fan cable.** Connect the cooling kit fan cable to the fan connector on the IMB-H810-i2. Carefully route the cable and avoid heat generating chips and fan blades.

### 4.2.3 DIMM Installation

To install a DIMM, please follow the steps below and refer to **Figure 4-7**.

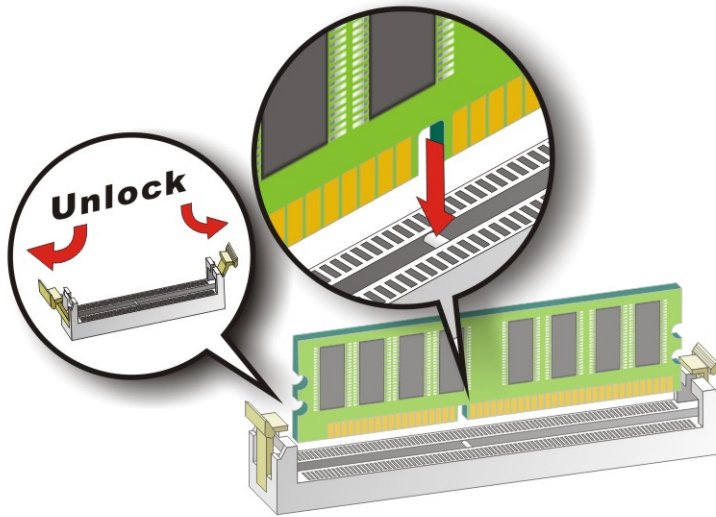

**Figure 4-7: DIMM Installation**

- Step 1: Open the DIMM socket handles.** Open the two handles outwards as far as they can. See **Figure 4-7**.
- Step 2: Align the DIMM with the socket.** Align the DIMM so the notch on the memory lines up with the notch on the memory socket. See **Figure 4-7**.
- Step 3: Insert the DIMM.** Once aligned, press down until the DIMM is properly seated. Clip the two handles into place. See **Figure 4-7**.
- Step 4: Removing a DIMM.** To remove a DIMM, push both handles outward. The memory module is ejected by a mechanism in the socket.

## IMB-H810-i2 microATX Motherboard


### 4.2.4 iRIS-2400 Module Installation



#### WARNING:

The iRIS module slot is designed to install the IEI iRIS-2400 IPMI 2.0 module only. DO NOT install other modules into the iRIS module slot. Doing so may cause damage to the IMB-H810-i2.

To install the iRIS-2400 module, please follow the steps below and refer to **Figure 4-8**.

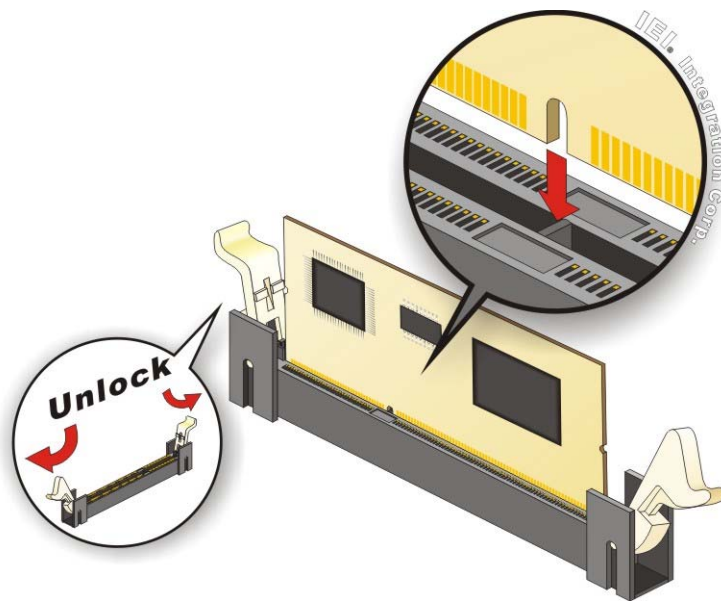

**Figure 4-8: iRIS-2400 Module Installation**

- Step 1:** Locate the iRIS module slot. See **Figure 3-10**.
- Step 2:** Open the socket handles. Open the two handles outwards as far as they can. See **Figure 4-8**.
- Step 3:** Align the iRIS-2400 module with the socket. Align the iRIS-2400 module so the notch on the module lines up with the notch on the socket. See **Figure 4-8**.
- Step 4:** Insert the iRIS-2400 module. Once aligned, press down until the iRIS-2400 module is properly seated. Clip the two handles into place. See **Figure 4-8**.

**Step 5: Removing the iRIS-2400 module.** To remove the iRIS-2400 module, push both handles outward. The module is ejected by a mechanism in the socket.

**NOTE:**


After installing the iRIS-2400 module, use **LAN2** port to establish a network connection. Please refer to **Section 4.6** for IPMI setup procedures.

## 4.3 System Configuration

The system configuration is controlled by buttons, switches and BIOS options. The system configuration must be performed before installation.

### 4.3.1 AT/ATX Power Mode Setting

The AT and ATX power mode selection is made through the AT/ATX power mode switch which is shown in **Figure 4-9**.

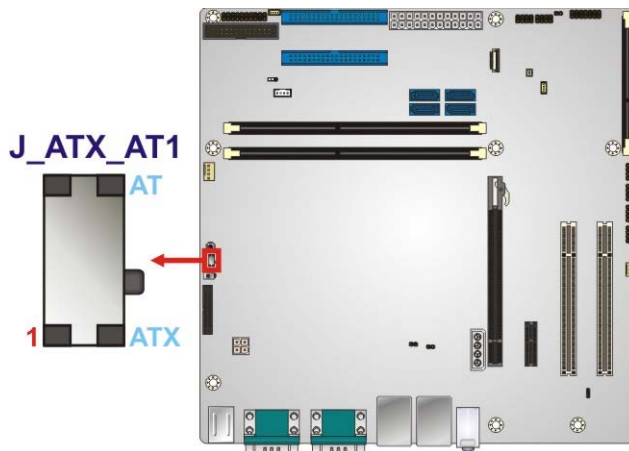


**Figure 4-9: AT/ATX Power Mode Switch Location**

## IMB-H810-i2 microATX Motherboard

### 4.3.2 Clear CMOS Button

To reset the BIOS, remove the on-board battery and press the clear CMOS button for three seconds or more. The clear CMOS button location is shown in **Figure 4-10**.

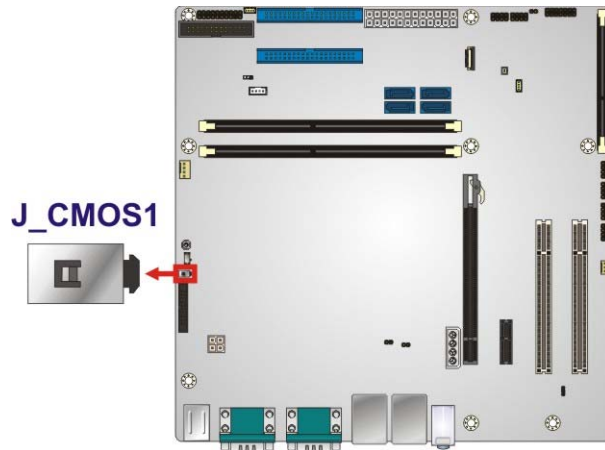

**Figure 4-10: Clear CMOS Button Location**


### 4.3.3 COM 10 Function Select

The COM 10 Function Select jumper sets the communication protocol used by the COM 10 port as RS-232, RS-422 or RS-485. The COM 10 Function Select settings are shown in **Table 4-1**.

Setting	Description
Short 1-2	RS-232 (Default)
Short 2-3	RS-422 or RS-485

**Table 4-1: COM 10 Function Select Jumper Settings**



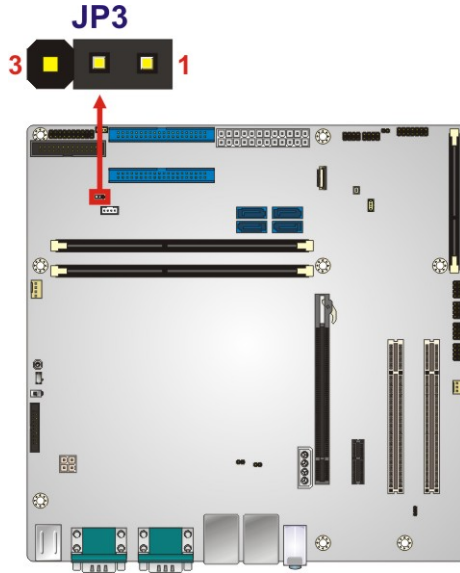

**Figure 4-11: COM 10 Function Select Jumper Location**

#### **4.3.4 Flash Descriptor Security Override**

The Flash Descriptor Security Override jumper specifies whether to override the flash descriptor.

<b>Setting</b>	<b>Description</b>
Short 1-2	No override (Default)
Short 2-3	Override

**Table 4-2: Flash Descriptor Security Override Jumper Settings**



## IMB-H810-i2 microATX Motherboard

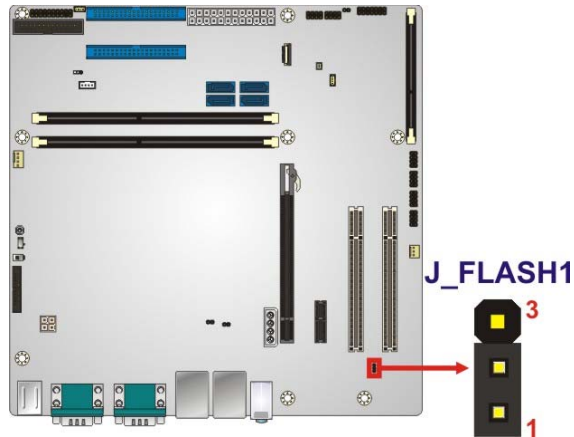


Figure 4-12: Flash Descriptor Security Override Jumper Location

### 4.3.5 PCIe x16 Interface Setup

The PCIe x16 interface setup is made through the BIOS options in “Chipset → PCH-IO Configuration” BIOS menu. Use the **PCIEX16 Power** option to configure the PCIe x16 channel mode.

BIOS Options	Description
1 x16 PCIE	Sets the PCIe x16 slot as one PCIe x16. (Default)

Table 4-3: PCIe x16 Interface Setup

Please refer to **Section 5.4.1** for detailed information.

### 4.3.6 USB Power Select

The USB power selection is made through the BIOS options in “Chipset → PCH-IO Configuration” BIOS menu. Use the **USB SW1 Power** and the **USB SW2 Power** BIOS options to configure the power source to the corresponding USB ports (see **Table 4-4**).

BIOS Options	Configured USB Ports
USB SW1 Power	LAN1_USB1 (external USB 3.0 ports) LAN2_USB2 (external USB 2.0 ports)
USB SW2 Power	USB3, USB4, USB5, USB6 (internal USB 2.0 ports)

Table 4-4: BIOS Options and Configured USB Ports

Please refer to **Section 5.4.1** for detailed information.

## 4.4 Internal Peripheral Device Connections


This section outlines the installation of peripheral devices to the onboard connectors.

### 4.4.1 SATA Drive Connection

The IMB-H810-i2 is shipped with two SATA drive cables. To connect the SATA drives to the connectors, please follow the steps below.

**Step 1: Locate the connectors.** The locations of the SATA drive connectors are shown in **Chapter 3**.

**Step 2: Insert the cable connector.** Insert the cable connector into the on-board SATA drive connector. See **Figure 4-13**.

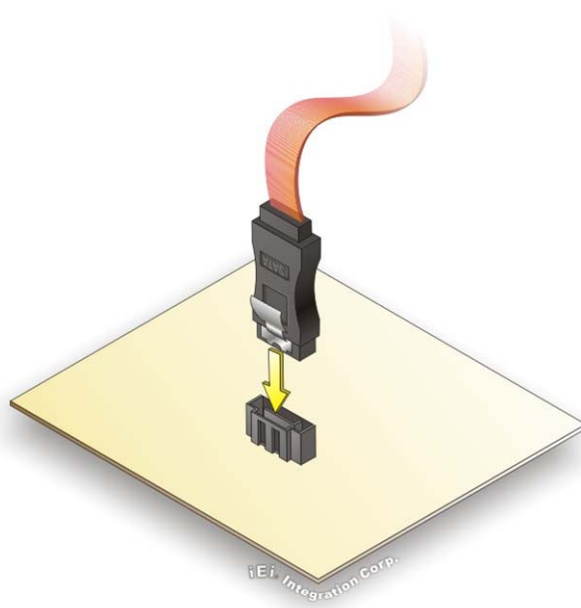


**Figure 4-13: SATA Drive Cable Connection**

**Step 3: Connect the cable to the SATA disk.** Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 4-14**.

## IMB-H810-i2 microATX Motherboard

**Step 4:** Connect the **SATA power cable (optional)**. Connect the SATA power connector to the back of the SATA drive. See **Figure 4-14**.

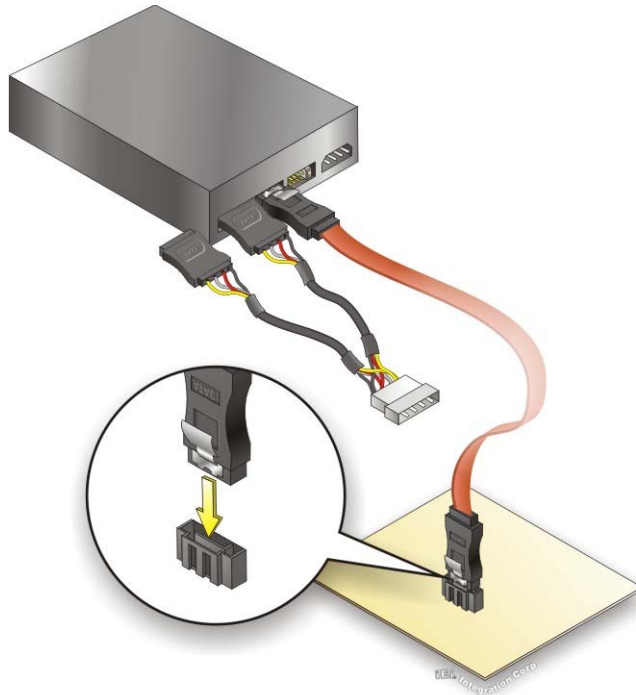

**Figure 4-14: SATA Power Drive Connection**

The SATA power cable can be bought from IEI. See Optional Items in Section 2.4.

## 4.5 External Peripheral Interface Connection

This section describes connecting devices to the external connectors on the IMB-H810-i2.

### 4.5.1 Audio Connector

The audio jacks on the external audio connector enable the IMB-H810-i2 to be connected to a stereo sound setup. Each jack supports both input and output. When connecting a device, the High Definition Audio utility will automatically detect input or output. The lime green (top) audio jack does not support input from a microphone. To install the audio devices, follow the steps below.

**Step 1:** **Identify the audio plugs.** The plugs on your home theater system or speakers may not match the colors on the rear panel.

**Step 2:** Plug the audio plugs into the audio jacks. Plug the audio plugs into the audio jacks. If the plugs on your speakers are different, an adapter will need to be used to plug them into the audio jacks.

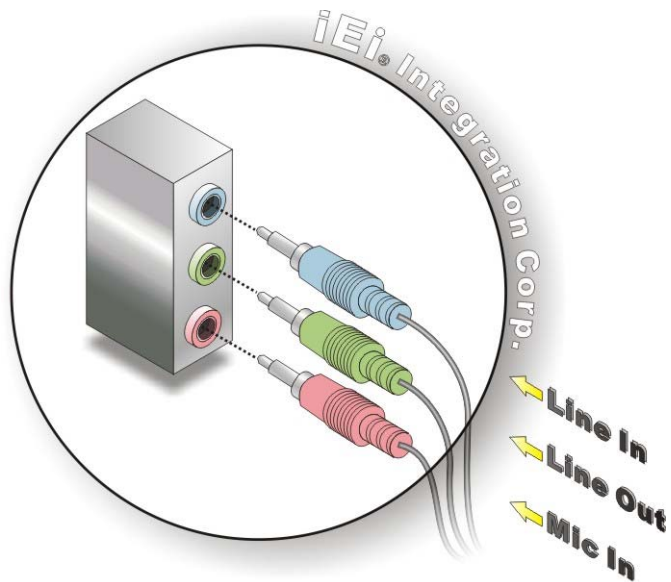


Figure 4-15: Audio Connector

**Step 3:** Check audio clarity. Check that the sound is coming through the right speakers by adjusting the balance front to rear and left to right.

#### 4.5.2 LAN Connection

There are two external RJ-45 LAN connectors. The RJ-45 connectors enable connection to an external network. To connect a LAN cable with an RJ-45 connector, please follow the instructions below.

**Step 1:** Locate the RJ-45 connectors. The locations of the USB connectors are shown in Chapter 3.

**Step 2:** Align the connectors. Align the RJ-45 connector on the LAN cable with one of the RJ-45 connectors on the IMB-H810-i2. See Figure 4-16.



## IMB-H810-i2 microATX Motherboard

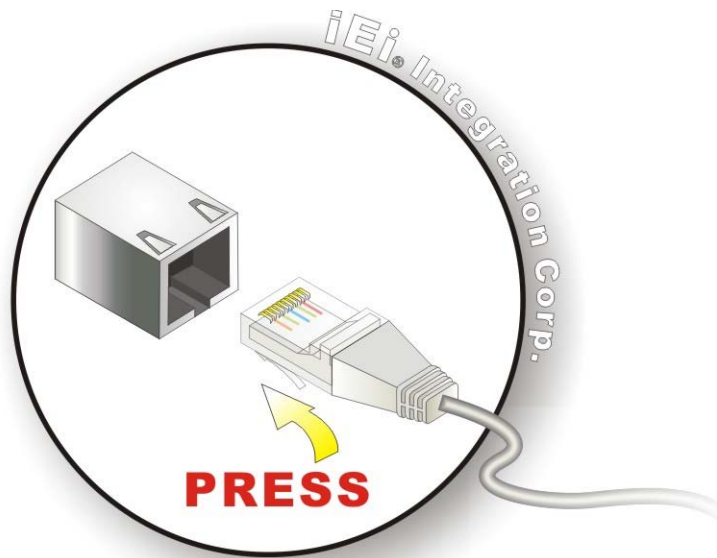


Figure 4-16: LAN Connection

**Step 3:** Insert the LAN cable RJ-45 connector. Once aligned, gently insert the LAN cable RJ-45 connector into the on-board RJ-45 connector.


### 4.5.3 PS/2 Keyboard and Mouse Connection

The IMB-H810-i2 has a dual PS/2 connector on the external peripheral interface panel. The dual PS/2 connector is used to connect to a keyboard and mouse to the system. Follow the steps below to connect a keyboard and mouse to the IMB-H810-i2.

**Step 1:** Locate the dual PS/2 connector. The location of the dual PS/2 connector is shown in **Chapter 3**.

**Step 2:** Insert the keyboard/mouse connector. Insert a PS/2 keyboard or mouse connector into the appropriate PS/2 connector on the external peripheral interface connector. See Figure 4-17.



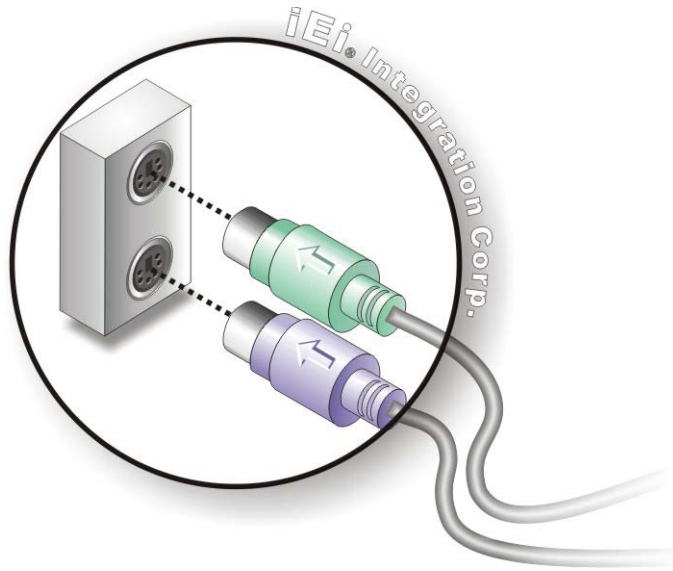

**Figure 4-17: PS/2 Keyboard/Mouse Connector**

#### **4.5.4 Serial Device Connection**

The IMB-H810-i2 has two single male DB-9 connectors on the external peripheral interface panel for a serial device. Follow the steps below to connect a serial device to the IMB-H810-i2.

**Step 1:** **Locate the DB-9 connector.** The location of the DB-9 connector is shown in **Chapter 3**.

**Step 2:** **Insert the serial connector.** Insert the DB-9 connector of a serial device into the DB-9 connector on the external peripheral interface. See **Figure 4-18**.

## IMB-H810-i2 microATX Motherboard

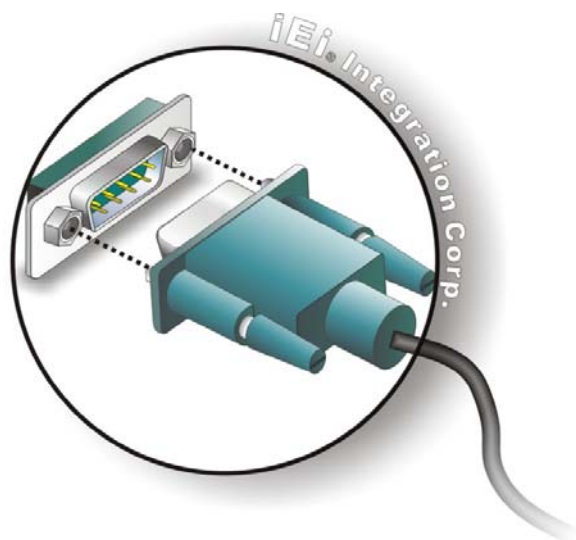


Figure 4-18: Serial Device Connector


**Step 3:** **Secure the connector.** Secure the serial device connector to the external interface by tightening the two retention screws on either side of the connector.

#### 4.5.5 USB Connection (Dual Connector)

The external USB Series "A" receptacle connectors provide easier and quicker access to external USB devices. Follow the steps below to connect USB devices to the IMB-H810-i2.

**Step 1:** **Locate the USB Series "A" receptacle connectors.** The location of the USB Series "A" receptacle connectors are shown in **Chapter 3**.

**Step 2:** **Insert a USB Series "A" plug.** Insert the USB Series "A" plug of a device into the USB Series "A" receptacle on the external peripheral interface. See **Figure 4-19**.

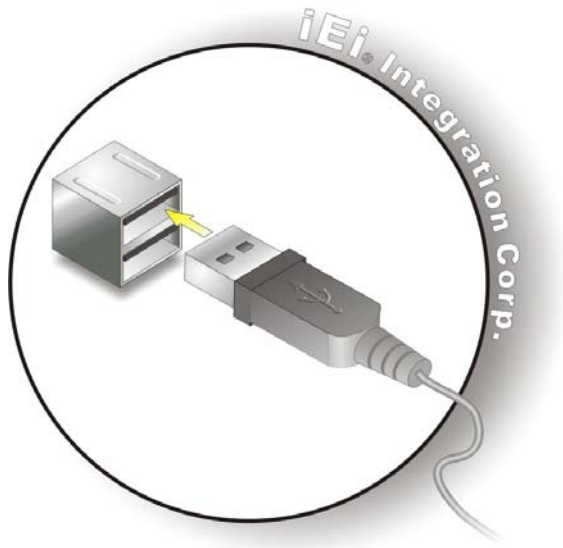


**Figure 4-19: USB Connector**

#### **4.5.6 VGA Monitor Connection**

The IMB-H810-i2 has two single female DB-15 connectors on the external peripheral interface panel. The DB-15 connector is connected to a CRT or VGA monitor. To connect a monitor to the IMB-H810-i2, please follow the instructions below.

- Step 1:** **Locate the female DB-15 connector.** The location of the female DB-15 connector is shown in **Chapter 3**.
- Step 2:** **Align the VGA connector.** Align the male DB-15 connector on the VGA screen cable with the female DB-15 connector on the external peripheral interface.
- Step 3:** **Insert the VGA connector** Once the connectors are properly aligned with the insert the male connector from the VGA screen into the female connector on the IMB-H810-i2. See **Figure 4-20**.

## IMB-H810-i2 microATX Motherboard

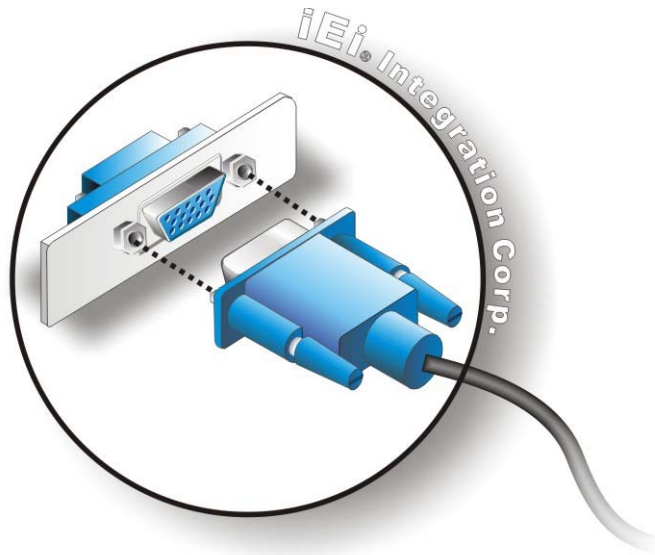

**Figure 4-20: VGA Connector**

**Step 4:** **Secure the connector.** Secure the DB-15 VGA connector from the VGA monitor to the external interface by tightening the two retention screws on either side of the connector.

## 4.6 IPMI Setup Procedure

The IMB-H810-i2 features Intelligent Platform Management Interface (IPMI) that helps lower the overall costs of server management by enabling users to maximize IT resources, save time and manage multiple systems. The IMB-H810-i2 supports IPMI 2.0 through the optional iRIS-2400 module. Follow the steps below to setup IPMI.

### 4.6.1 Managed System Hardware Setup

The hardware configuration of the managed system (IMB-H810-i2) is described below.

**Step 1:** Install an iRIS-2400 module to the IPMI module socket (refer to **Section 4.2.4**).

**Step 2:** Make sure at least one DDR3 DIMM is installed in one of the DIMM sockets. If multiple DIMMs are installed, all of the DIMMs must be same size, same speed and same brand to get the best performance.

**Step 3:** Connect an Ethernet cable to the RJ-45 connector labeled **LAN2\_USB2** (Figure 3-25).

#### 4.6.2 Using the IEI iMAN Web GUI

To manage a client system from a remote console using IEI iMAN Web GUI, follow the steps below.

**Step 1:** Obtain the IP address of the managed system. It is recommended to use the IPMI Tool on the managed system to obtain the IP address. To use IPMI Tool to obtain IP address, follow the steps below:

- a. Copy the **ipmitool.exe** file to a bootable USB flash drive.
- b. Insert the USB flash drive to the IMB-H810-i2
- c. The IMB-H810-i2 boots from the USB flash drive
- d. Enter the following command: **ipmitool 20 30 02 01 03 00 00**  
(there is a space between each two-digit number)
- e. A serial of number shows. The last four two-digit hexadecimal numbers are the IP address. Convert the hexadecimal numbers to decimal numbers.

**Step 2:** On the remote management console, open a web browser. Enter the managed system IP address in the web browser (Figure 4-21).




Figure 4-21: IEI iMAN Web Address

**Step 3:** The login page appears in the web browser.

**Step 4:** Enter the user name and password to login the system. The default login username and password are:




## IMB-H810-i2 microATX Motherboard

-Username: **admin**

-Password: **admin**

**Step 5:** Press the login button to login the system.

**Step 6:** The IEI iMAN Web GUI appears (**Figure 4-22**).

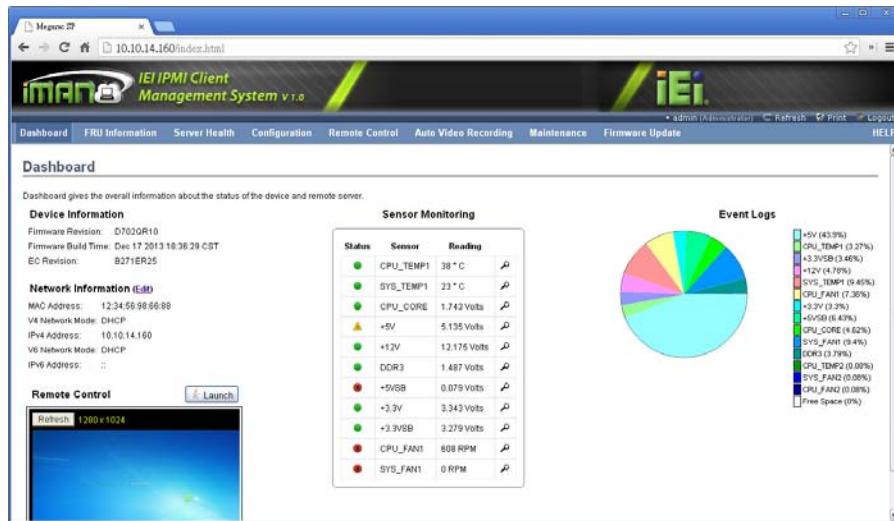

**Figure 4-22: IEI iMAN Web GUI**



### NOTE:

To understand how to use the IEI iMAN Web GUI, please refer to the iRIS-2400 Web GUI user manual in the utility CD came with the IMB-H810-i2. The user manual describes each function in detail.

Chapter

**5**

**BIOS**

---

## IMB-H810-i2 microATX Motherboard

### 5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.



#### NOTE:

Some of the BIOS options may vary throughout the life cycle of the product and are subject to change without prior notice.

---

#### 5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

#### 5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **ESC** to quit. Navigation keys are shown in **Table 5-1**.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes

Key	Function
-	Decrease the numeric value or make changes
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 key	Load previous values
F3 key	Load optimized defaults
F4 key	Save changes and Exit BIOS

**Table 5-1: BIOS Navigation Keys**

### 5.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

### 5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the clear CMOS button described in **Chapter 4**.

### 5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Boot – Changes the system boot configuration.
- Security – Sets User and Supervisor Passwords.
- Save & Exit – Selects exit options and loads default settings

## IMB-H810-i2 microATX Motherboard

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

### 5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered. The **Main** menu gives an overview of the basic system information.





## IMB-H810-i2 microATX Motherboard

### → System Date [xx/xx/xx]

Use the **System Date** option to set the system date. Manually enter the day, month and year.

### → System Time [xx:xx:xx]

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

## 5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



### WARNING!

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit
-----
> ACPI Settings
> RTC Wake Settings
> Trusted Computing
> CPU Configuration
> SATA Configuration
> USB Configuration
> F81866 Super IO Configuration
> F81866 H/W Monitor
> F81216 Secondary Super IO Configuration
> Serial Port Console Redirection
> iEi Feature


System ACPI Parameters
-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ - Change Opt.
F1 General Help
F2 Previous Values
F3 Optimized Defaults
F4 Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
    
```

### BIOS Menu 2: Advanced

### 5.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

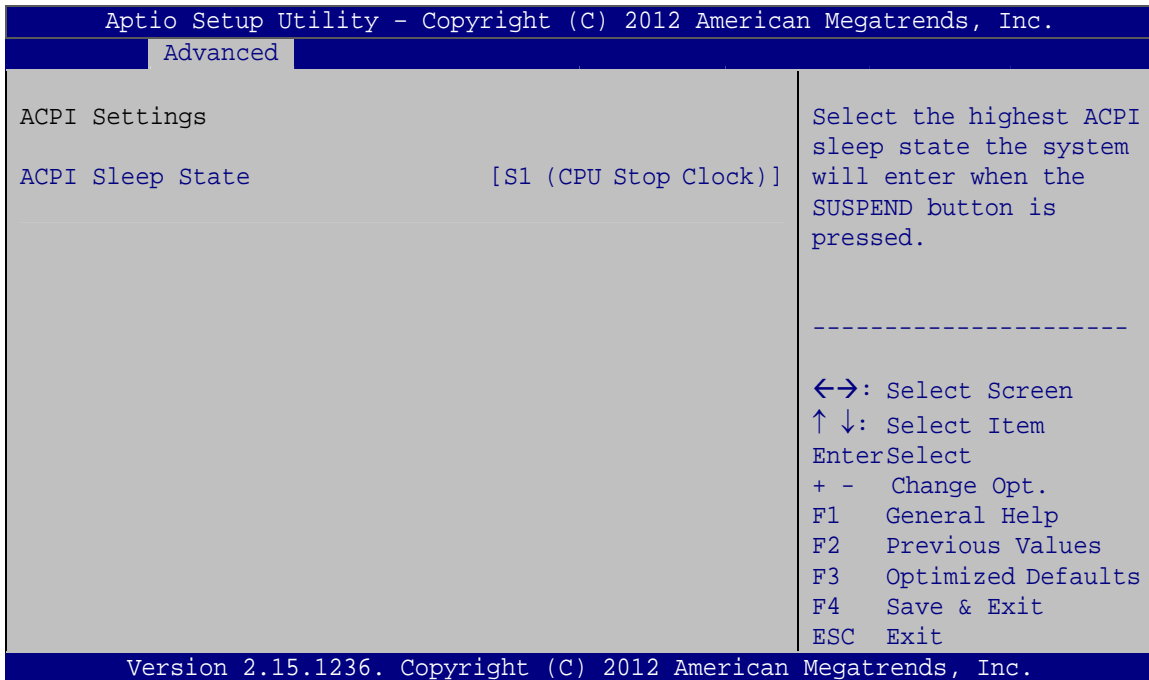

#### BIOS Menu 3: ACPI Configuration

##### → ACPI Sleep State [S1 (CPU Stop Clock)]

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- **Suspend Disabled**
- **S1 (CPU Stop Clock)** **DEFAULT** The system enters S1(POS) sleep state. The system appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.

## IMB-H810-i2 microATX Motherboard

➔ **S3 (Suspend to RAM)**

The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

### 5.3.2 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 4**) configures RTC wake event. The RTC wake function is supported in ACPI (S3/S4/S5) and APM soft off modes.



#### BIOS Menu 4: RTC Wake Settings

➔ **Wake System with Fixed Time [Disabled]**

Use the **Wake System with Fixed Time** option to specify the time the system should be roused from a suspended state.

➔ **Disabled**      **DEFAULT**

The real time clock (RTC) cannot generate a wake event

➔ **Enabled**


If selected, the following appears with values that can be selected:

- \*Wake up every day
- \*Wake up date
- \*Wake up hour
- \*Wake up minute
- \*Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

### 5.3.3 Trusted Computing

Use the **Trusted Computing** menu (**BIOS Menu 5**) to configure settings related to the Trusted Computing Group (TCG) Trusted Platform Module (TPM).

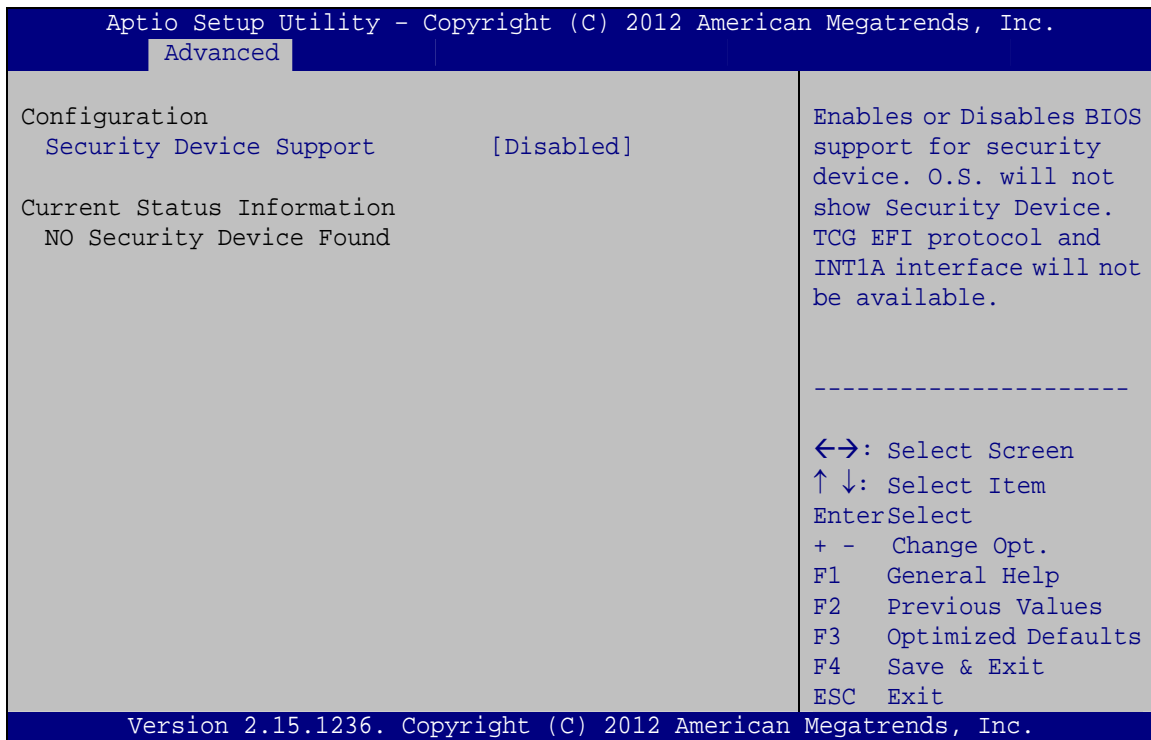

**BIOS Menu 5: Trusted Computing**



## IMB-H810-i2 microATX Motherboard

### → Security Device Support [Disable]


Use the **Security Device Support** option to configure support for security devices.

→ **Disable** **DEFAULT** Security Device support is disabled.

→ **Enable** Security Device support is enabled.

### 5.3.4 CPU Information

Use the **CPU Information** submenu (**BIOS Menu 6**) to view detailed CPU specifications and configure the CPU.

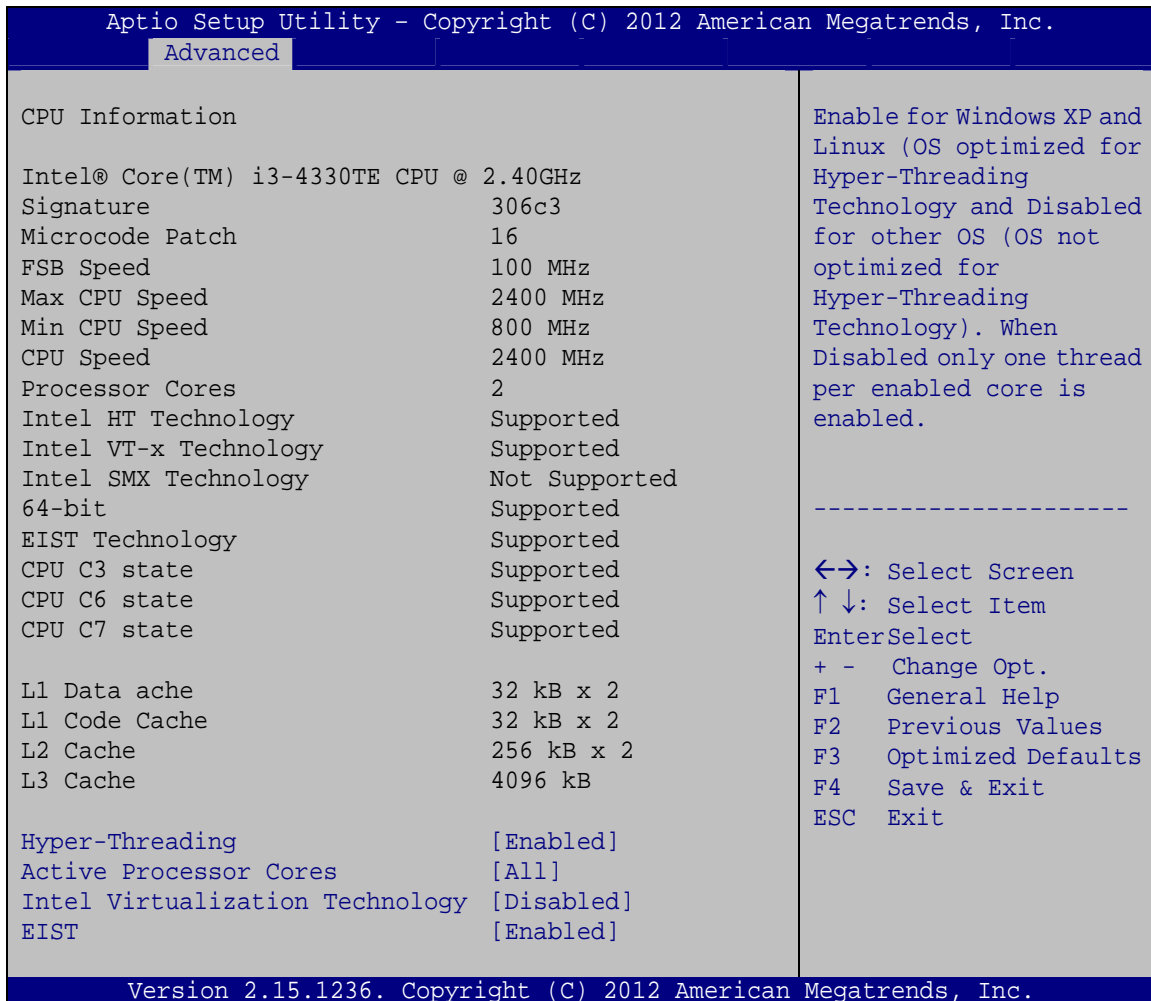

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.

Advanced

CPU Information		Enable for Windows XP and Linux (OS optimized for Hyper-Threading Technology and Disabled for other OS (OS not optimized for Hyper-Threading Technology)). When Disabled only one thread per enabled core is enabled.
Intel® Core(TM) i3-4330TE CPU @	2.40GHz	
Signature	306c3	
Microcode Patch	16	
FSB Speed	100 MHz	
Max CPU Speed	2400 MHz	
Min CPU Speed	800 MHz	
CPU Speed	2400 MHz	
Processor Cores	2	
Intel HT Technology	Supported	
Intel VT-x Technology	Supported	
Intel SMX Technology	Not Supported	
64-bit	Supported	
EIST Technology	Supported	
CPU C3 state	Supported	
CPU C6 state	Supported	
CPU C7 state	Supported	
L1 Data ache	32 kB x 2	
L1 Code Cache	32 kB x 2	
L2 Cache	256 kB x 2	
L3 Cache	4096 kB	
Hyper-Threading	[Enabled]	
Active Processor Cores	[All]	
Intel Virtualization Technology	[Disabled]	
EIST	[Enabled]	

-----

←→: Select Screen  
 ↑ ↓: Select Item  
 Enter>Select  
 + - Change Opt.  
 F1 General Help  
 F2 Previous Values  
 F3 Optimized Defaults  
 F4 Save & Exit  
 ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

### BIOS Menu 6: CPU Information

The CPU Configuration menu (**BIOS Menu 6**) lists the following CPU details:

- Processor Type: Lists the brand name of the CPU being used
- CPU Signature: Lists the CPU signature value.
- Microcode Patch: Lists the microcode patch being used.
- FSB Speed: Lists the front side bus (FSB) speed.
- Max CPU Speed: Lists the maximum CPU processing speed.
- Min CPU Speed: Lists the minimum CPU processing speed.
- CPU Speed: Lists the CPU processing speed.
- Processor Cores: Lists the number of the processor core
- Intel HT Technology: Indicates if Intel HT Technology is supported by the CPU.
- Intel VT-x Technology: Indicates if Intel VT-x Technology is supported by the CPU.
- Intel SMX Technology: Indicates if Intel SMX Technology is supported by the CPU.
- EIST Technology: Indicates if Enhanced Intel SpeedStep® Technology is supported by the CPU.
- L1 Data Cache: Lists the amount of data storage space on the L1 cache.
- L1 Code Cache: Lists the amount of code storage space on the L1 cache.
- L2 Cache: Lists the amount of storage space on the L2 cache.
- L3 Cache: Lists the amount of storage space on the L3 cache.

#### → Hyper-threading [Enabled]

Use the **Hyper-threading** BIOS option to enable or disable the Intel Hyper-Threading Technology.

- **Disabled**                      Disables the Intel Hyper-Threading Technology.
- **Enabled**    **DEFAULT**      Enables the Intel Hyper-Threading Technology.

#### → Active Processor Cores [All]

Use the **Active Processor Cores** BIOS option to enable numbers of cores in the processor package.

- **All**                      **DEFAULT**      Enable all cores in the processor package.

## IMB-H810-i2 microATX Motherboard

→ 1 Enable one core in the processor package.

### → Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

→ **Disabled**                      **DEFAULT**      Disables Intel Virtualization Technology.

→ **Enabled**    Enables Intel Virtualization Technology.

### → EIST [Enabled]


Use the **EIST** option to enable or disable Enhanced Intel SpeedStep® Technology (EIST).

→ **Disabled**    Disables Enhanced Intel SpeedStep®  
Technology.

→ **Enabled**                      **DEFAULT**      Enables Enhanced Intel SpeedStep®  
Technology.

### 5.3.5 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 7**) to change and/or set the configuration of the SATA devices installed in the system.

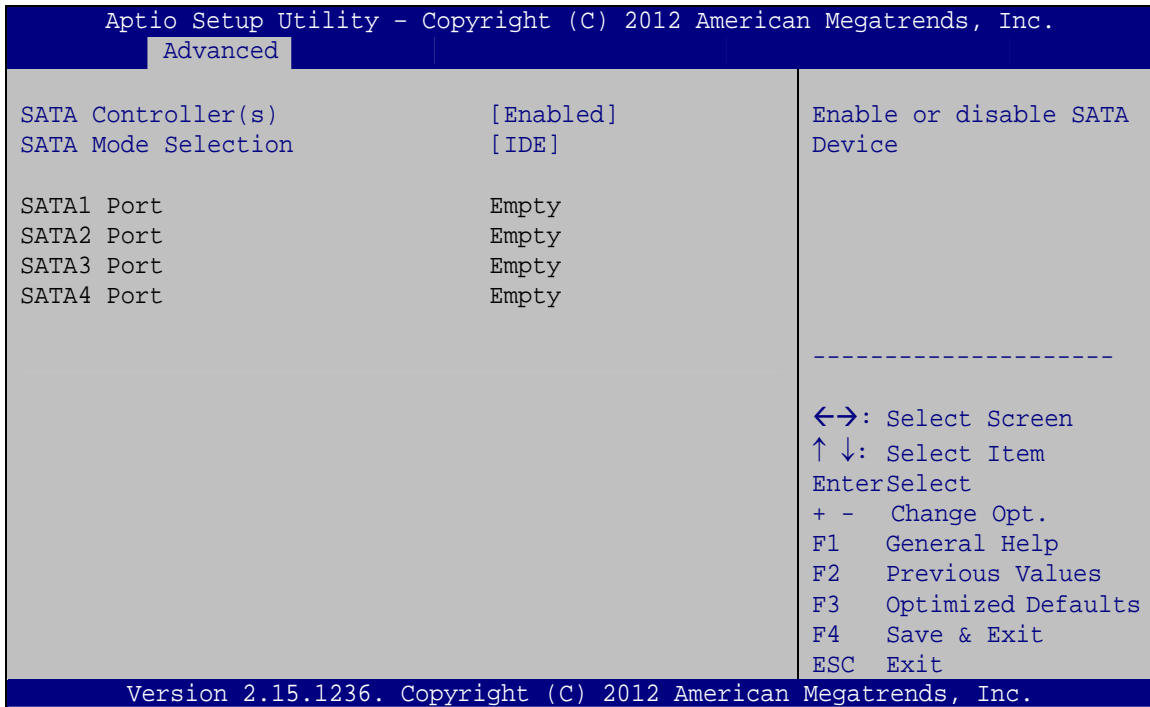

#### BIOS Menu 7: SATA Configuration

##### → SATA Controller(s) [Enabled]

Use the **SATA Controller(s)** option to enable or disable the serial ATA controller.

- **Enabled**      **DEFAULT**      Enables the on-board SATA controller.
- **Disabled**                      Disables the on-board SATA controller.

##### → SATA Mode Selection [IDE]

Use the **SATA Mode Selection** option to configure SATA devices as normal IDE devices.

- **IDE**              **DEFAULT**      Configures SATA devices as normal IDE device.
- **AHCI**                      Configures SATA devices as AHCI device.

## IMB-H810-i2 microATX Motherboard

### 5.3.6 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 8**) to read USB configuration information and configure the USB settings.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
-----
USB Configuration
USB Devices:
  1 Keyboard, 3 Hubs
Legacy USB Support          [Enabled]
-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit
-----
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

#### BIOS Menu 8: USB Configuration

##### ➔ USB Devices

The **USB Devices Enabled** field lists the USB devices that are enabled on the system

##### ➔ Legacy USB Support [Enabled]

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

➔ **Enabled**      **DEFAULT**      Legacy USB support enabled



- ➔ **Disabled** Legacy USB support disabled
- ➔ **Auto** Legacy USB support disabled if no USB devices are connected

### 5.3.7 F81866 Super IO Configuration

Use the **F81866 Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the parallel ports and serial ports.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
F81866 Super IO Configuration
F81866 Super IO Chip          F81866
> Serial Port 1 Configuration
> Serial Port 2 Configuration
> Serial Port 3 Configuration
> Serial Port 4 Configuration
> Serial Port 5 Configuration
> Serial Port 6 Configuration
> Parallel Port Configuration

Set Parameters of Serial
Port 1 (COMA)
-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit


Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

#### BIOS Menu 9: F81866 Super IO Configuration

## IMB-H810-i2 microATX Motherboard

### 5.3.7.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

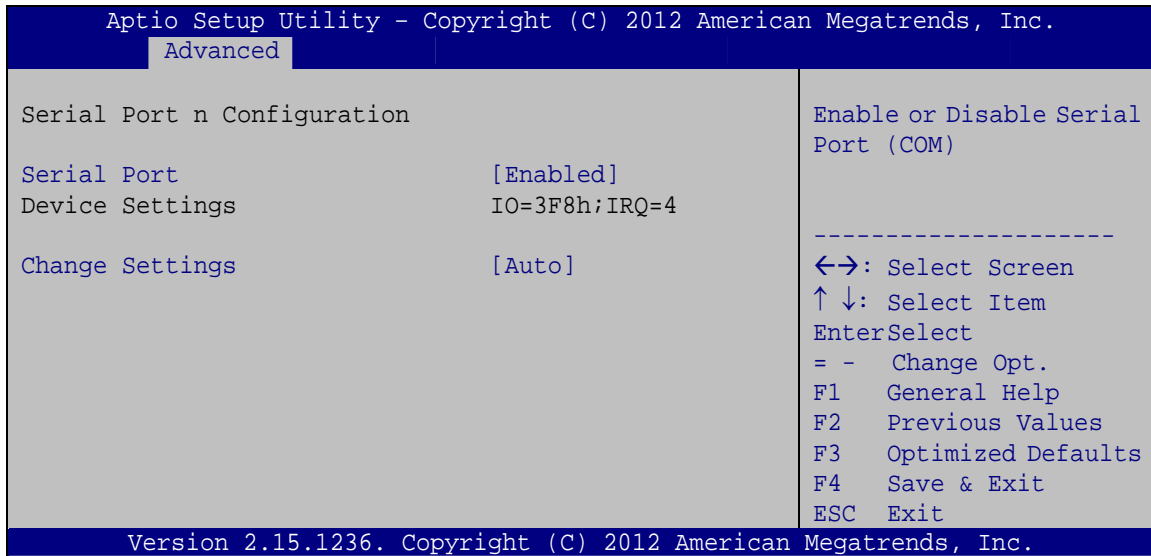

#### BIOS Menu 10: Serial Port n Configuration Menu

##### 5.3.7.1.1 Serial Port 1 Configuration

###### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**            **DEFAULT**      Enable the serial port

###### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**            **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=3F8h;**  
**IRQ=4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ4

- **IO=3F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ3,4
- **IO=2C0h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4
- **IO=2C8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4

### 5.3.7.1.2 Serial Port 2 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**                      **DEFAULT**                      Enable the serial port

#### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**                      **DEFAULT**                      The serial port IO port address and interrupt address are automatically detected.
- **IO=2F8h;**  
**IRQ=3**                      Serial Port I/O port address is 2F8h and the interrupt address is IRQ3
- **IO=3F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4
- **IO=2F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4
- **IO=2C0h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4
- **IO=2C8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4

## IMB-H810-i2 microATX Motherboard

### 5.3.7.1.3 Serial Port 3 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**      **DEFAULT**      Enable the serial port

#### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**              **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=2D0h;**  
**IRQ=10**                      Serial Port I/O port address is 2D0h and the interrupt address is IRQ10
- **IO=2D0h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- **IO=2E8h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11
- **IO=2D8h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11

### 5.3.7.1.4 Serial Port 4 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**      **DEFAULT**      Enable the serial port

### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- |   |                                |                |   |
|---|--------------------------------|----------------|---|
| → | <b>Auto</b>                    | <b>DEFAULT</b> | The serial port IO port address and interrupt address are automatically detected. |
| → | <b>IO=2E8h;<br/>IRQ=10</b>     |                | Serial Port I/O port address is 2E8h and the interrupt address is IRQ10           |
| → | <b>IO=2E8h;<br/>IRQ=10, 11</b> |                | Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11       |
| → | <b>IO=2D0h;<br/>IRQ=10, 11</b> |                | Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11       |
| → | <b>IO=2D8h;<br/>IRQ=10, 11</b> |                | Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11       |

### 5.3.7.1.5 Serial Port 5 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- |   |                 |                |                         |
|---|-----------------|----------------|-------------------------|
| → | <b>Disabled</b> |                | Disable the serial port |
| → | <b>Enabled</b>  | <b>DEFAULT</b> | Enable the serial port  |

#### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- |   |                            |                |   |
|---|----------------------------|----------------|---|
| → | <b>Auto</b>                | <b>DEFAULT</b> | The serial port IO port address and interrupt address are automatically detected. |
| → | <b>IO=2D0h;<br/>IRQ=10</b> |                | Serial Port I/O port address is 2D0h and the interrupt address is IRQ10           |



## IMB-H810-i2 microATX Motherboard

- **IO=2C0h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- **IO=2C8h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2C8h and the interrupt address is IRQ10, 11
- **IO=2D0h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- **IO=2D8h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11
- **IO=2E0h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2E0h and the interrupt address is IRQ10, 11

### 5.3.7.1.6 Serial Port 6 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled      DEFAULT**      Enable the serial port

#### → Change Settings [Auto]


Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto              DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=2D8h;**  
**IRQ=10**                      Serial Port I/O port address is 2D8h and the interrupt address is IRQ10
- **IO=2C0h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- **IO=2C8h;**  
**IRQ=10, 11**                      Serial Port I/O port address is 2C8h and the interrupt address is IRQ10, 11

- ➔ **IO=2D0h;**                      Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11  
**IRQ=10, 11**
- ➔ **IO=2D8h;**                      Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11  
**IRQ=10, 11**
- ➔ **IO=2E0h;**                      Serial Port I/O port address is 2E0h and the interrupt address is IRQ10, 11  
**IRQ=10, 11**

### 5.3.7.2 Parallel Port Configuration

Use the **Parallel Port Configuration** menu (**BIOS Menu 11**) to configure the serial port n.

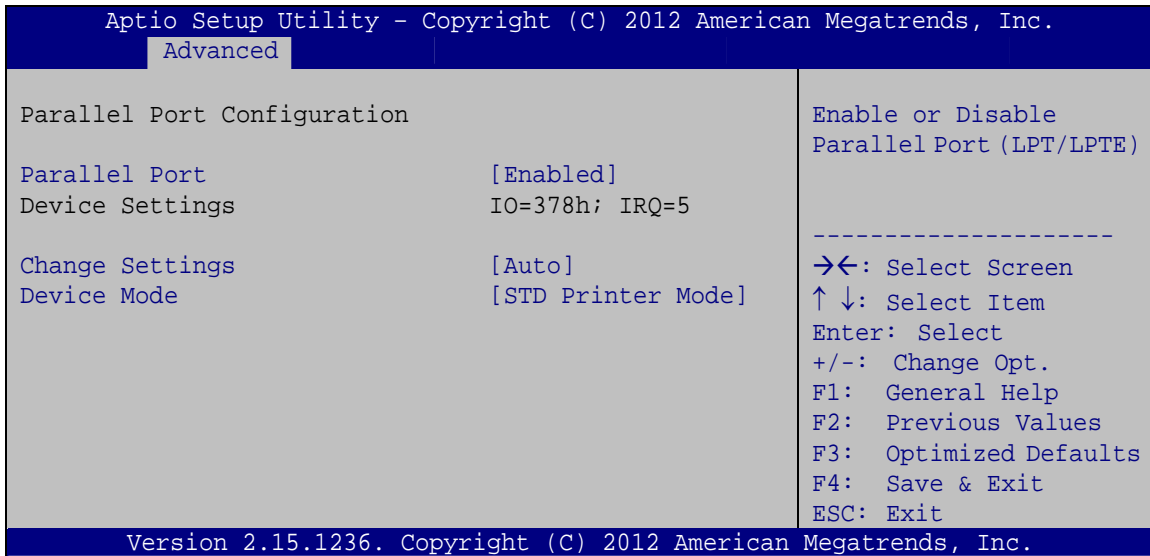

#### BIOS Menu 11: Parallel Port Configuration Menu

##### ➔ **Parallel Port [Enabled]**

Use the **Parallel Port** option to enable or disable the parallel port.

- ➔ **Disabled**                      Disable the parallel port
- ➔ **Enabled      DEFAULT**              Enable the parallel port

##### ➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the parallel port IO port address and interrupt address.

## IMB-H810-i2 microATX Motherboard

- |   |                              |                |   |
|---|------------------------------|----------------|---|
| → | <b>Auto</b>                  | <b>DEFAULT</b> | The parallel port IO port address and interrupt address are automatically detected. |
| → | <b>IO=378h;<br/>IRQ=5</b>    |                | Parallel Port I/O port address is 378h and the interrupt address is IRQ5            |
| → | <b>IO=378h;<br/>IRQ=5, 7</b> |                | Parallel Port I/O port address is 378h and the interrupt address is IRQ5, 7         |
| → | <b>IO=278h;<br/>IRQ=5, 7</b> |                | Parallel Port I/O port address is 278h and the interrupt address is IRQ5, 7         |
| → | <b>IO=3BCh;<br/>IRQ=5, 7</b> |                | Parallel Port I/O port address is 3BCh and the interrupt address is IRQ5, 7         |

### → Device Mode [STD Printer Mode]

Use the **Device Mode** option to select the mode the parallel port operates in. Configuration options are listed below.

- |   |                      |                |
|---|----------------------|----------------|
| ▪ | STD Printer Mode     | <b>Default</b> |
| ▪ | SPP Mode             |                |
| ▪ | EPP-1.9 and SPP Mode |                |
| ▪ | EPP-1.7 and SPP Mode |                |
| ▪ | ECP Mode             |                |
| ▪ | ECP and EPP 1.9 Mode |                |
| ▪ | ECP and EPP 1.7 Mode |                |

### 5.3.8 F81866 H/W Monitor

The **F81866 H/W Monitor** menu (**BIOS Menu 12**) contains the fan configuration submenus and displays operating temperature, fan speeds and system voltages.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Advanced
PC Health Status
> Smart Fan Mode Configuration
CPU Temperature      :+35 C
SYS Temperature     :+0 C
CPU_FAN1 Speed      :1821 RPM
SYS_FAN1 Speed      :N/A
V_CPU_CORE          :+1.736 V
+5V                 :+5.129 V
+12V                :+12.144 V
V_SM                :+1.520 V
VSB5V               :+4.968 V
VCC3V               :+3.344 V
VSB3V               :+3.344 V
VBAT                :+2.944 V

Smart FAN Configuration
-----
<=>: Select Screen
↑↓: Select Item
Enter>Select
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
    
```

### BIOS Menu 12: F81866 H/W Monitor

#### → PC Health Status


The following system parameters and values are shown. The system parameters that are monitored are:

- System Temperatures:
  - CPU Temperature
  - System Temperature
- Fan Speeds:
  - CPU Fan Speed
  - System Fan Speed
- Voltages:
  - V\_CPU\_CORE
  - +5V
  - +12V
  - V\_SM
  - VSB5V
  - VCC3V
  - VSB3V
  - VBAT

## IMB-H810-i2 microATX Motherboard

### 5.3.8.1 Smart Fan Mode Configuration

Use the **Smart Fan Mode Configuration** submenu (**BIOS Menu 13**) to configure smart fan temperature and speed settings.

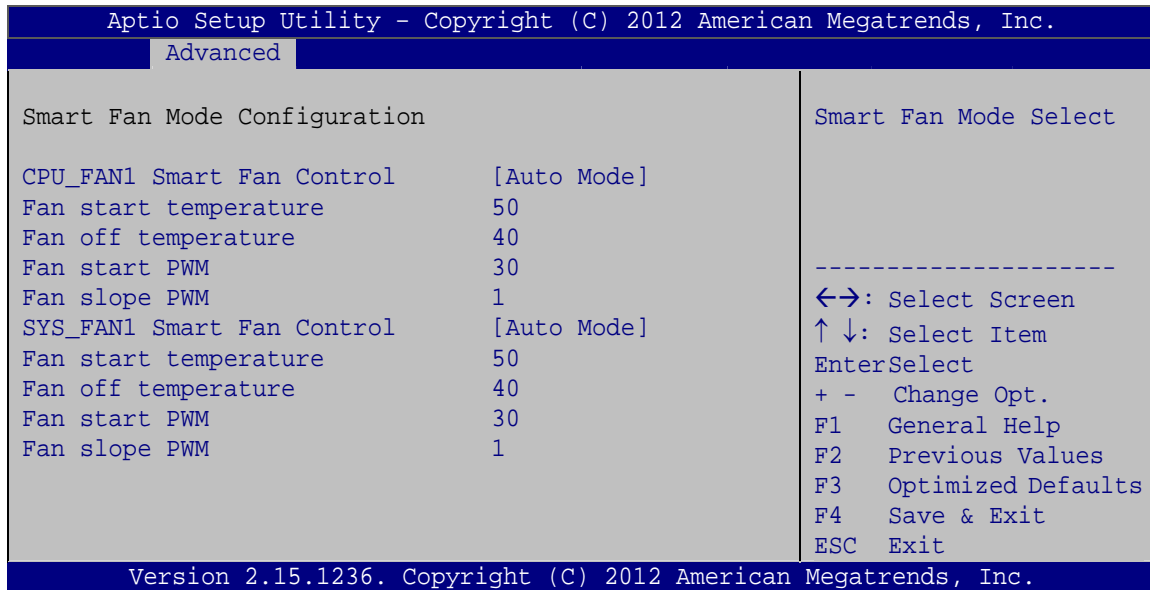

#### BIOS Menu 13: Smart Fan Mode Configuration

##### → CPU\_FAN1 Smart Fan Control/SYS\_FAN1 Smart Fan Control [Auto Mode]

Use the **CPU\_FAN1 Smart Fan Control/SYS\_FAN1 Smart Fan Control** option to configure the CPU/System Smart Fan.

- **Manual Mode**                      The fan spins at the speed set in Manual Mode settings.
- **Auto Mode**                      **DEFAULT**      The fan adjusts its speed using Auto Mode settings.

##### → Fan start/off temperature

Use the + or – key to change the **Fan start/off temperature** value. Enter a decimal number between 1 and 100.



### → Fan start PWM

Use the + or – key to change the **Fan start PWM** value. Enter a decimal number between 1 and 128.

### → Fan slope PWM

Use the + or – key to change the **Fan slope PWM** value. Enter a decimal number between 1 and 64.

## 5.3.9 F81216 Secondary Super IO Configuration

Use the **F81216 Secondary Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the serial ports.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
F81216 Second super IO Configuration
F81216 Second Super IO Chip      F81216 SecondIo
> Serial Port 7 Configuration
> Serial Port 8 Configuration
> Serial Port 9 Configuration
> Serial Port 10 Configuration

Set Parameters of Serial
Port 7 (COMG)

-----
<=>: Select Screen
↑↓: Select Item
EnterSelect
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit


Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

### BIOS Menu 14: F81216 Secondary Super IO Configuration

## IMB-H810-i2 microATX Motherboard

### 5.3.9.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

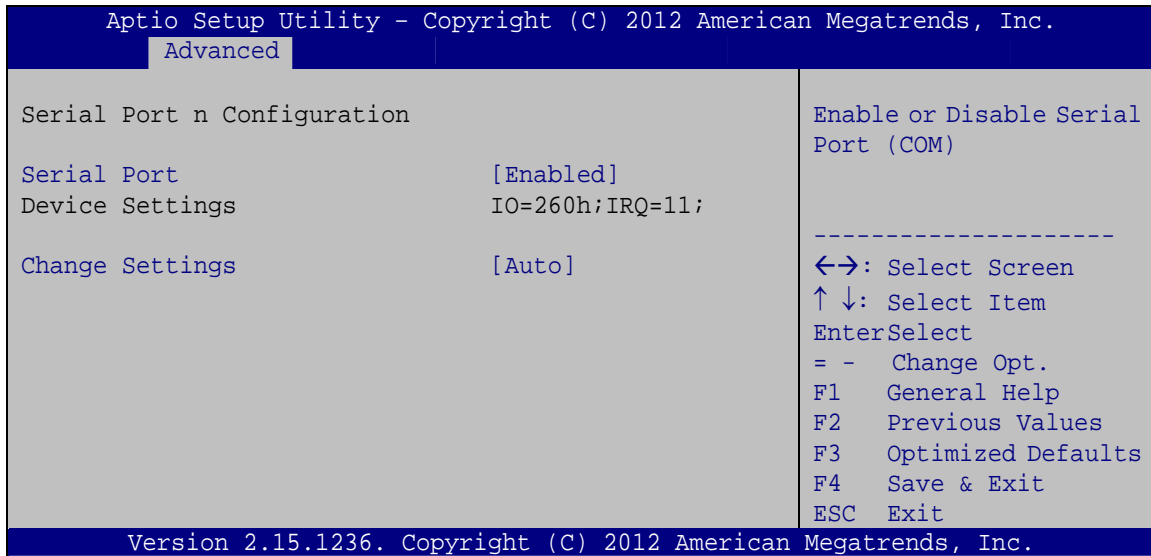

#### BIOS Menu 15: Serial Port n Configuration Menu

##### 5.3.9.1.1 Serial Port 7 Configuration

###### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**            **DEFAULT**      Enable the serial port

###### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**            **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=260h;**  
**IRQ=11**                      Serial Port I/O port address is 260h and the interrupt address is IRQ11

- **IO=260h;**  
**IRQ=10, 11**      Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- **IO=268h;**  
**IRQ=10, 11**      Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- **IO=270h;**  
**IRQ=10, 11**      Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- **IO=278h;**  
**IRQ=10, 11**      Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

### 5.3.9.1.2 Serial Port 8 Configuration

#### → Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**      Disable the serial port
- **Enabled**      **DEFAULT**      Enable the serial port

#### → Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**      **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=268h;**  
**IRQ=11**      Serial Port I/O port address is 268h and the interrupt address is IRQ11
- **IO=260h;**  
**IRQ=10, 11**      Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- **IO=268h;**  
**IRQ=10, 11**      Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- **IO=270h;**  
**IRQ=10, 11**      Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11

## IMB-H810-i2 microATX Motherboard

- ➔ **IO=278h;**  
**IRQ=10, 11**      Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

### 5.3.9.1.3 Serial Port 9 Configuration

#### ➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled**      Disable the serial port
- ➔ **Enabled**      **DEFAULT**      Enable the serial port

#### ➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto**      **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=270h;**  
**IRQ=11**      Serial Port I/O port address is 270h and the interrupt address is IRQ11
- ➔ **IO=260h;**  
**IRQ=10, 11**      Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- ➔ **IO=268h;**  
**IRQ=10, 11**      Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- ➔ **IO=270h;**  
**IRQ=10, 11**      Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- ➔ **IO=278h;**  
**IRQ=10, 11**      Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

### 5.3.9.1.4 Serial Port 10 Configuration

→ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled      DEFAULT**      Enable the serial port

→ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto              DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=278h;  
IRQ=11**                      Serial Port I/O port address is 278h and the interrupt address is IRQ11
- **IO=260h;  
IRQ=10, 11**                      Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- **IO=268h;  
IRQ=10, 11**                      Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- **IO=270h;  
IRQ=10, 11**                      Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- **IO=278h;  
IRQ=10, 11**                      Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

→ **Device Mode [RS232]**

Use the **Device Mode** option to configure the serial port 10.

- **RS232              DEFAULT**      COM10 is configured as RS-232 serial port.
- **RS422/485**                      COM10 is configured as RS-422/485 serial port.



## IMB-H810-i2 microATX Motherboard

### 5.3.10 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 16**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
COM1
  Console Redirection      [Disabled]
  > Console Redirection Settings
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM2
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM3
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM4
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM5
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM6
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM7
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM8
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM9
  Console Redirection      [Disabled]
  > Console Redirection Settings
COM10
  Console Redirection      [Disabled]
  > Console Redirection Settings
-----
<=>: Select Screen
↑↓: Select Item
Enter>Select
+/-: Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

**BIOS Menu 16: Serial Port Console Redirection**

**→ Console Redirection [Disabled]**

Use **Console Redirection** option to enable or disable the console redirection function.

- **Disabled**      **DEFAULT**      Disabled the console redirection function
- **Enabled**                      Enabled the console redirection function

The following options are available in the **Console Redirection Settings** submenu when the Console Redirection option is enabled.

**→ Terminal Type [ANSI]**

Use the **Terminal Type** option to specify the remote terminal type.

- **VT100**                      The target terminal type is VT100
- **VT100+**                      The target terminal type is VT100+
- **VT-UTF8**                      The target terminal type is VT-UTF8
- **ANSI**              **DEFAULT**      The target terminal type is ANSI

**→ Bits per second [115200]**

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

- **9600**                      Sets the serial port transmission speed at 9600.
- **19200**                      Sets the serial port transmission speed at 19200.
- **57600**                      Sets the serial port transmission speed at 57600.
- **115200**              **DEFAULT**      Sets the serial port transmission speed at 115200.

**→ Data Bits [8]**

Use the **Data Bits** option to specify the number of data bits.

- **7**                      Sets the data bits at 7.
- **8**                      **DEFAULT**      Sets the data bits at 8.

## IMB-H810-i2 microATX Motherboard

### → Parity [None]

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- |   |              |                |   |
|---|--------------|----------------|---|
| → | <b>None</b>  | <b>DEFAULT</b> | No parity bit is sent with the data bits.                                 |
| → | <b>Even</b>  |                | The parity bit is 0 if the number of ones in the data bits is even.       |
| → | <b>Odd</b>   |                | The parity bit is 0 if the number of ones in the data bits is odd.        |
| → | <b>Mark</b>  |                | The parity bit is always 1. This option does not provide error detection. |
| → | <b>Space</b> |                | The parity bit is always 0. This option does not provide error detection. |


### → Stop Bits [1]

Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- |   |          |                |                                    |
|---|----------|----------------|------------------------------------|
| → | <b>1</b> | <b>DEFAULT</b> | Sets the number of stop bits at 1. |
| → | <b>2</b> |                | Sets the number of stop bits at 2. |

**5.3.11 iEi Feature**

Use the **iEi Feature** menu (**BIOS Menu 17**) to configure IEI One Key Recovery function.

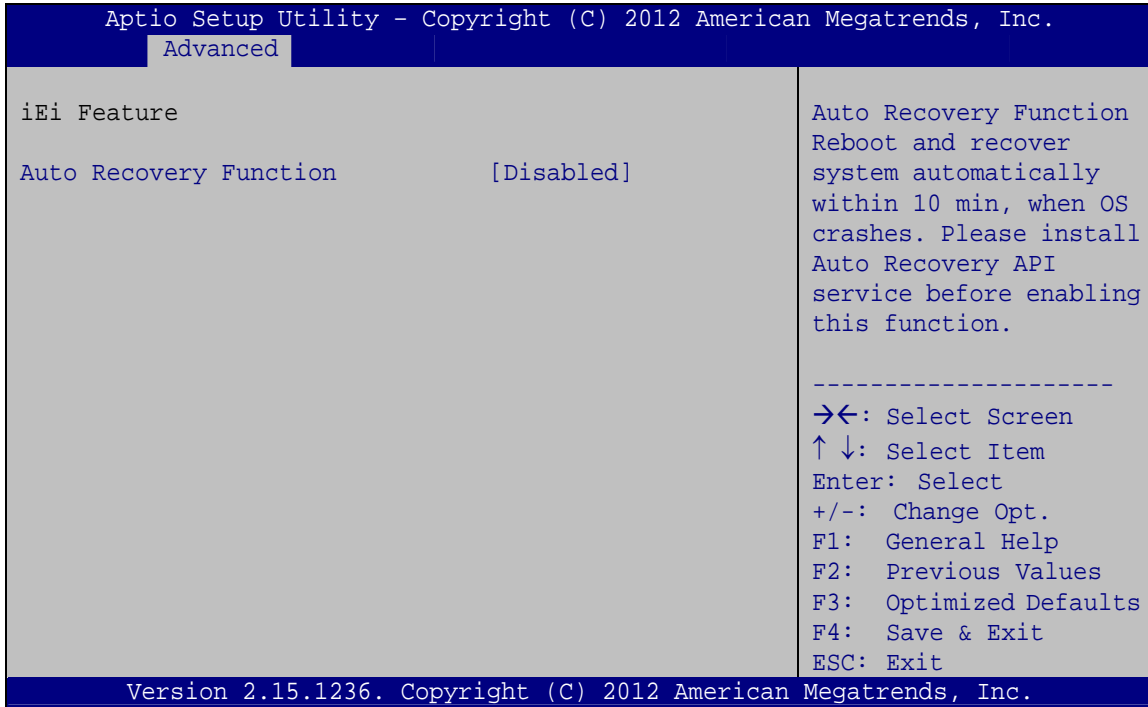

**BIOS Menu 17: iEi Feature**

➔ **Auto Recovery Function [Disabled]**

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

- ➔ **Disabled**      **DEFAULT**      Auto recovery function disabled
- ➔ **Enabled**                      Auto recovery function enabled

## IMB-H810-i2 microATX Motherboard

### 5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 18**) to access the PCH-IO and System Agent (SA) Subsystem configuration menus.



#### WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

```
Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit
-----
> PCH-IO Configuration          PCH Parameters.
> System Agent (SA) Configuration

-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit


Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
```

**BIOS Menu 18: Chipset**



### 5.4.1 PCH-IO Configuration

Use the **PCH-IO Configuration** menu (**BIOS Menu 19**) to configure the PCH chipset.

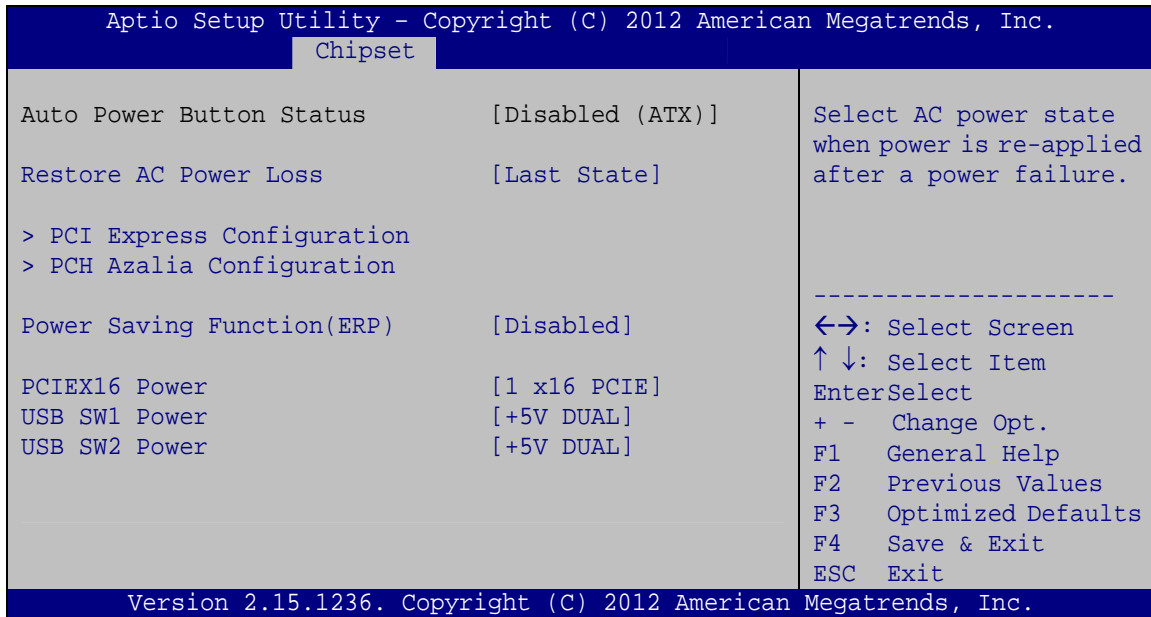

#### BIOS Menu 19: PCH-IO Configuration

##### → Restore on AC Power Loss [Last State]

Use the **Restore on AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

- **Power Off**                      The system remains turned off
- **Power On**                        The system turns on
- **Last State**    **DEFAULT**      The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

##### → Power Saving Function [Disabled]

Use the **Power Saving Function** BIOS option to enable or reduce power consumption in the S5 state. When enabled, the system can only be powered-up using the power button.

- **Disabled**    **DEFAULT**      Power Saving Function support disabled

## IMB-H810-i2 microATX Motherboard

➔ **Enabled** Power Saving Function support enabled

### ➔ **PCIEX16 Power [1 x16 PCIE]**

Use the **PCIEX16 Power** BIOS option to configure the PCIe x16 channel mode on the motherboard.

➔ **1 x16 PCIE** **DEFAULT** Configure the PCIe x16 slot as one PCIe x16

### ➔ **USB SW1 Power [+5V DUAL]**

Use the **USB SW1 Power** BIOS option to configure the USB power source for the corresponding USB connector (**Table 5-2**).

➔ **+5V** Set the USB power source to +5V

➔ **+5V DUAL** **DEFAULT** Set the USB power source to +5V dual

### ➔ **USB SW2 Power [+5V DUAL]**

Use the **USB SW2 Power** BIOS option to configure the USB power source for the corresponding USB connector (**Table 5-2**).

➔ **+5V** Set the USB power source to +5V


➔ **+5V DUAL** **DEFAULT** Set the USB power source to +5V dual

BIOS Options	Configured USB Ports
USB SW1 Power	LAN1_USB1 (external USB 3.0 ports) LAN2_USB2 (external USB 2.0 ports)
USB SW2 Power	USB3, USB4, USB5, USB6 (internal USB 2.0 ports)

**Table 5-2: BIOS Options and Configured USB Ports**

### 5.4.1.1 PCI Express Configuration

Use the **PCI Express Configuration** submenu (**BIOS Menu 20**) to configure the PCI Express slots.

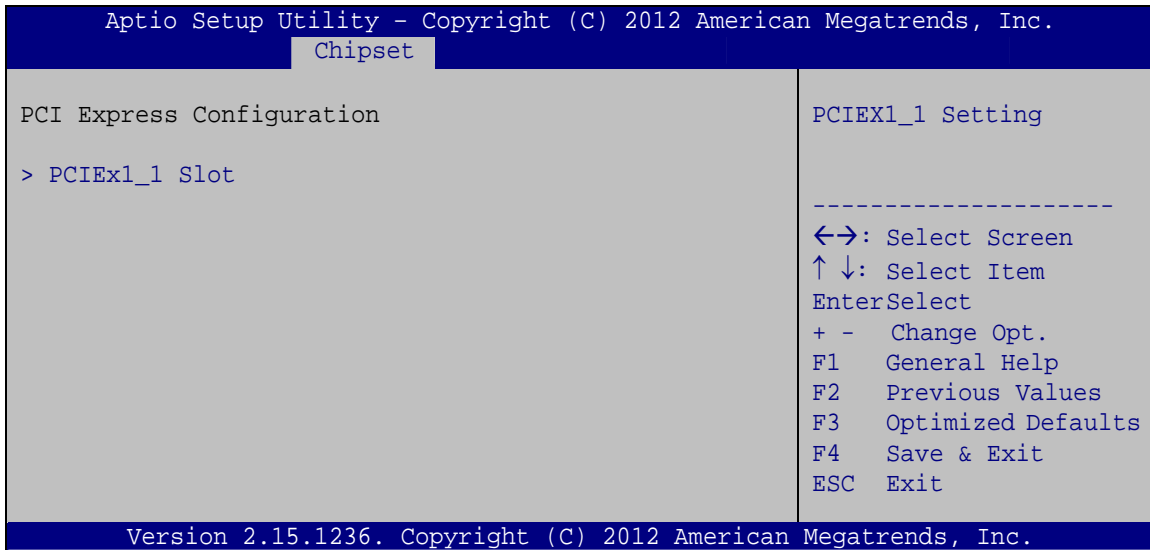

#### BIOS Menu 20: PCI Express Configuration

##### → PCIe Speed [Auto]

Use the **PCIe Speed** option to specify the PCI Express port speed. Configuration options are listed below.

- Auto                   **DEFAULT**
- Gen 1
- Gen 2

##### → Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to configure whether to detect if a non-compliance PCI Express device is connected to the PCI Express port.

- **Disabled**                   **DEFAULT**   Do not detect if a non-compliance PCI Express device is connected to the PCI Express port.

## IMB-H810-i2 microATX Motherboard

- ➔ **Enabled** Detect if a non-compliance PCI Express device is connected to the PCI Express port.

### 5.4.1.2 PCH Azalia Configuration

Use the **PCH Azalia Configuration** submenu (**BIOS Menu 21**) to configure the PCH Azalia codec.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Chipset
PCH Azalia Configuration
Azalia (HD Audio)                [Enabled]
Control Detection of the
Azalia device.
Disabled=Azalia will be
unconditionally
disabled.
Enabled=Azalia will be
unconditionally
Enabled.
-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+ - Change Opt.
F1 General Help
F2 Previous Values
F3 Optimized Defaults
F4 Save & Exit
ESC Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

#### BIOS Menu 21: PCH Azalia Configuration

- ➔ **Azalia [Enabled]**

Use the **Azalia** option to enable or disable the High Definition Audio controller.

- ➔ **Disabled** The onboard High Definition Audio controller is disabled
- ➔ **Enabled** **DEFAULT** The onboard High Definition Audio controller is detected automatically and enabled

### 5.4.2 System Agent (SA) Configuration

Use the **System Agent (SA) Configuration** menu (**BIOS Menu 22**) to configure the video device connected to the system.

```
Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Advanced
-----
> Graphics Configuration
> NB PCIe Configuration
> Memory Configuration

Config Graphics
Settings.

-----
<=>: Select Screen
↑↓: Select Item
Enter>Select
+/-: Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
```


#### BIOS Menu 22: System Agent (SA) Configuration



## IMB-H810-i2 microATX Motherboard

### 5.4.2.1 Graphics Configuration

Use the **Graphics Configuration** submenu (**BIOS Menu 23**) to configure the graphics settings.

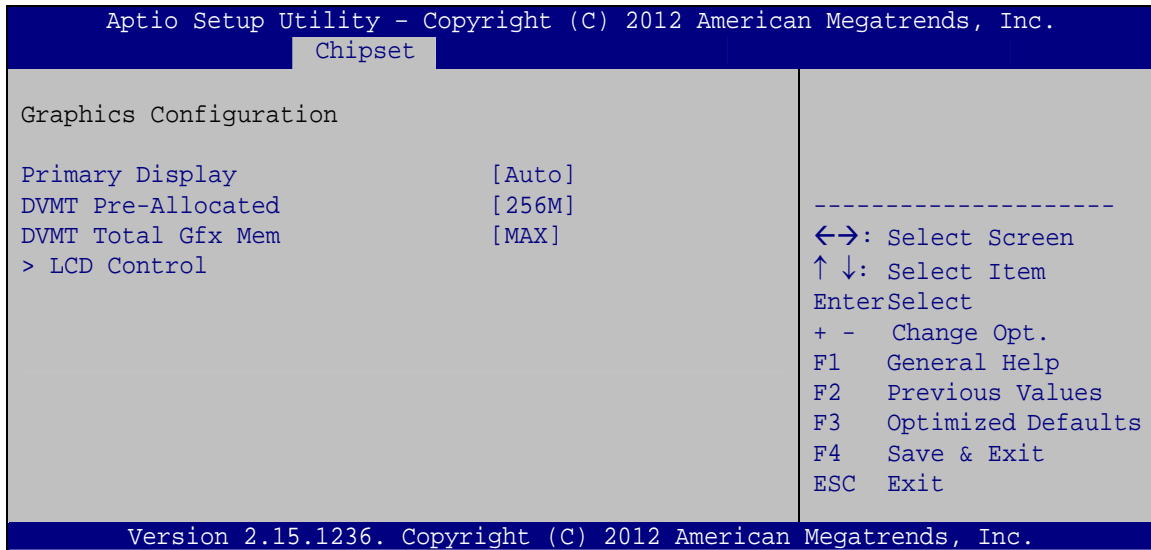

#### BIOS Menu 23: Graphics Configuration

##### → Primary Display [Auto]

Use the **Primary Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- Auto                   **DEFAULT**
- IGFX
- PEG
- PCIE/PCI

##### → DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to specify the amount of system memory that can be used by the internal graphics device.

- 32M                                   32 MB of memory used by internal graphics device
- 64M                                   64 MB of memory used by internal graphics device

## IMB-H810-i2 microATX Motherboard

- **128M** 128 MB of memory used by internal graphics device
- **256M**                    **DEFAULT** 256 MB of memory used by internal graphics device
- **512M** 512 MB of memory used by internal graphics device

### → **DVMT Total Gfx Mem [MAX]**


Use the **DVMT Total Gfx Mem** option to specify the maximum amount of memory that can be allocated as graphics memory. Configuration options are listed below.

- 128M
- 256M
- **MAX**                    **Default**

### **5.4.2.1.1 LCD Control**

Use the **LCD Control** submenu (**BIOS Menu 24**) to select a display device which will be activated during POST.

## IMB-H810-i2 microATX Motherboard

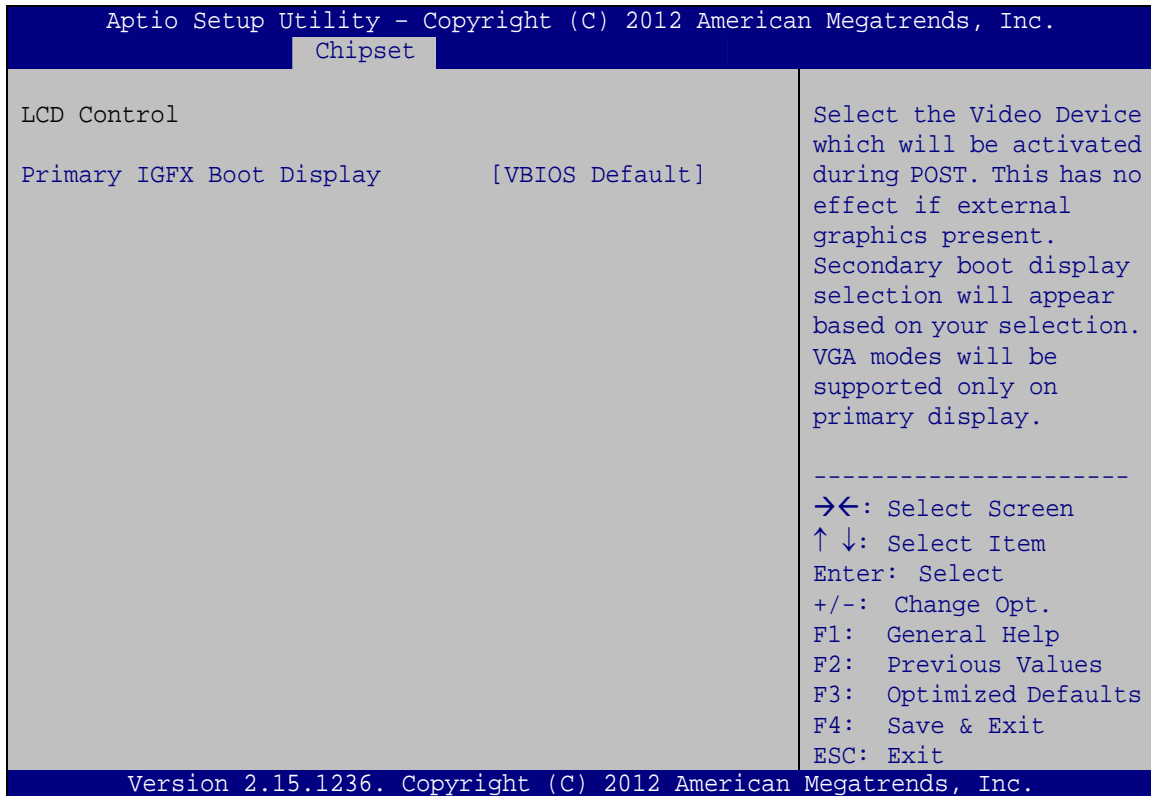
**BIOS Menu 24: LCD Control****→ Primary IGFX Boot Display [VBIOS Default]**

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS Default      **DEFAULT**
- CRT1
- CRT2
- DP

### 5.4.2.2 NB PCIe Configuration

Use the **NB PCIe Configuration** submenu (**BIOS Menu 25**) to configure the northbridge PCIe settings.

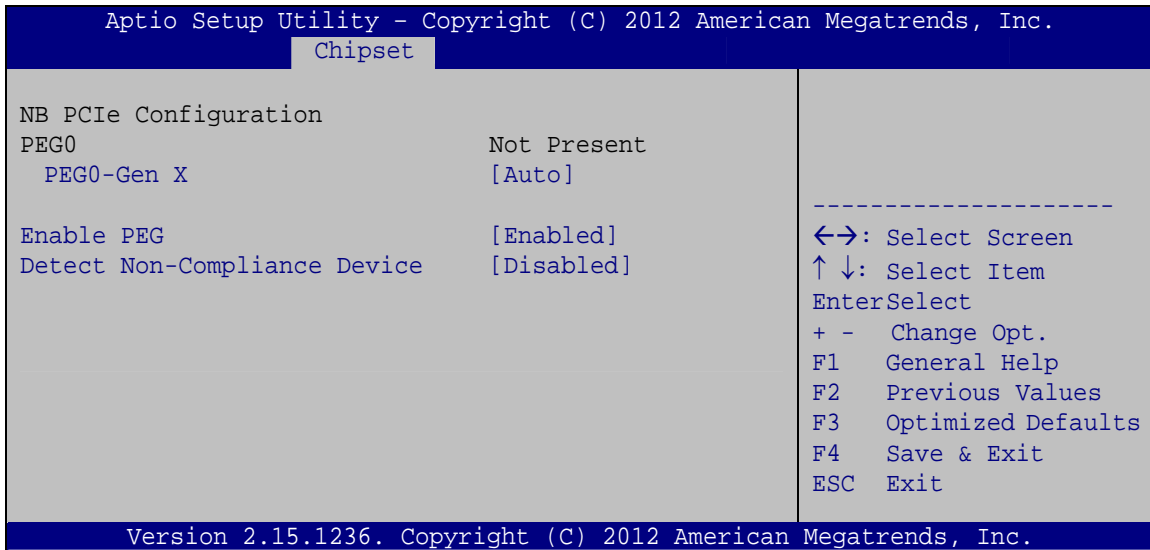

#### BIOS Menu 25: NB PCIe Configuration

##### → PEG0-Gen X [Gen1]

Use the **PEG0-Gen X** option to configure PEG0 B0:D1:F0. Configuration options are listed below.

- Auto **Default**
- Gen1
- Gen2

##### → Enable PEG [Enabled]

Use the **Enable PEG** option to enable or disable PEG.

- Disabled Disables PEG.
- Enabled **DEFAULT** Enables PEG.
- Auto Automatically detect PEG

## IMB-H810-i2 microATX Motherboard


### → Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to detect non-compliance PCIe device in PEG.

- **Disabled**                      **DEFAULT**      Do not detect non-compliance PCIe device in PEG
- **Enabled**                                      Detect non-compliance PCIe device in PEG

### 5.4.2.3 Memory Configuration

Use the **Memory Configuration** submenu (**BIOS Menu 26**) to configure the Memory settings.

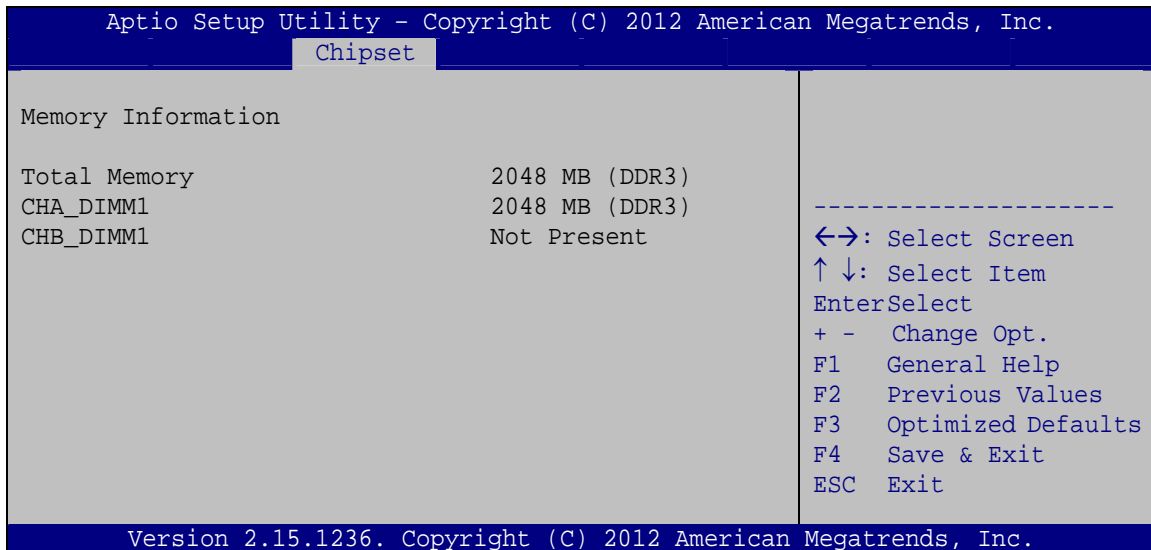


### BIOS Menu 26: Memory Configuration



## 5.5 Boot

Use the **Boot** menu (**BIOS Menu 27**) to configure system boot options.

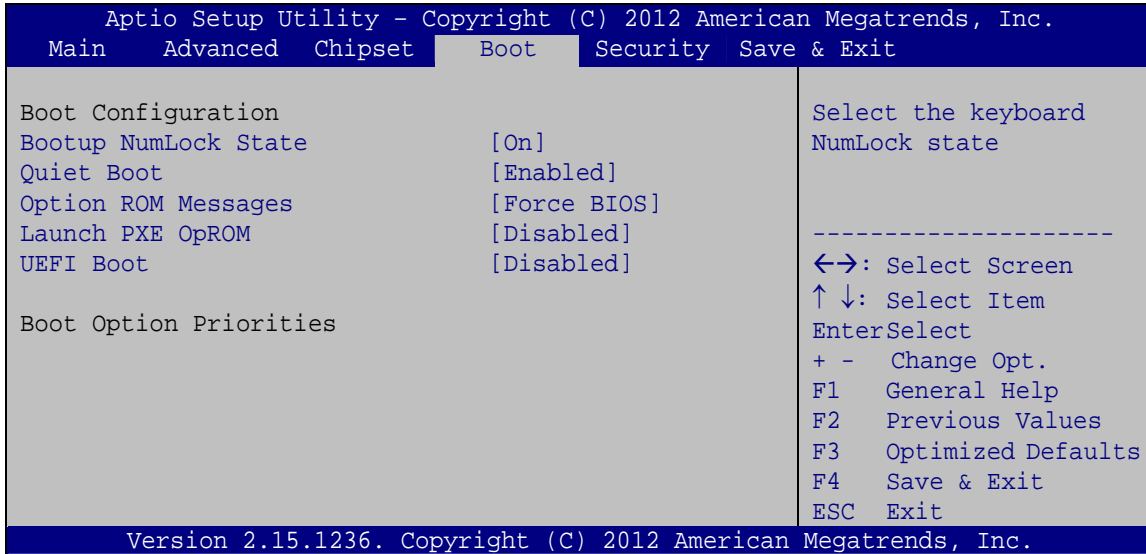

### BIOS Menu 27: Boot

#### → Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ **On**                      **DEFAULT**      Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ **Off**                              Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

## IMB-H810-i2 microATX Motherboard

### → Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** Normal POST messages displayed
- **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

### → Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
- **Keep Current** Sets display mode to current.

### → Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- **Disabled** **DEFAULT** Ignore all PXE Option ROMs
- **Enabled** Load PXE Option ROMs


### → UEFI Boot [Disabled]

Use the **UEFI Boot** option to enable or disable to boot from a UEFI device.

- **Disabled** **DEFAULT** Disable to boot from a UEFI device.
- **Enabled** Enable to boot from a UEFI device.

## 5.6 Security

Use the **Security** menu (**BIOS Menu 28**) to set system and user passwords.

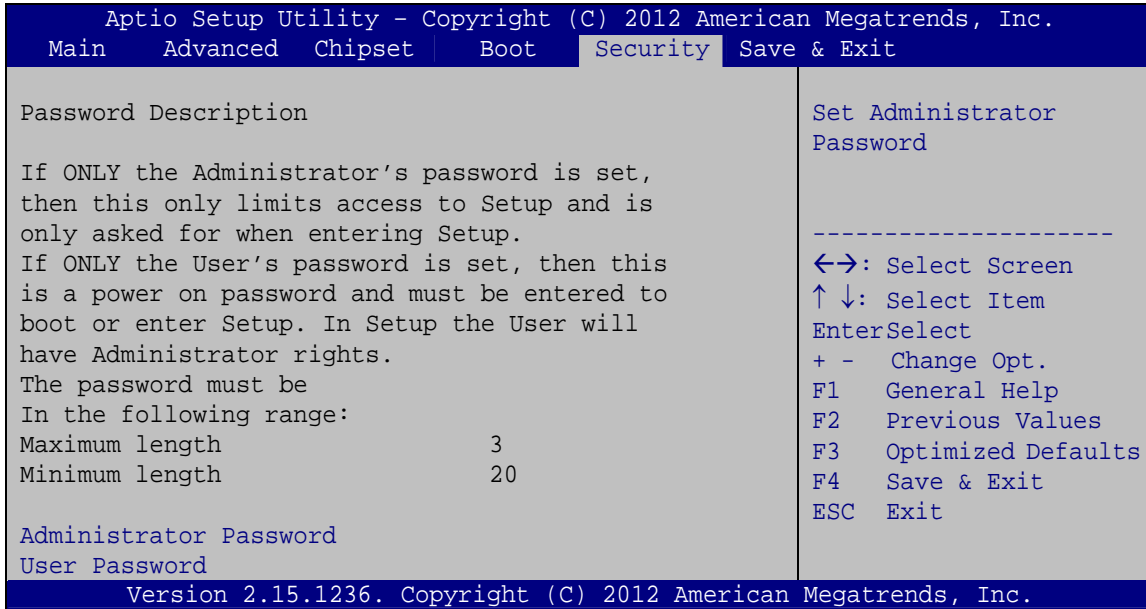

### BIOS Menu 28: Security

#### → Administrator Password

Use the **Administrator Password** to set or change a administrator password.

#### → User Password

Use the **User Password** to set or change a user password.

## 5.7 Exit

Use the **Exit** menu (**BIOS Menu 29**) to load default BIOS values, optimal failsafe values and to save configuration changes.

## IMB-H810-i2 microATX Motherboard

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced   Chipset   Boot   Security   Save & Exit
-----
Save Changes and Reset
Discard Changes and Reset

Restore Defaults
Save as User Defaults
Restore User Defaults

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+ -   Change Opt.
F1    General Help
F2    Previous Values
F3    Optimized Defaults
F4    Save & Exit
ESC   Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

```

**BIOS Menu 29:Exit****→ Save Changes and Reset**

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

**→ Discard Changes and Reset**

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

**→ Restore Defaults**

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

**→ Save as User Defaults**

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

**→ Restore User Defaults**

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Chapter

**6**

# Software Drivers

---



## IMB-H810-i2 microATX Motherboard

### 6.1 Available Software Drivers

---

**NOTE:**

The content of the CD may vary throughout the life cycle of the product and is subject to change without prior notice. Visit the IEI website or contact technical support for the latest updates.

---

The following drivers can be installed on the system:

- Chipset
- Graphics
- LAN
- USB 3.0
- Audio

Installation instructions are given below.

### 6.2 Software Installation

All the drivers for the IMB-H810-i2 are on the CD that came with the system. To install the drivers, please follow the steps below.

**Step 1:** Insert the CD into a CD drive connected to the system.

---

**NOTE:**

If the installation program doesn't start automatically:  
Click "Start->My Computer->CD Drive->autorun.exe"

---

**Step 2:** The driver main menu appears (**Figure 6-1**).



**Figure 6-1: Introduction Screen**

**Step 3:** Click **IMB-H810**.

**Step 4:** A new screen with a list of available drivers appears (**Figure 6-2**).



**Figure 6-2: Available Drivers**

**Step 5:** Install all of the necessary drivers in this menu.

## IMB-H810-i2 microATX Motherboard

### 6.3 Chipset Driver Installation

To install the chipset driver, please do the following.

**Step 1:** Access the driver list. (See **Section 6.2**)

**Step 2:** Click “1-Chipset”.

**Step 3:** Locate the setup file and double click on it.

**Step 4:** When the setup files are completely extracted, the **Welcome Screen** in **Figure 6-3** appears.

**Step 5:** Click **Next** to continue.



**Figure 6-3: Chipset Driver Welcome Screen**

**Step 6:** The license agreement in **Figure 6-4** appears.

**Step 7:** Read the **License Agreement**.

**Step 8:** Click **Yes** to continue.






**Figure 6-4: Chipset Driver License Agreement**

**Step 9:** The Read Me file in **Figure 6-5** appears.

**Step 10:** Click **Next** to continue.

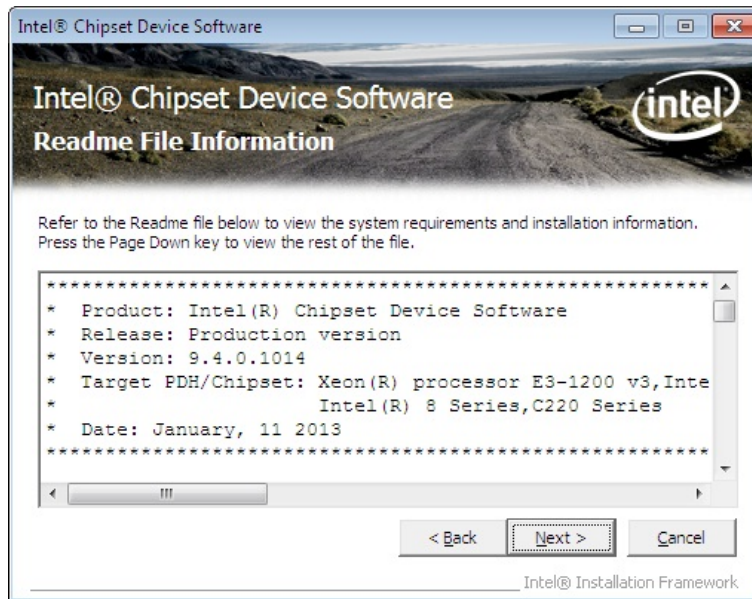


**Figure 6-5: Chipset Driver Read Me File**

## IMB-H810-i2 microATX Motherboard

**Step 11:** Setup Operations are performed as shown in Figure 6-6.

**Step 12:** Once the Setup Operations are complete, click **Next** to continue.

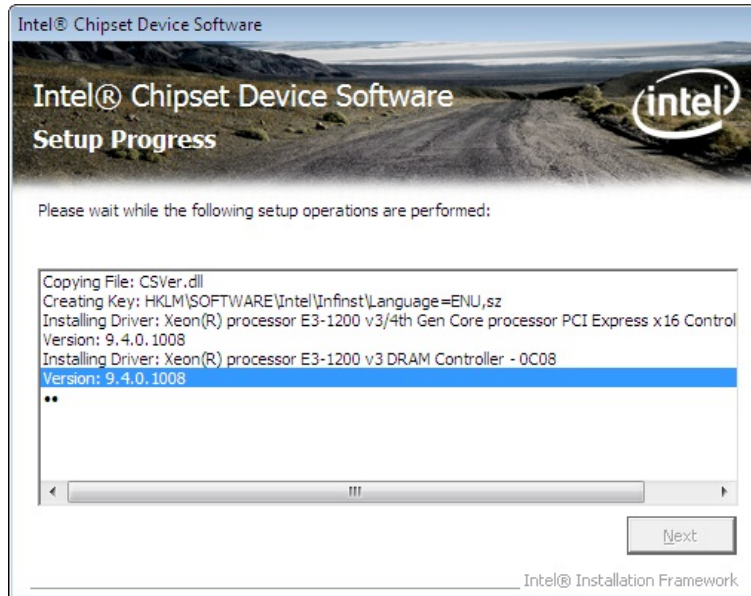

**Figure 6-6: Chipset Driver Setup Operations**

**Step 13:** The **Finish** screen in Figure 6-7 appears.

**Step 14:** Select “**Yes, I want to restart this computer now**” and click **Finish**.





**Figure 6-7: Chipset Driver Installation Finish Screen**

## 6.4 Graphics Driver Installation

To install the Graphics driver, please do the following.

- Step 1:** Access the driver list. (See **Section 6.2**)
- Step 2:** Click "**2-Graphics**" and select the folder which corresponds to the operating system.
- Step 3:** Locate the setup file and double click on it.
- Step 4:** The **Welcome Screen** in **Figure 6-8** appears.
- Step 5:** Click **Next** to continue.


## IMB-H810-i2 microATX Motherboard



**Figure 6-8: Graphics Driver Welcome Screen**


**Step 6:** The **License Agreement** in **Figure 6-9** appears.

**Step 7:** Click **Yes** to accept the agreement and continue.

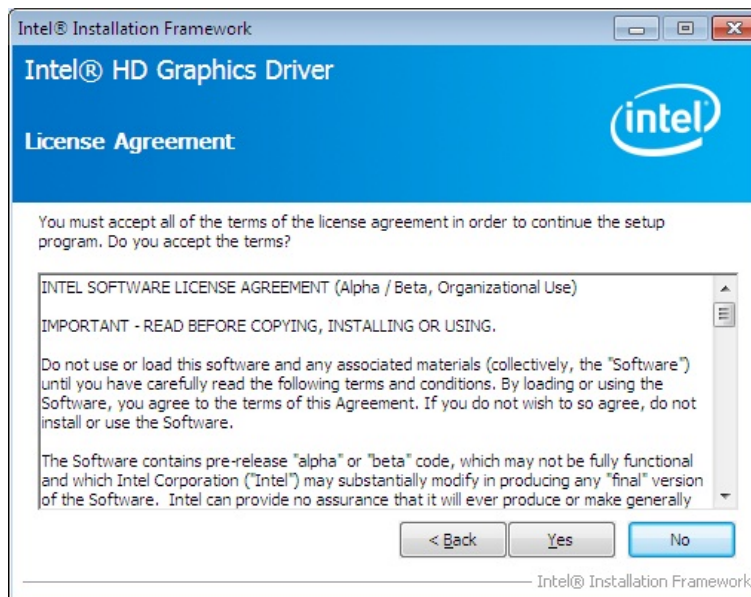

**Figure 6-9: Graphics Driver License Agreement**


**Step 8:** The **Read Me** file in **Figure 6-10** appears. Click **Next** to continue.

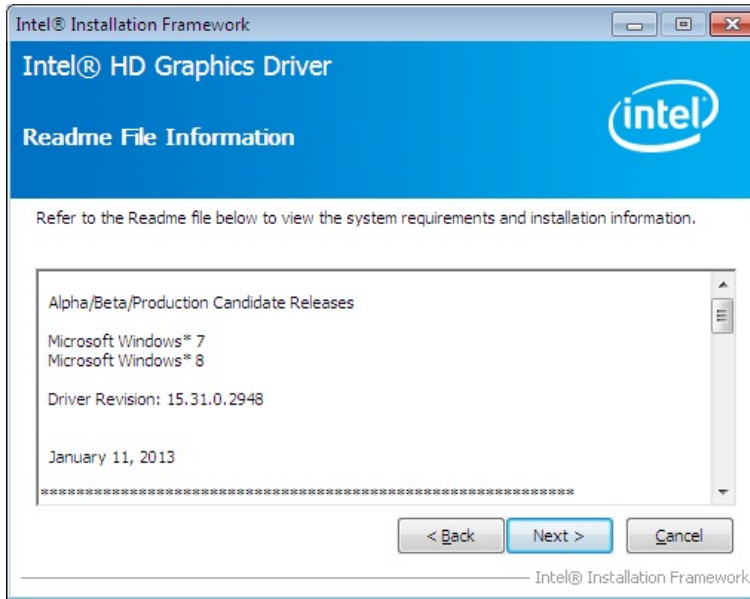

**Figure 6-10: Graphics Driver Read Me File**

**Step 9:** **Setup Operations** are performed as shown in **Figure 6-11**.

**Step 10:** Once the **Setup Operations** are complete, click **Next** to continue.

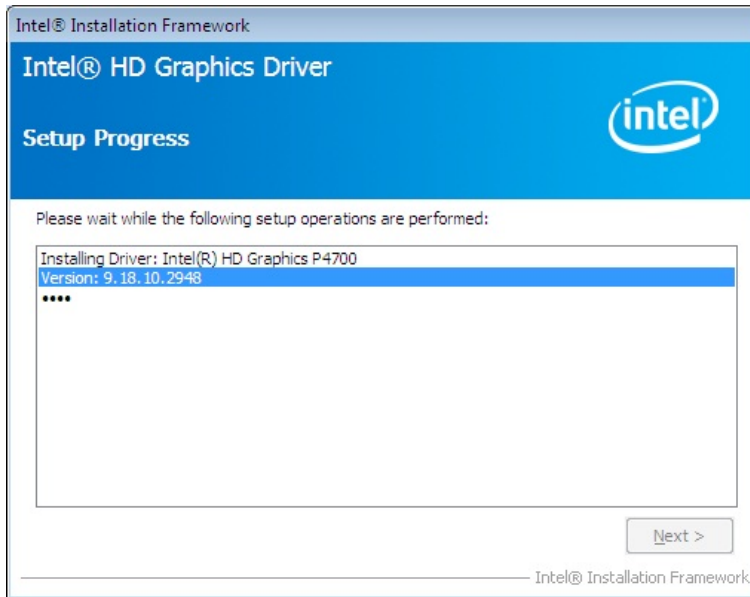


**Figure 6-11: Graphics Driver Setup Operations**

## IMB-H810-i2 microATX Motherboard

**Step 11:** The **Finish** screen in **Figure 6-12** appears.

**Step 12:** Select “**Yes, I want to restart this computer now**” and click **Finish**.

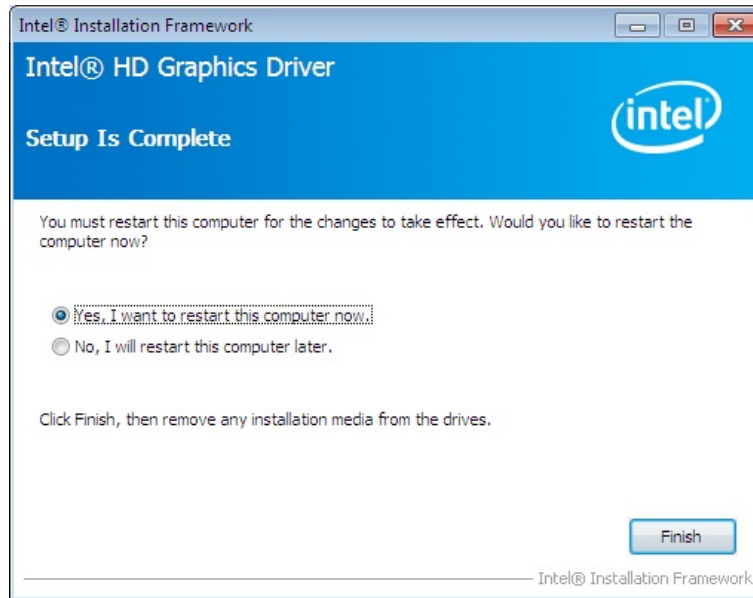


**Figure 6-12: Graphics Driver Installation Finish Screen**

## 6.5 LAN Driver Installation

To install the LAN driver, please do the following.

**Step 1:** Right-click the Computer button from the start menu and select **Properties**.  
(**Figure 6-13**).




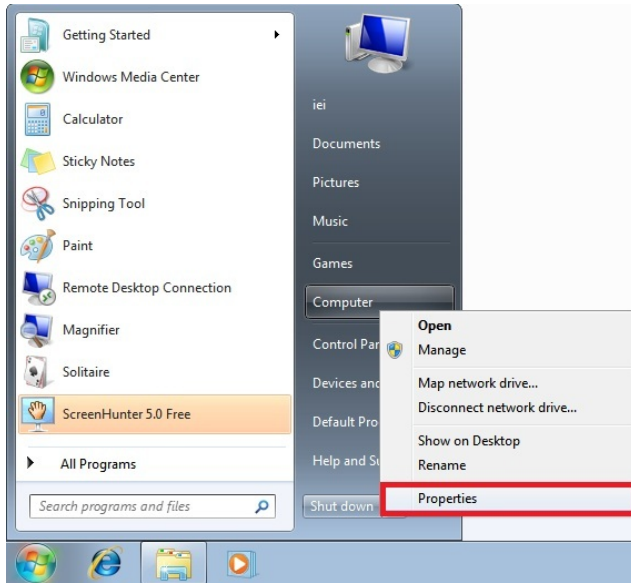

**Figure 6-13: Windows Control Panel**

**Step 2:** The system control panel window in **Figure 6-14** appears.

**Step 3:** Click the Device Manager link (**Figure 6-14**).

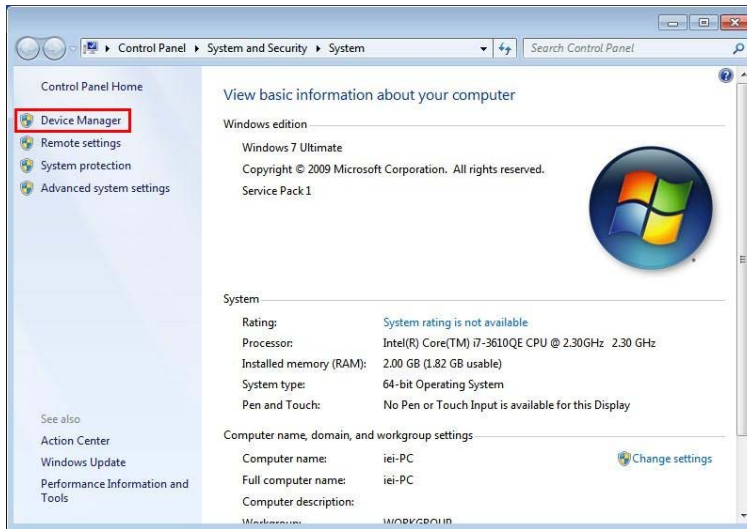

**Figure 6-14: System Control Panel**


**Step 4:** A list of system hardware devices appears (**Figure 6-15**).

**Step 5:** Right-click one of the Ethernet controllers that has question marks next to it (this means Windows does not recognize the device).



## IMB-H810-i2 microATX Motherboard

**Step 6:** Select **Update Driver Software**. See **Figure 6-15**.

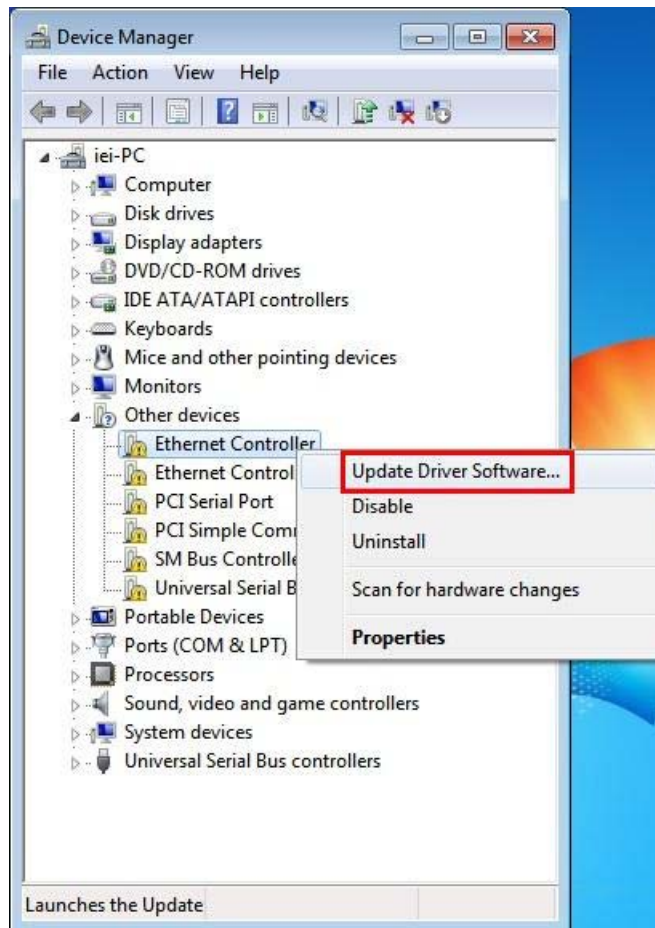

**Figure 6-15: Device Manager List**

**Step 7:** The Update Driver Software Window appears (**Figure 6-16**).

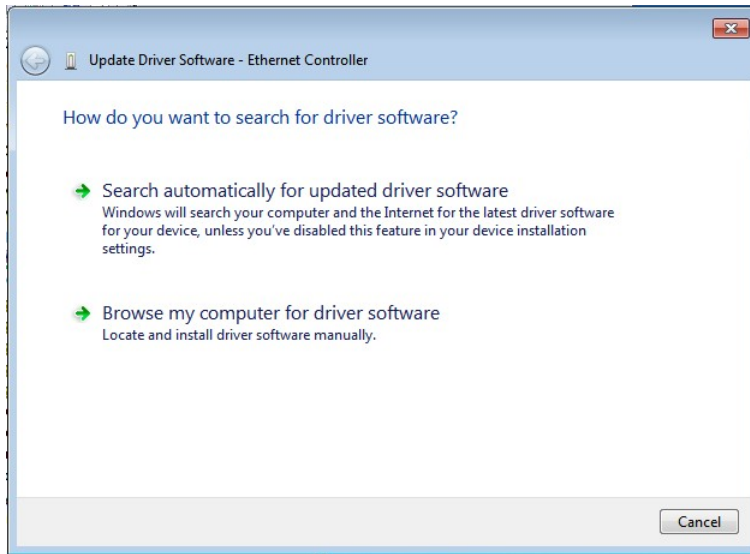


Figure 6-16: Update Driver Software Window

**Step 8:** Select “Browse my computer for driver software” and click **NEXT** to continue.

**Step 9:** Click Browse to select “X:\3-LAN” directory in the **Locate File** window, where “X:\” is the system CD drive. (Figure 6-17).


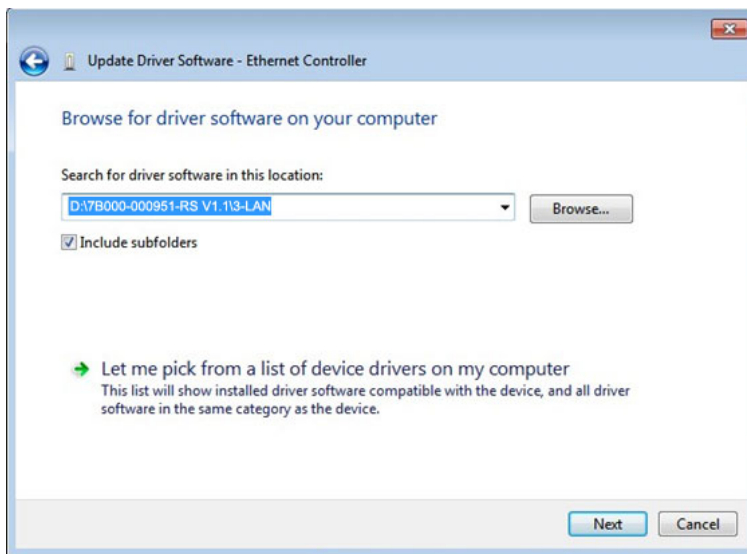


Figure 6-17: Locate Driver Files

**Step 10:** Click **NEXT** to continue.

**Step 11:** Driver Installation is performed as shown in **Figure 6-18**.

## IMB-H810-i2 microATX Motherboard

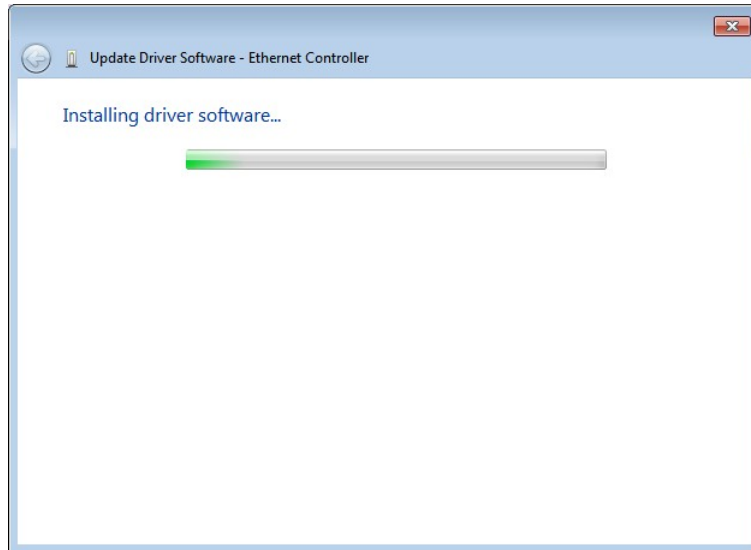

**Figure 6-18: LAN Driver Installation**

**Step 12:** The **Finish** screen appears. Click **Close** to exit.

**Step 13:** Right-click the other Ethernet controller that has question marks next to it as shown in **Figure 6-15**. Repeat **Step 6 ~ Step 12** to install the second Ethernet controller driver.

## 6.6 USB 3.0 Driver Installation



### **WARNING!**

Do not run this driver's installer (Setup.exe) from a USB storage device (ie. external USB hard drive or USB thumb drive). For proper installation, please copy driver files to a local hard drive folder and run from there.

To install the USB 3.0 driver, please follow the steps below.

**Step 1:** Access the driver list. (See **Section 6.2**)

**Step 2:** Click "**4-USB 3.0**".

**Step 3:** Locate the setup file and double click on it.

**Step 4:** A **Welcome Screen** appears (**Figure 6-19**).

**Step 5:** Click **Next** to continue.



**Figure 6-19: USB 3.0 Driver Welcome Screen**

**Step 6:** The license agreement in **Figure 6-20** appears.

**Step 7:** Read the **License Agreement**.

**Step 8:** Click **Yes** to continue.



## IMB-H810-i2 microATX Motherboard



**Figure 6-20: USB 3.0 Driver License Agreement**

**Step 9:** The **Read Me** file in **Figure 6-21** appears.

**Step 10:** Click **Next** to continue.




**Figure 6-21: USB 3.0 Driver Read Me File**

**Step 11:** **Setup Operations** are performed as shown in **Figure 6-22**.

**Step 12:** Once the **Setup Operations** are complete, click **Next** to continue.



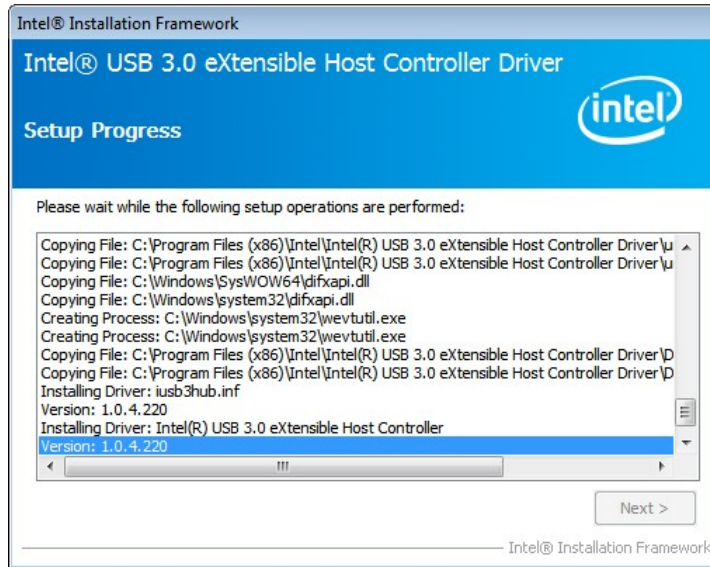

**Figure 6-22: USB 3.0 Driver Setup Operations**

**Step 13:** The **Finish** screen in **Figure 6-23** appears.

**Step 14:** Select **“Yes, I want to restart this computer now”** and click **Finish**.



**Figure 6-23: USB 3.0 Driver Installation Finish Screen**

## 6.7 Audio Driver Installation

To install the Realtek High Definition (HD) Audio driver, please follow the steps below.

### 6.7.1 BIOS Setup

**Step 1:** Enter the BIOS setup. To do this, reboot the system and press **DEL** during POST.

**Step 2:** Go to the PCH Azalia Configuration submenu. Enable the **Azalia** option. Refer to **Section 5.4.1.2**.

**Step 3:** Press **F10** to save the changes and exit the BIOS setup. The system reboots.

### 6.7.2 Driver Installation

To install the audio driver please follow the steps below. To install the audio driver, please do the following.


**Step 1:** Access the driver list. (See **Section 6.2**)

**Step 2:** Click "**5-Audio**" and select the folder which corresponds to the operating system.

**Step 3:** Double click the setup file.

**Step 4:** The **InstallShield Wizard** is prepared to guide the user through the rest of the process.


**Step 5:** Once initialized, the **InstallShield Wizard** welcome screen appears (**Figure 6-24**).

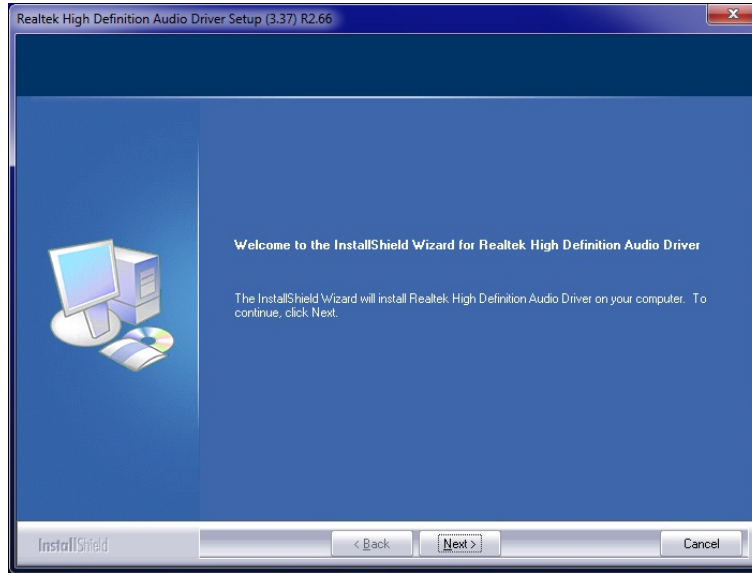

**Figure 6-24: InstallShield Wizard Welcome Screen**

**Step 6:** Click **Next** to continue the installation.


**Step 7:** InstallShield starts to install the new software as shown in **Figure 6-25**.

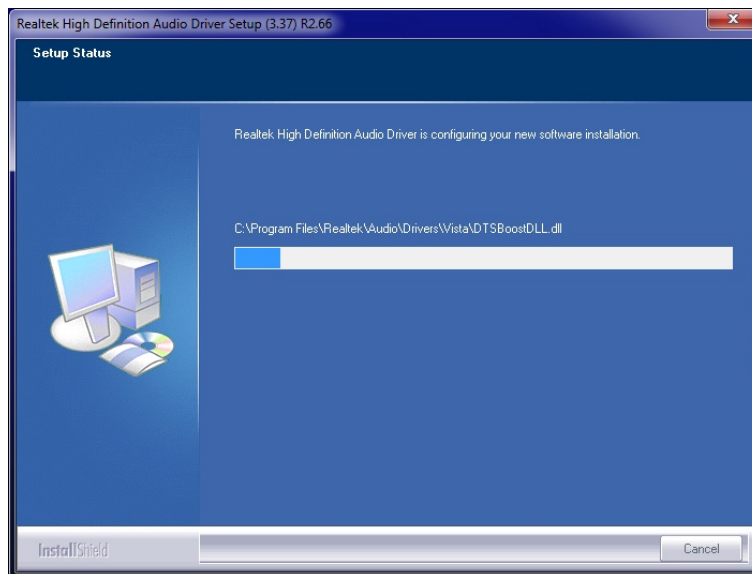

**Figure 6-25: Audio Driver Software Configuration**

**Step 8:** After the driver installation process is complete, a confirmation screen appears (**Figure 6-26**).

## IMB-H810-i2 microATX Motherboard

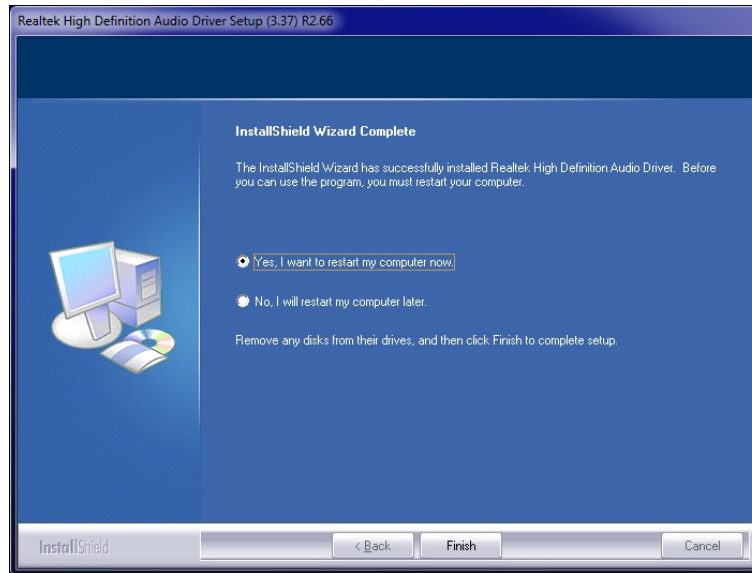

**Figure 6-26: Restart the Computer**

- Step 9:** The confirmation screen offers the option of restarting the computer now or later. For the settings to take effect, the computer must be restarted. Click **Finish** to restart the computer.

Appendix

**A**

# BIOS Options

---



## IMB-H810-i2 microATX Motherboard

Below is a list of BIOS configuration options in the BIOS chapter.

<b>System Date [xx/xx/xx]</b> .....	79
<b>System Time [xx:xx:xx]</b> .....	79
<b>ACPI Sleep State [S1 (CPU Stop Clock)]</b> .....	80
<b>Wake System with Fixed Time [Disabled]</b> .....	81
<b>Security Device Support [Disable]</b> .....	83
<b>Hyper-threading [Enabled]</b> .....	84
<b>Active Processor Cores [All]</b> .....	84
<b>Intel Virtualization Technology [Disabled]</b> .....	85
<b>EIST [Enabled]</b> .....	85
<b>SATA Controller(s) [Enabled]</b> .....	86
<b>SATA Mode Selection [IDE]</b> .....	86
<b>USB Devices</b> .....	87
<b>Legacy USB Support [Enabled]</b> .....	87
<b>Serial Port [Enabled]</b> .....	89
<b>Change Settings [Auto]</b> .....	89
<b>Serial Port [Enabled]</b> .....	90
<b>Change Settings [Auto]</b> .....	90
<b>Serial Port [Enabled]</b> .....	91
<b>Change Settings [Auto]</b> .....	91
<b>Serial Port [Enabled]</b> .....	91
<b>Change Settings [Auto]</b> .....	92
<b>Serial Port [Enabled]</b> .....	92
<b>Change Settings [Auto]</b> .....	92
<b>Serial Port [Enabled]</b> .....	93
<b>Change Settings [Auto]</b> .....	93
<b>Parallel Port [Enabled]</b> .....	94
<b>Change Settings [Auto]</b> .....	94
<b>Device Mode [STD Printer Mode]</b> .....	95
<b>PC Health Status</b> .....	96
<b>CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]</b> .....	97
<b>Fan start/off temperature</b> .....	97
<b>Fan start PWM</b> .....	98
<b>Fan slope PWM</b> .....	98

Serial Port [Enabled].....	99
Change Settings [Auto].....	99
Serial Port [Enabled].....	100
Change Settings [Auto].....	100
Serial Port [Enabled].....	101
Change Settings [Auto].....	101
Serial Port [Enabled].....	102
Change Settings [Auto].....	102
Device Mode [RS232].....	102
Console Redirection [Disabled] .....	104
Terminal Type [ANSI].....	104
Bits per second [115200].....	104
Data Bits [8] .....	104
Parity [None].....	105
Stop Bits [1].....	105
Auto Recovery Function [Disabled].....	106
Restore on AC Power Loss [Last State].....	108
Power Saving Function [Disabled].....	108
PCIEX16 Power [1 x16 PCIE].....	109
USB SW1 Power [+5V DUAL].....	109
USB SW2 Power [+5V DUAL].....	109
PCIe Speed [Auto].....	110
Detect Non-Compliance Device [Disabled] .....	110
Azalia [Enabled] .....	111
Primary Display [Auto] .....	113
DVMT Pre-Allocated [256M] .....	113
DVMT Total Gfx Mem [MAX].....	114
Primary IGFX Boot Display [VBIOS Default] .....	115
PEG0-Gen X [Gen1] .....	116
Enable PEG [Enabled] .....	116
Detect Non-Compliance Device [Disabled] .....	117
Bootup NumLock State [On].....	118
Quiet Boot [Enabled] .....	119
Option ROM Messages [Force BIOS].....	119
Launch PXE OpROM [Disabled].....	119

## IMB-H810-i2 microATX Motherboard

UEFI Boot [Disabled] .....	119
Administrator Password .....	120
User Password .....	120
Save Changes and Reset .....	121
Discard Changes and Reset .....	121
Restore Defaults .....	121
Save as User Defaults .....	121
Restore User Defaults .....	121

Appendix

**B**

# Terminology

---

## IMB-H810-i2 microATX Motherboard

<b>AC '97</b>	Audio Codec 97 (AC'97) refers to a codec standard developed by Intel® in 1997.
<b>ACPI</b>	Advanced Configuration and Power Interface (ACPI) is an OS-directed configuration, power management, and thermal management interface.
<b>AHCI</b>	Advanced Host Controller Interface (AHCI) is a SATA Host controller register-level interface.
<b>ATA</b>	The Advanced Technology Attachment (ATA) interface connects storage devices including hard disks and CD-ROM drives to a computer.
<b>ARMD</b>	An ATAPI Removable Media Device (ARMD) is any ATAPI device that supports removable media, besides CD and DVD drives.
<b>ASKIR</b>	Amplitude Shift Keyed Infrared (ASKIR) is a form of modulation that represents a digital signal by varying the amplitude (“volume”) of the signal. A low amplitude signal represents a binary 0, while a high amplitude signal represents a binary 1.
<b>BIOS</b>	The Basic Input/Output System (BIOS) is firmware that is first run when the computer is turned on and can be configured by the end user
<b>CODEC</b>	The Compressor-Decompressor (CODEC) encodes and decodes digital audio data on the system.
<b>CMOS</b>	Complimentary metal-oxide-conductor is an integrated circuit used in chips like static RAM and microprocessors.
<b>COM</b>	COM refers to serial ports. Serial ports offer serial communication to expansion devices. The serial port on a personal computer is usually a male DB-9 connector.
<b>DAC</b>	The Digital-to-Analog Converter (DAC) converts digital signals to analog signals.
<b>DDR</b>	Double Data Rate refers to a data bus transferring data on both the rising and falling edges of the clock signal.
<b>DMA</b>	Direct Memory Access (DMA) enables some peripheral devices to bypass the system processor and communicate directly with the system memory.



<b>DIMM</b>	Dual Inline Memory Modules are a type of RAM that offer a 64-bit data bus and have separate electrical contacts on each side of the module.
<b>DIO</b>	The digital inputs and digital outputs are general control signals that control the on/off circuit of external devices or TTL devices. Data can be read or written to the selected address to enable the DIO functions.
<b>EHCI</b>	The Enhanced Host Controller Interface (EHCI) specification is a register-level interface description for USB 2.0 Host Controllers.
<b>EIDE</b>	Enhanced IDE (EIDE) is a newer IDE interface standard that has data transfer rates between 4.0 MBps and 16.6 MBps.
<b>EIST</b>	Enhanced Intel® SpeedStep Technology (EIST) allows users to modify the power consumption levels and processor performance through application software. The application software changes the bus-to-core frequency ratio and the processor core voltage.
<b>FSB</b>	The Front Side Bus (FSB) is the bi-directional communication channel between the processor and the Northbridge chipset.
<b>GbE</b>	Gigabit Ethernet (GbE) is an Ethernet version that transfers data at 1.0 Gbps and complies with the IEEE 802.3-2005 standard.
<b>GPIO</b>	General purpose input
<b>HDD</b>	Hard disk drive (HDD) is a type of magnetic, non-volatile computer storage device that stores digitally encoded data.
<b>ICH</b>	The Input/Output Control Hub (ICH) is an Intel® Southbridge chipset.
<b>IrDA</b>	Infrared Data Association (IrDA) specify infrared data transmission protocols used to enable electronic devices to wirelessly communicate with each other.
<b>L1 Cache</b>	The Level 1 Cache (L1 Cache) is a small memory cache built into the system processor.
<b>L2 Cache</b>	The Level 2 Cache (L2 Cache) is an external processor memory cache.
<b>LCD</b>	Liquid crystal display (LCD) is a flat, low-power display device that consists of two polarizing plates with a liquid crystal panel in between.

## IMB-H810-i2 microATX Motherboard

<b>LVDS</b>	Low-voltage differential signaling (LVDS) is a dual-wire, high-speed differential electrical signaling system commonly used to connect LCD displays to a computer.
<b>POST</b>	The Power-on Self Test (POST) is the pre-boot actions the system performs when the system is turned-on.
<b>RAM</b>	Random Access Memory (RAM) is volatile memory that loses data when power is lost. RAM has very fast data transfer rates compared to other storage like hard drives.
<b>SATA</b>	Serial ATA (SATA) is a serial communications bus designed for data transfers between storage devices and the computer chipsets. The SATA bus has transfer speeds up to 1.5 Gbps and the SATA II bus has data transfer speeds of up to 3.0 Gbps.
<b>S.M.A.R.T</b>	Self Monitoring Analysis and Reporting Technology (S.M.A.R.T) refers to automatic status checking technology implemented on hard disk drives.
<b>UART</b>	Universal Asynchronous Receiver-transmitter (UART) is responsible for asynchronous communications on the system and manages the system's serial communication (COM) ports.
<b>UHCI</b>	The Universal Host Controller Interface (UHCI) specification is a register-level interface description for USB 1.1 Host Controllers.
<b>USB</b>	The Universal Serial Bus (USB) is an external bus standard for interfacing devices. USB 1.1 supports 12Mbps data transfer rates and USB 2.0 supports 480Mbps data transfer rates.
<b>VGA</b>	The Video Graphics Array (VGA) is a graphics display system developed by IBM.

Appendix

C

# One Key Recovery

---

## IMB-H810-i2 microATX Motherboard

### C.1 One Key Recovery Introduction

The IEI one key recovery is an easy-to-use front end for the Norton Ghost system backup and recovery tool. This tool provides quick and easy shortcuts for creating a backup and reverting to that backup or reverting to the factory default settings.



#### NOTE:

The latest One Key Recovery software provides an auto recovery function that allows a system running Microsoft Windows OS to automatically restore from the factory default image after encountering a Blue Screen of Death (BSoD) or a hang for around 10 minutes. Please refer to Section C.3 for the detailed setup procedure.

---

The IEI One Key Recovery tool menu is shown below.

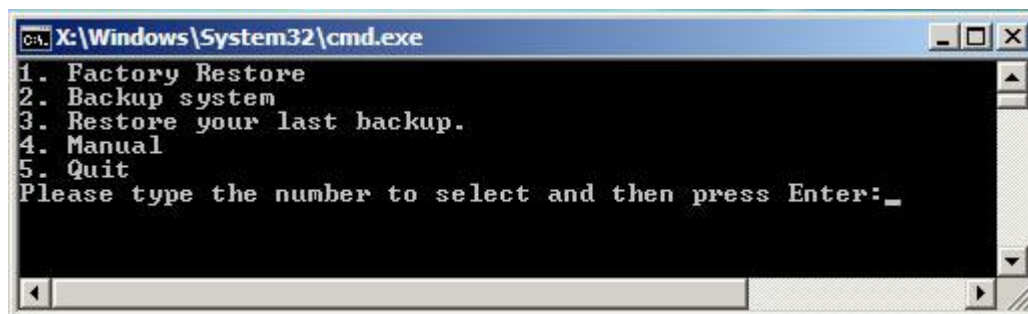


Figure C-1: IEI One Key Recovery Tool Menu

Prior to using the IEI One Key Recovery tool (as shown in **Figure C-1**) to backup or restore Windows system, five setup procedures are required.

1. Hardware and BIOS setup (see Section **C.2.1**)
2. Create partitions (see **Section C.2.2**)
3. Install operating system, drivers and system applications (see **Section C.2.3**)
4. Build the recovery partition (see **Section C.2.4**)
5. Create factory default image (see **Section C.2.5**)

After completing the five initial setup procedures as described above, users can access the recovery tool by pressing <F3> while booting up the system. The detailed information of each function is described in **Section C.5**.

**NOTE:**

The initial setup procedures for Linux system are described in **Section C.3**.


---

### C.1.1 System Requirement

---

**NOTE:**

The recovery CD can only be used with IEI products. The software will fail to run and a warning message will appear when used on non-IEI hardware.

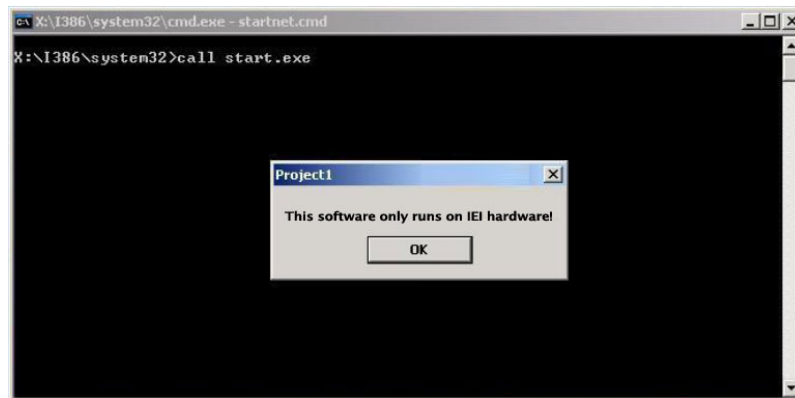

To create the system backup, the main storage device must be split into two partitions (three partitions for Linux). The first partition will be for the operating system, while the second partition will be invisible to the operating system and contain the backup made by the one key recovery software.

The partition created for recovery images must be big enough to contain both the factory default image and the user backup image. The size must be calculated before creating the



## IMB-H810-i2 microATX Motherboard

partitions. Please take the following table as a reference when calculating the size of the partition.

	OS	OS Image after Ghost	Compression Ratio
<b>Windows® 7</b>	7 GB	5 GB	70%
<b>Windows® XPE</b>	776 MB	560 MB	70%
<b>Windows® CE 6.0</b>	36 MB	28 MB	77%



### NOTE:

Specialized tools are required to change the partition size if the operating system is already installed.

---

### C.1.2 Supported Operating System

The recovery CD is compatible with both Microsoft Windows and Linux operating systems (OS). The supported OS versions are listed below.

- Microsoft Windows
  - Windows 2000
  - Windows XP (Service Pack 2 or 3 required)
  - Windows Vista
  - Windows 7
  - Windows CE 5.0
  - Windows CE 6.0
  - Windows XP Embedded
  - Windows Embedded Standard 7

**NOTE:**

The auto recovery function (described in Section C.3) and the restore through LAN function (described in Section C.6) are not supported in the Windows CE 5.0/6.0 operating system environment.

- Linux
  - Fedora Core 12 (Constantine)
  - Fedora Core 11 (Leonidas)
  - Fedora Core 10 (Cambridge)
  - Fedora Core 8 (Werewolf)
  - Fedora Core 7 (Moonshine)
  - RedHat RHEL-5.4
  - RedHat 9 (Ghirke)
  - Ubuntu 8.10 (Intrepid)
  - Ubuntu 7.10 (Gutsy)
  - Ubuntu 6.10 (Edgy)
  - Debian 5.0 (Lenny)
  - Debian 4.0 (Etch)
  - SuSe 11.2
  - SuSe 10.3

**NOTE:**

Installing unsupported OS versions may cause the recovery tool to fail.

## C.2 Setup Procedure for Windows

Prior to using the recovery tool to backup or restore, a few setup procedures are required.

**Step 1:** Hardware and BIOS setup (see **Section C.2.1**)

**Step 2:** Create partitions (see **Section C.2.2**)

## IMB-H810-i2 microATX Motherboard

**Step 3:** Install operating system, drivers and system applications (see **Section C.2.3**)

**Step 4:** Build the recovery partition (see **Section C.2.4**) or build the auto recovery partition (see **Section C.3**)

**Step 5:** Create factory default image (see **Section C.2.5**)

The detailed descriptions are described in the following sections.



### NOTE:

The setup procedures described below are for Microsoft Windows operating system users. For Linux, most of the setup procedures are the same except for several steps described in **Section C.3**.

---

### C.2.1 Hardware and BIOS Setup

**Step 1:** Make sure the system is powered off and unplugged.

**Step 2:** Install a hard drive or SSD in the system. An unformatted and unpartitioned disk is recommended.

**Step 3:** Connect an optical disk drive to the system and insert the recovery CD.

**Step 4:** Turn on the system.

**Step 5:** Press the <DELETE> key as soon as the system is turned on to enter the BIOS.

**Step 6:** Select the connected optical disk drive as the 1<sup>st</sup> boot device. (**Boot** → **Boot Device Priority** → **1<sup>st</sup> Boot Device**).

**Step 7:** Save changes and restart the computer. Continue to the next section for instructions on partitioning the internal storage.


### C.2.2 Create Partitions

To create the system backup, the main storage device must be split into two partitions (three partitions for Linux). The first partition will be for the operating system, while the

second partition will be invisible to the operating system and contain the backup made by the one key recovery software.

**Step 1:** Put the recovery CD in the optical drive of the system.

**Step 2:** **Boot the system from recovery CD.** When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!

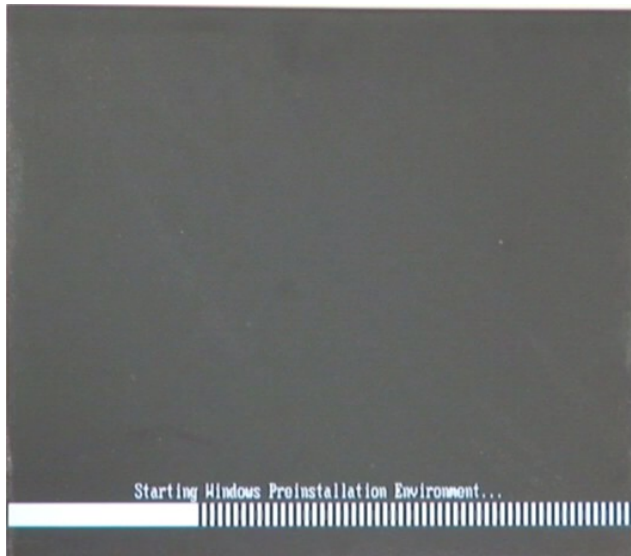

**Figure C-2: Launching the Recovery Tool**

**Step 3:** The recovery tool setup menu is shown as below.


```
C:\ C:\WINDOWS\system32\cmd.exe

1.Execute Ghost
2.Manual Recovery environment For Windows
3.Manual Recovery environment For Linux
4.Auto Recovery environment For Windows
5.Exit
6.Command Prompt
Type the number to print text.
```

**Figure C-3: Recovery Tool Setup Menu**

**Step 4:** Press <6> then <Enter>.

## IMB-H810-i2 microATX Motherboard

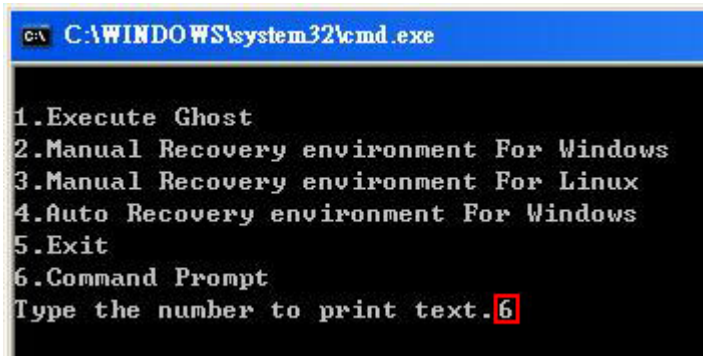

```
C:\WINDOWS\system32\cmd.exe

1.Execute Ghost
2.Manual Recovery environment For Windows
3.Manual Recovery environment For Linux
4.Auto Recovery environment For Windows
5.Exit
6.Command Prompt
Type the number to print text.6
```

Figure C-4: Command Prompt

**Step 5:** The command prompt window appears. Type the following commands (marked in red) to create two partitions. One is for the OS installation; the other is for saving recovery files and images which will be an invisible partition.

(Press <Enter> after entering each line below)

```
system32>diskpart
```

```
DISKPART>list vol
```

```
DISKPART>sel disk 0
```

```
DISKPART>create part pri size= ____
```

```
DISKPART>assign letter=N
```

```
DISKPART>create part pri size= ____
```

```
DISKPART>assign letter=F
```

```
DISKPART>exit
```

```
system32>format N: /fs:ntfs /q /y
```

```
system32>format F: /fs:ntfs /q /v:Recovery /y
```

```
system32>exit
```



```

C:\X:\I386\system32\CMD.EXE
X:\I386\SYSTEM32>diskpart → Starts the Microsoft disk partitioning tool.
Microsoft DiskPart version 5.2.3790.1830
Copyright (C) 1999-2001 Microsoft Corporation.
On computer: MININT-JUC

DISKPART> list vol → Show partition information

   Volume ###  Ltr  Label          Fs      Type          Size      Status       Info
   -----
   Volume 0      X    CD_ROM         CDFS    DUD-ROM       405 MB    Healthy      Boot
   Volume 1      D                    FAT32    Removeable    3854 MB    Healthy

DISKPART> sel disk 0 → Select a disk
Disk 0 is now the selected disk.

DISKPART> create part pri size=2000 → Create partition 1 and assign a size.
                                     This partition is for OS installation.
DiskPart succeeded in creating the specified partition.

DISKPART> assign letter=N → Assign partition 1 a code name (N).
DiskPart successfully assigned the drive letter or mount point.

DISKPART> create part pri size=1800 → Create partition 2 and assign a size.
                                     This partition is for recovery images.
DiskPart succeeded in creating the specified partition.

DISKPART> assign letter=F → Assign partition 2 a code name (F).
DiskPart successfully assigned the drive letter or mount point.

DISKPART> exit → Exit diskpart
X:\I386\SYSTEM32>format n: /fs:ntfs /q /y → Format partition 1 (N) as NTFS format.
The type of the file system is RAW.
The new file system is NTFS.
QuickFormatting 2000M
Creating file system structures.
Format complete.
 2048254 KB total disk space.
 2035620 KB are available.

X:\I386\SYSTEM32>format f: /fs:ntfs /q /v:Recovery /y → Formate partition 2 (F) as NTFS formate and
                                                         name it as "Recovery".
The type of the file system is RAW.
The new file system is NTFS.
QuickFormatting 1804M
Creating file system structures.
Format complete.
 1847474 KB total disk space.
 1835860 KB are available.

X:\I386\SYSTEM32>exit → Exit Windows PE
  
```

Figure C-5: Partition Creation Commands

## IMB-H810-i2 microATX Motherboard



### NOTE:

Use the following commands to check if the partitions were created successfully.

```
X:\I386\SYSTEM32>diskpart
Microsoft DiskPart version 5.2.3790.1830
Copyright (C) 1999-2001 Microsoft Corporation.
On computer: MININT-JUC
DISKPART> sel disk 0
Disk 0 is now the selected disk.
DISKPART> list part
  Partition ###  Type              Size      Offset
-----
  Partition 1    Primary           2000 MB    32 KB
  Partition 2    Primary           1804 MB    2000 MB
DISKPART> exit
```

**Step 6:** Press any key to exit the recovery tool and automatically reboot the system.

Please continue to the following procedure: Build the Recovery Partition.

### C.2.3 Install Operating System, Drivers and Applications

Install the operating system onto the unlabelled partition. The partition labeled "Recovery" is for use by the system recovery tool and should not be used for installing the operating system or any applications.



### NOTE:

The operating system installation program may offer to reformat the chosen partition. DO NOT format the partition again. The partition has already been formatted and is ready for installing the new operating system.

To install the operating system, insert the operating system installation CD into the optical drive. Restart the computer and follow the installation instructions.

### C.2.4 Building the Recovery Partition

- Step 1:** Put the recover CD in the optical drive.
- Step 2:** Start the system.
- Step 3:** **Boot the system from the recovery CD.** When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!

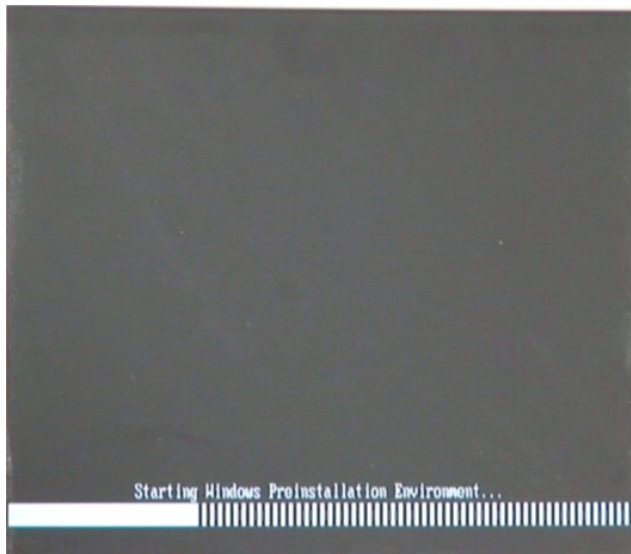


Figure C-6: Launching the Recovery Tool

- Step 4:** When the recovery tool setup menu appears, press <2> then <Enter>.


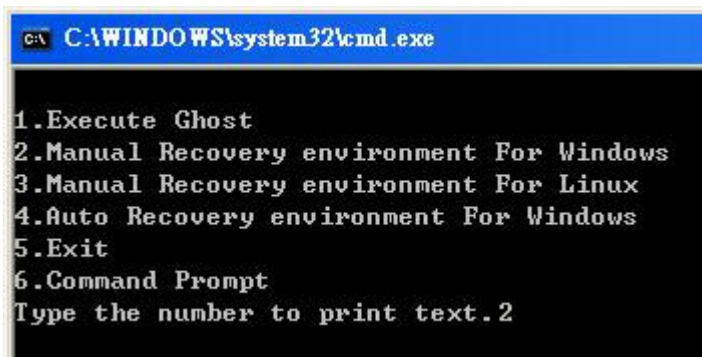


Figure C-7: Manual Recovery Environment for Windows




## IMB-H810-i2 microATX Motherboard

**Step 5:** The Symantec Ghost window appears and starts configuring the system to build a recovery partition. In this process the partition created for recovery files in **Section C.2.2** is hidden and the recovery tool is saved in this partition.

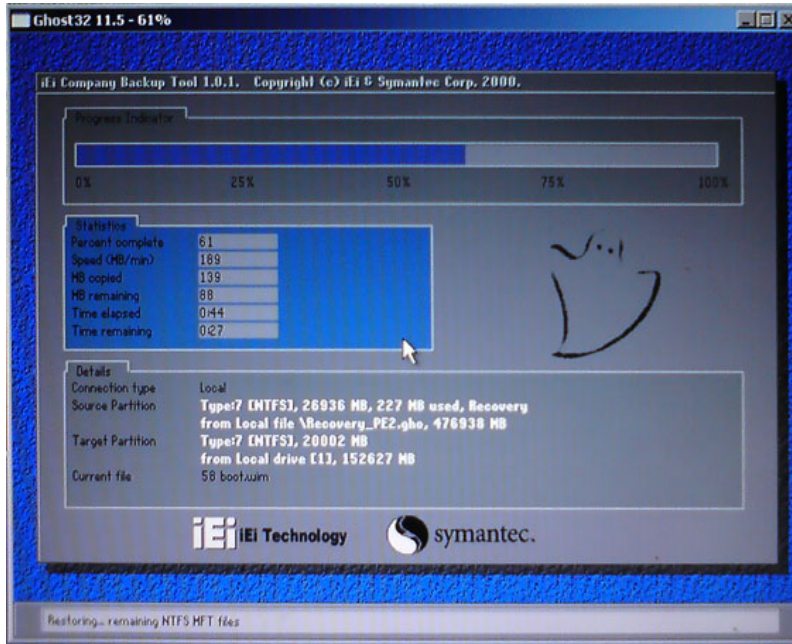

**Figure C-8: Building the Recovery Partition**

**Step 6:** After completing the system configuration, press any key in the following window to reboot the system.

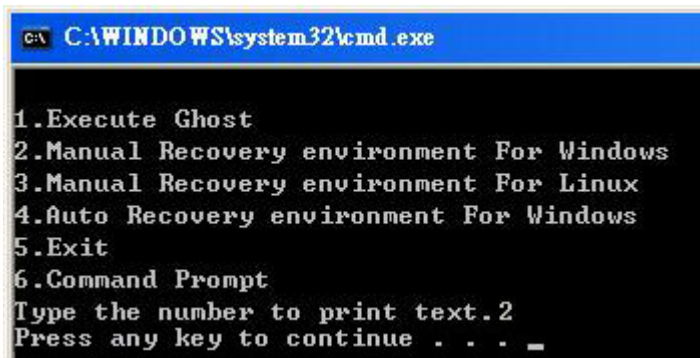

**Figure C-9: Press Any Key to Continue**

**Step 7:** Eject the recovery CD.

## C.2.5 Create Factory Default Image




### NOTE:

Before creating the factory default image, please configure the system to a factory default environment, including driver and application installations.

To create a factory default image, please follow the steps below.

**Step 1:** Turn on the system. When the following screen displays (**Figure C-10**), press the <F3> key to access the recovery tool. The message will display for 10 seconds, please press F3 before the system boots into the operating system.

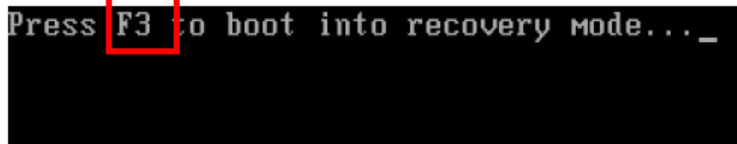

```
Press F3 to boot into recovery mode... _
```

Figure C-10: Press F3 to Boot into Recovery Mode

**Step 2:** The recovery tool menu appears. Type <4> and press <Enter>. (**Figure C-11**)

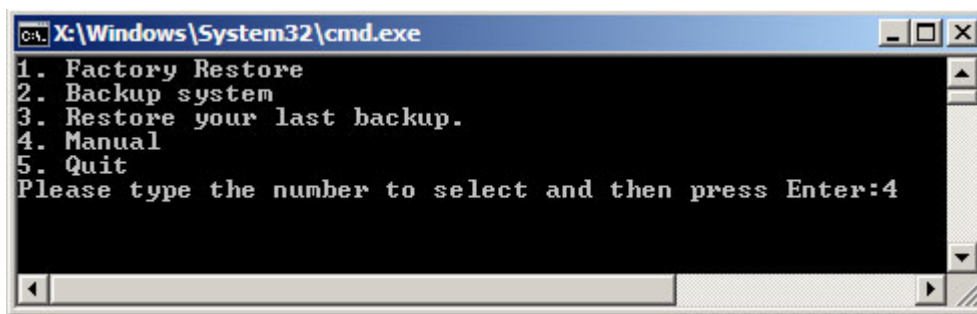


Figure C-11: Recovery Tool Menu

**Step 3:** The About Symantec Ghost window appears. Click **OK** button to continue.



IMB-H810-i2 microATX Motherboard

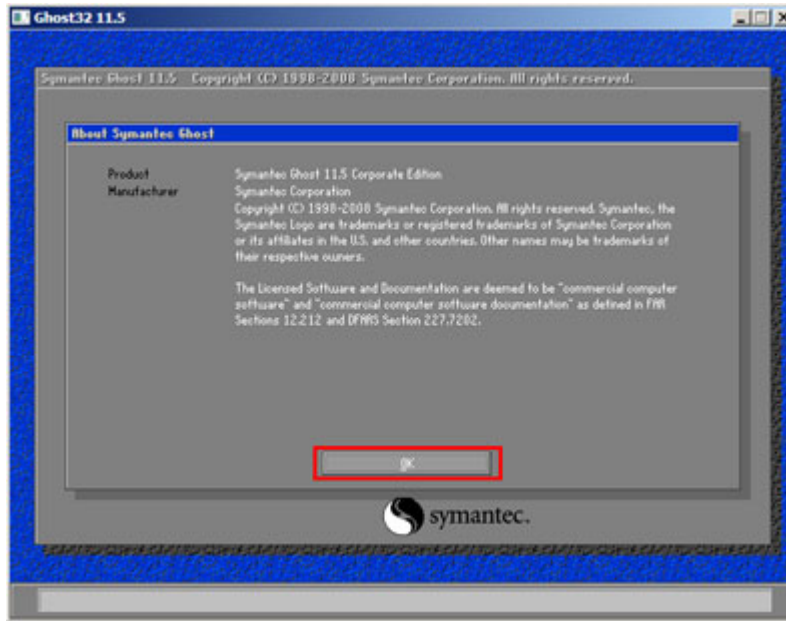


Figure C-12: About Symantec Ghost Window

**Step 4:** Use mouse to navigate to the option shown below (Figure C-13).


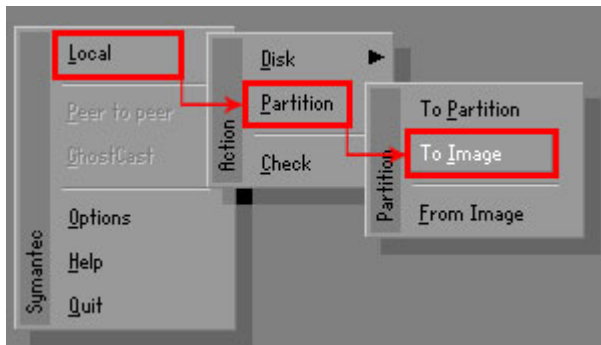



Figure C-13: Symantec Ghost Path

**Step 5:** Select the local source drive (Drive 1) as shown in Figure C-14. Then click OK.

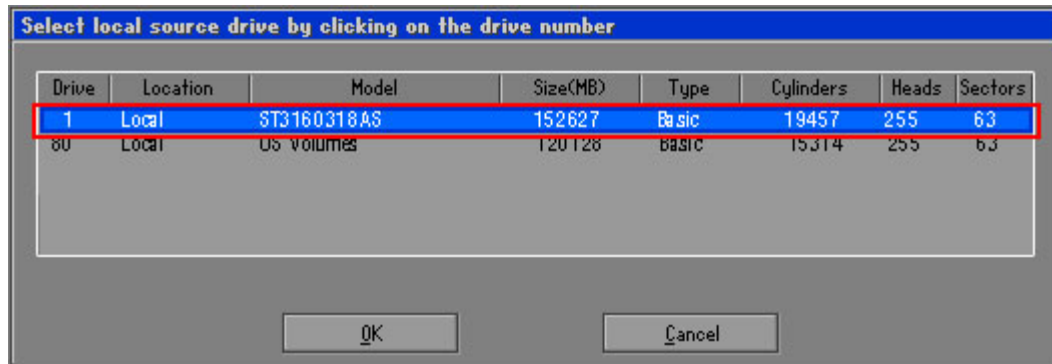

**Figure C-14: Select a Local Source Drive**

**Step 6:** Select a source partition (Part 1) from basic drive as shown in **Figure C-15**. Then click OK.

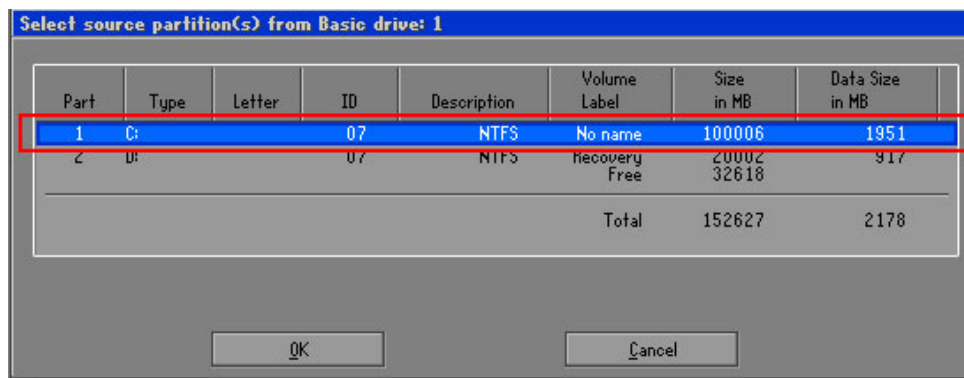

**Figure C-15: Select a Source Partition from Basic Drive**

**Step 7:** Select 1.2: **[Recovery] NTFS drive** and enter a file name called **iei** (**Figure C-16**). Click **Save**. The factory default image will then be saved in the selected recovery drive and named **IEI.GHO**.



**WARNING:**

The file name of the factory default image must be **iei.GHO**.

## IMB-H810-i2 microATX Motherboard

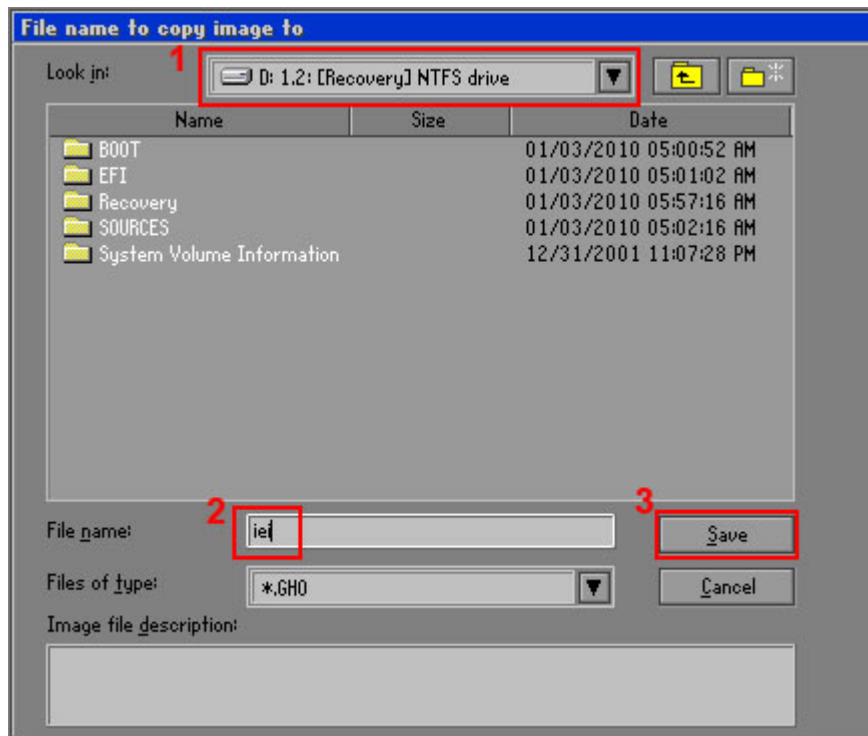


Figure C-16: File Name to Copy Image to

**Step 8:** When the Compress Image screen in **Figure C-17** prompts, click **High** to make the image file smaller.


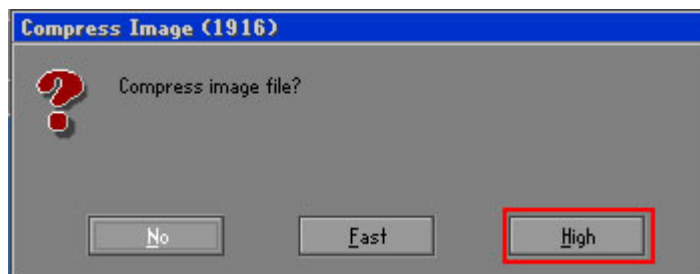



Figure C-17: Compress Image

**Step 9:** The Proceed with partition image creation window appears, click **Yes** to continue.

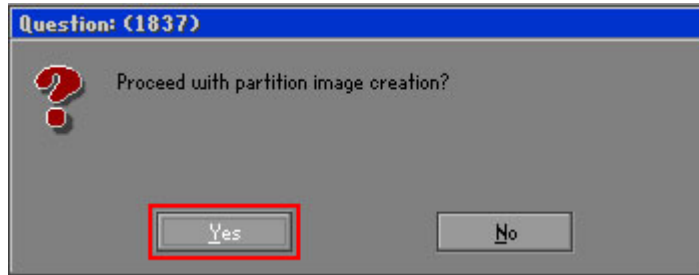

**Figure C-18: Image Creation Confirmation**


**Step 10:** The Symantec Ghost starts to create the factory default image (**Figure C-19**).

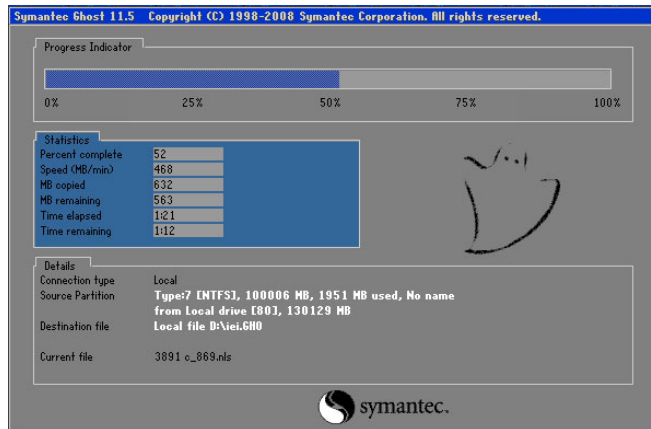

**Figure C-19: Image Creation Complete**

**Step 11:** When the image creation completes, a screen prompts as shown in **Figure C-20**.


Click **Continue** and close the Ghost window to exit the program.

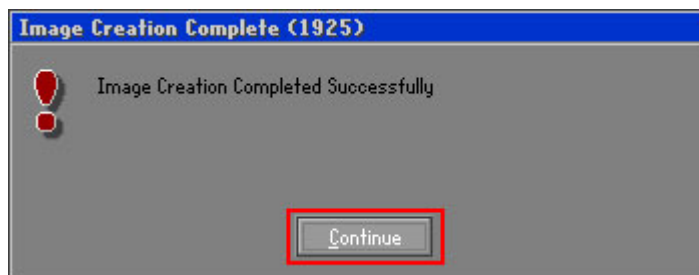

**Figure C-20: Image Creation Complete**

## IMB-H810-i2 microATX Motherboard

**Step 12:** The recovery tool main menu window is shown as below. Press any key to reboot the system.

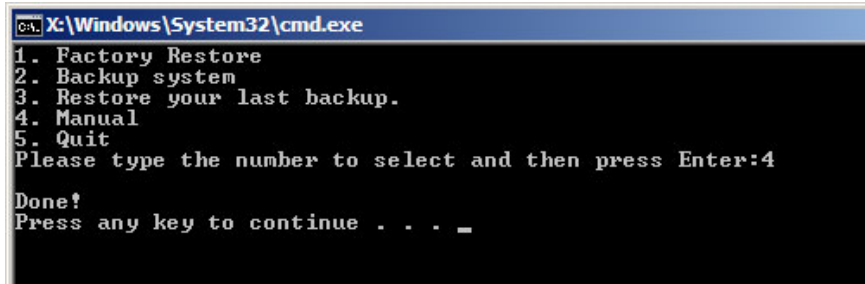

```
C:\Windows\System32\cmd.exe
1. Factory Restore
2. Backup system
3. Restore your last backup.
4. Manual
5. Quit
Please type the number to select and then press Enter:4
Done!
Press any key to continue . . . _
```

Figure C-21: Press Any Key to Continue

### C.3 Auto Recovery Setup Procedure

The auto recovery function allows a system to automatically restore from the factory default image after encountering a Blue Screen of Death (BSoD) or a hang for around 10 minutes. To use the auto recovery function, follow the steps described in the following sections.



#### CAUTION:

The auto recovery function can only run on a Microsoft Windows system with the following OS versions:

- Windows 2000
  - Windows XP
  - Windows Vista
  - Windows 7
  - Windows XP Embedded
  - Windows Embedded Standard 7
-



**CAUTION:**

The setup procedure may include a step to create a factory default image. It is suggested to configure the system to a factory default environment before the configuration, including driver and application installations.

**Step 1:** Follow the steps described in **Section C.2.1 ~ Section C.2.3** to setup BIOS, create partitions and install operating system.

**Step 2:** Install the auto recovery utility into the system by double clicking the **Utility/AUTORECOVERY-SETUP.exe** in the One Key Recovery CD. This utility **MUST** be installed in the system, otherwise, the system will automatically restore from the factory default image every ten (10) minutes.



**Figure C-22: Auto Recovery Utility**

**Step 3:** **Disable the automatically restart function before creating the factory default image.** Go to: My Computer → Properties → Advanced. Click the Settings button of Startup and Recovery. Deselect “Automatically restart”. Click OK to save the settings and exit. (See Figure C-23)

## IMB-H810-i2 microATX Motherboard

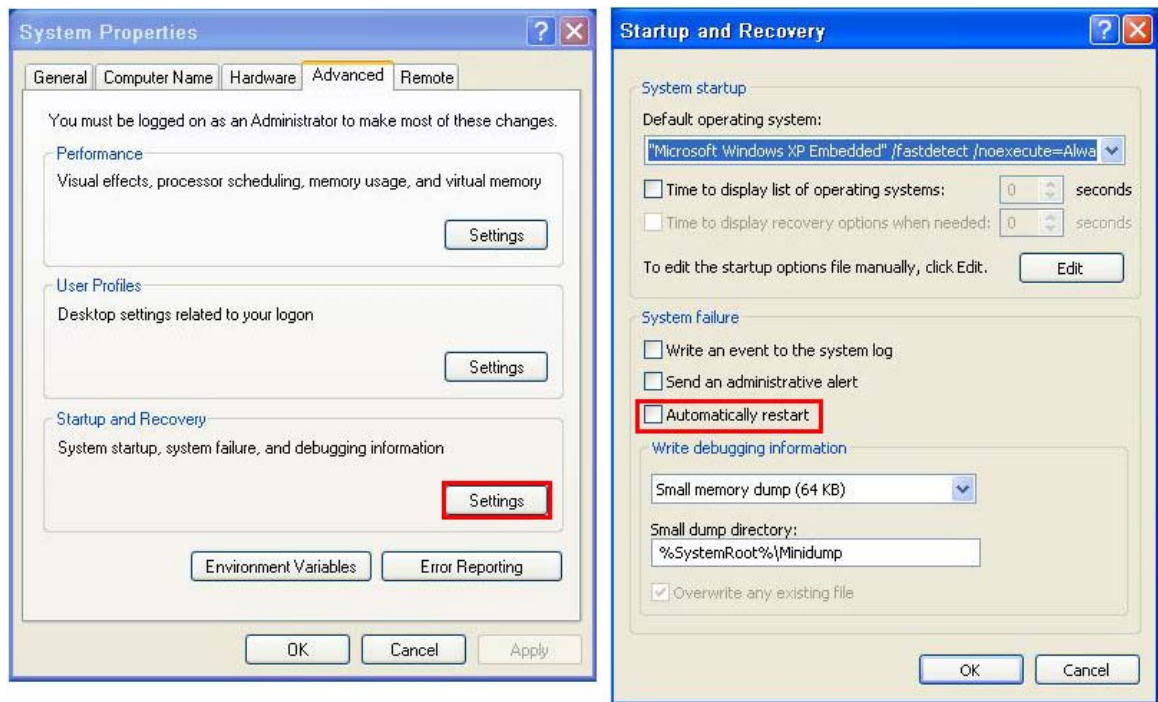


Figure C-23: Disable Automatically Restart

**Step 4:** Reboot the system from the recovery CD. When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!


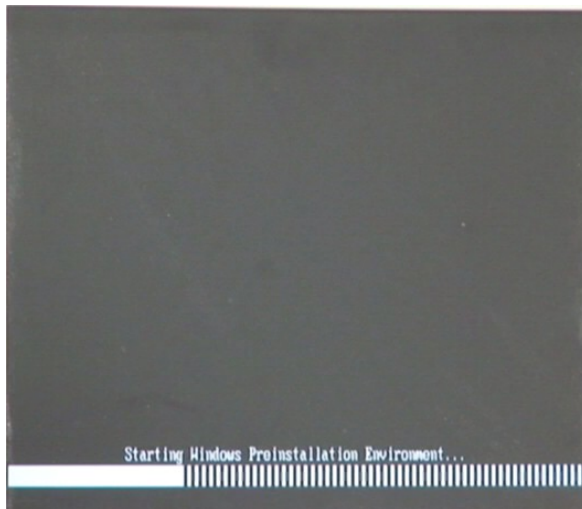



Figure C-24: Launching the Recovery Tool

**Step 5:** When the recovery tool setup menu appears, press <4> then <Enter>.

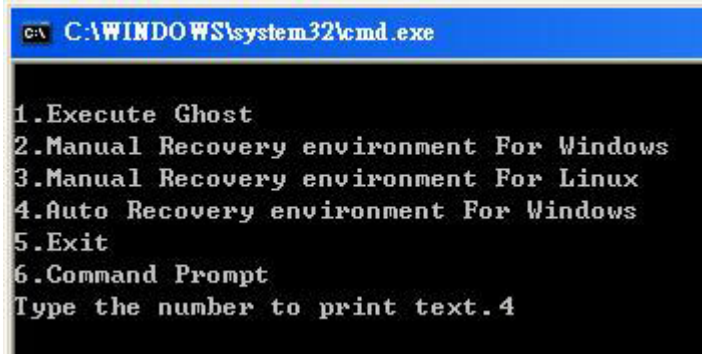

**Figure C-25: Auto Recovery Environment for Windows**

**Step 6:** The Symantec Ghost window appears and starts configuring the system to build an auto recovery partition. In this process the partition created for recovery files in **Section C.2.2** is hidden and the auto recovery tool is saved in this partition.

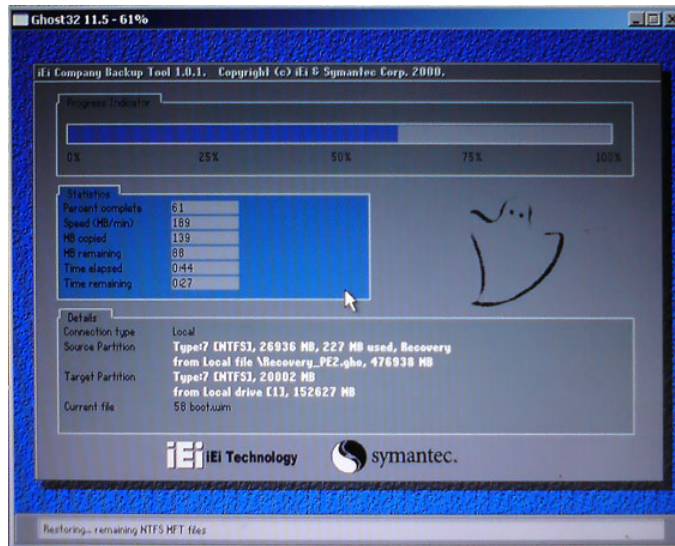


**Figure C-26: Building the Auto Recovery Partition**

**Step 7:** After completing the system configuration, the following message prompts to confirm whether to create a factory default image. Type **Y** to have the system create a factory default image automatically. Type **N** within 6 seconds to skip this




## IMB-H810-i2 microATX Motherboard

process (The default option is YES). It is suggested to choose YES for this option.

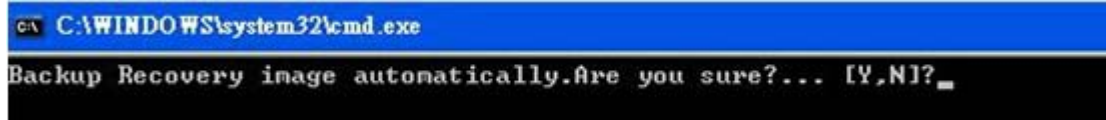


**Figure C-27: Factory Default Image Confirmation**

**Step 8:** The Symantec Ghost starts to create the factory default image (Figure C-28).

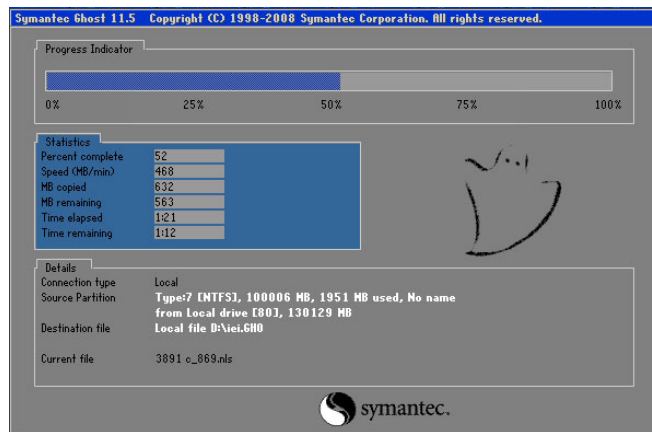

**Figure C-28: Image Creation Complete**

**Step 9:** After completing the system configuration, press any key in the following window to restart the system.

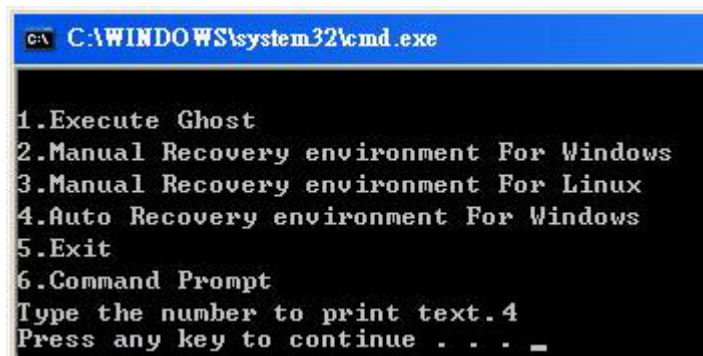


**Figure C-29: Press any key to continue**

**Step 10:** Eject the One Key Recovery CD and restart the system.

**Step 11:** Press the <DELETE> key as soon as the system is turned on to enter the BIOS.

**Step 12:** Enable the Auto Recovery Function option (**Advanced** → **iEi Feature** → **Auto Recovery Function**).

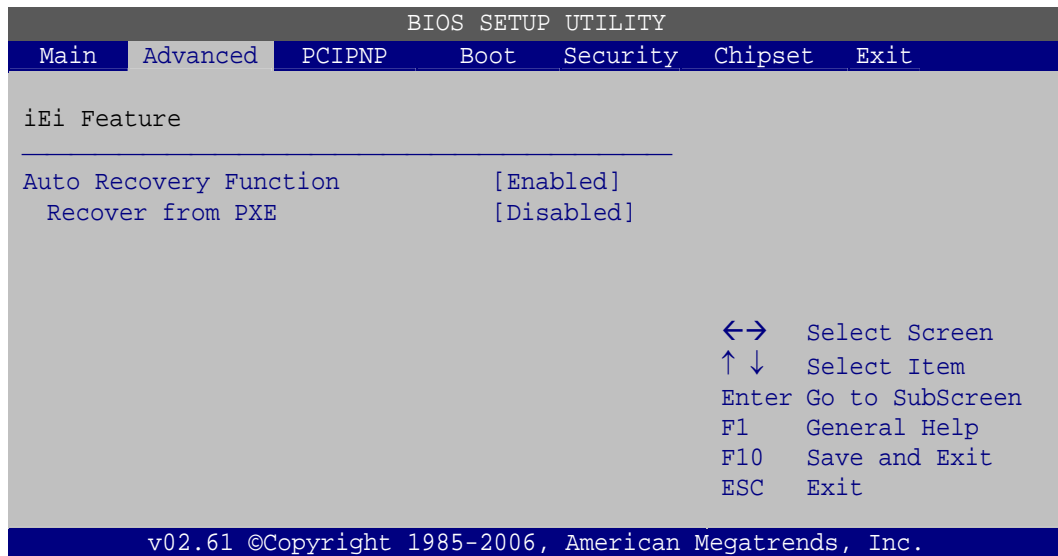

### BIOS Menu 30: IEI Feature

**Step 13:** Save changes and restart the system. If the system encounters a Blue Screen of Death (BSoD) or a hang for around 10 minutes, it will automatically restore from the factory default image.

## C.4 Setup Procedure for Linux

The initial setup procedure for Linux system is mostly the same with the procedure for Microsoft Windows. Please follow the steps below to setup recovery tool for Linux OS.

**Step 1: Hardware and BIOS setup.** Refer to **Section C.2.1**.

**Step 2: Install Linux operating system.** Make sure to install GRUB (v0.97 or earlier) MBR type and Ext3 partition type. Leave enough space on the hard drive to create the recover partition later.



## IMB-H810-i2 microATX Motherboard

**NOTE:**

If the Linux OS is not installed with GRUB (v0.97 or earlier) and Ext3, the Symantec Ghost may not function properly.

While installing Linux OS, please create two partitions:

- Partition 1: /
- Partition 2: **SWAP**

**NOTE:**

Please reserve enough space for partition 3 for saving recovery images.

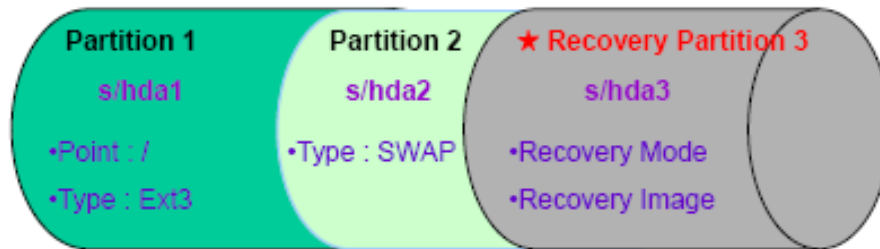


Figure C-30: Partitions for Linux

**Step 3:** Create a recovery partition. Insert the recovery CD into the optical disk drive.


Follow **Step 1 ~ Step 3** described in **Section C.2.2**. Then type the following commands (marked in red) to create a partition for recovery images.

```
system32>diskpart
DISKPART>list vol
DISKPART>sel disk 0
DISKPART>create part pri size= ____
DISKPART>assign letter=N
DISKPART>exit
```

```
system32>format N: /fs:ntfs /q /v:Recovery /y
```

```
system32>exit
```

**Step 4: Build the recovery partition.** Press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient. When the recovery tool setup menu appears, type <3> and press <Enter> (**Figure C-31**). The Symantec Ghost window appears and starts configuring the system to build a recovery partition. After completing the system configuration, press any key to reboot the system. Eject the recovery CD.

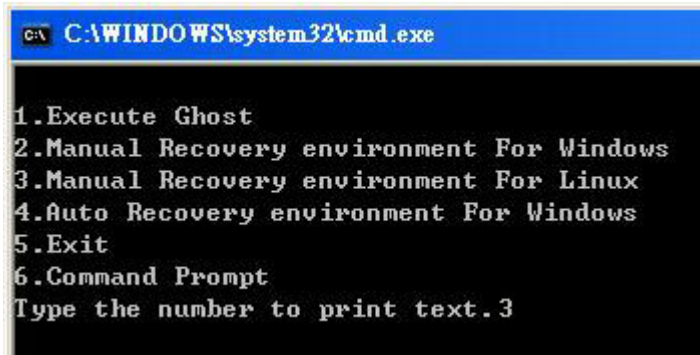

```
C:\WINDOWS\system32\cmd.exe


1.Execute Ghost
2.Manual Recovery environment For Windows
3.Manual Recovery environment For Linux
4.Auto Recovery environment For Windows
5.Exit
6.Command Prompt
Type the number to print text.3
```

Figure C-31: Manual Recovery Environment for Linux

**Step 5: Access the recovery tool main menu by modifying the “menu.lst”.** To first access the recovery tool main menu, the menu.lst must be modified. In Linux, enter Administrator (root). When prompt appears, type:

```
cd /boot/grub
```

```
vi menu.lst
```

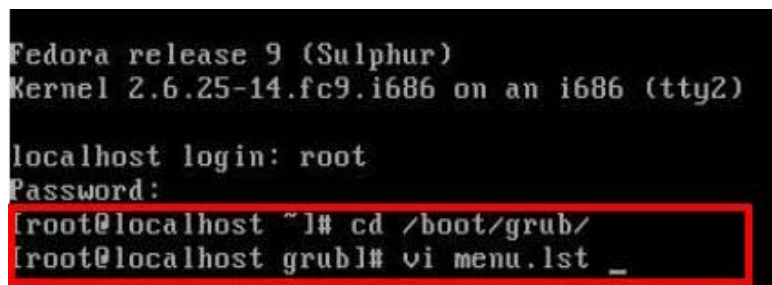

```
Fedora release 9 (Sulphur)
Kernel 2.6.25-14.fc9.i686 on an i686 (tty2)

localhost login: root
Password:
[root@localhost ~]# cd /boot/grub/
[root@localhost grub]# vi menu.lst _
```

Figure C-32: Access menu.lst in Linux (Text Mode)

## IMB-H810-i2 microATX Motherboard

**Step 6:** Modify the menu.lst as shown below.

```
#boot=/dev/sda
default=0
timeout=10 ← Modify timeout=10
splashimage=(hd0,0)/grub/splash.xpm.gz
hiddenmenu
title Fedora (2.6.25-14.fc9.i686)
    root (hd0,0)
    kernel /vmlinuz-2.6.25-14.fc9.i686 ro root=UUID=10f1acd
ac38b5c78910 rhgb quiet
    initrd /initrd-2.6.25-14.fc9.i686.img

title Recovery Partition
root (hd0,2)
makeactive ← Type command
chainloader +1
```

- Type command:  
**title Recovery Partition**  
**root (hd0,2)**  
**makeactive**  
**chainloader +1**

**Step 7:** The recovery tool menu appears. (Figure C-33)

```
1. Factory Restore
2. Backup system
3. Restore your last backup.
4. Manual
5. Quit
Please type the number to select and then press Enter:
```

Figure C-33: Recovery Tool Menu

**Step 8:** Create a factory default image. Follow **Step 2 ~ Step 12** described in **Section C.2.5** to create a factory default image.

## C.5 Recovery Tool Functions

After completing the initial setup procedures as described above, users can access the recovery tool by pressing <F3> while booting up the system. However, if the setup procedure in Section C.3 has been completed and the auto recovery function is enabled, the system will automatically restore from the factory default image without pressing the F3 key. The recovery tool main menu is shown below.

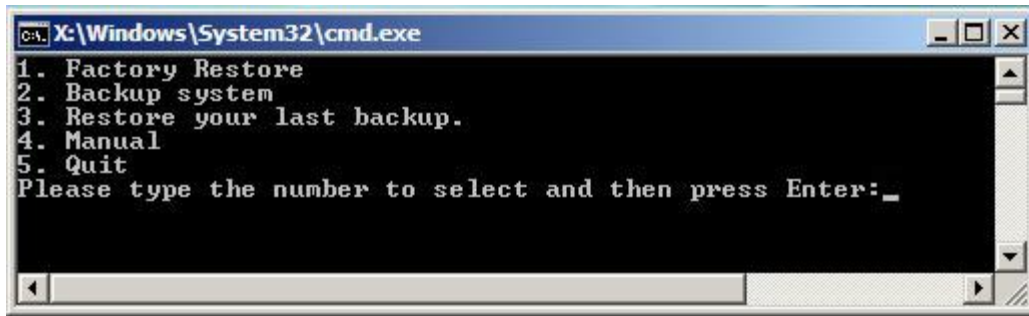


Figure C-34: Recovery Tool Main Menu

The recovery tool has several functions including:

1. **Factory Restore:** Restore the factory default image (iei.GHO) created in Section C.2.5.
2. **Backup system:** Create a system backup image (iei\_user.GHO) which will be saved in the hidden partition.
3. **Restore your last backup:** Restore the last system backup image
4. **Manual:** Enter the Symantec Ghost window to configure manually.
5. **Quit:** Exit the recovery tool and restart the system.



**WARNING:**

Please do not turn off the system power during the process of system recovery or backup.



**WARNING:**

All data in the system will be deleted during the system recovery. Please backup the system files before restoring the system (either Factory Restore or Restore Backup).



## IMB-H810-i2 microATX Motherboard

### C.5.1 Factory Restore

To restore the factory default image, please follow the steps below.

**Step 1:** Type <1> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears and starts to restore the factory default. A factory default image called **iei.GHO** is created in the hidden Recovery partition.

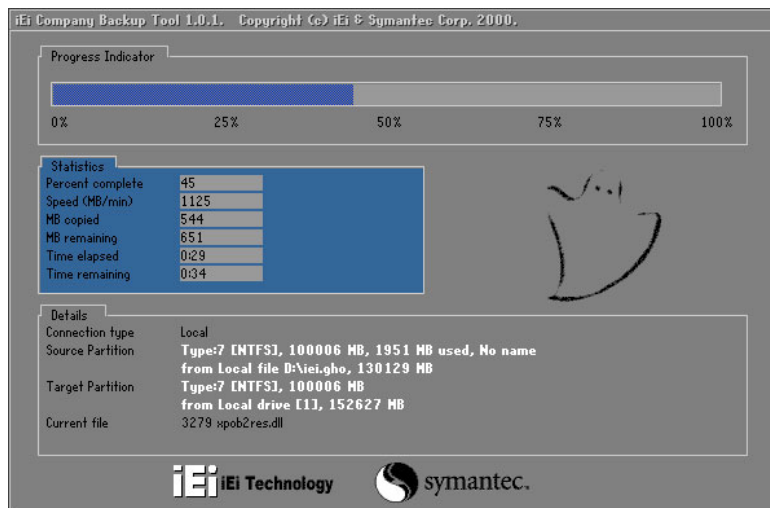


Figure C-35: Restore Factory Default

**Step 3:** The screen shown in **Figure C-36** appears when completed. Press any key to reboot the system.

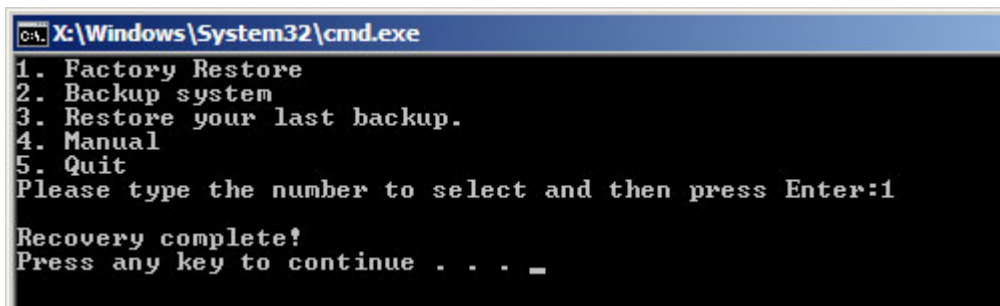


Figure C-36: Recovery Complete Window




### C.5.2 Backup System

To backup the system, please follow the steps below.

**Step 1:** Type <2> and press <Enter> in the main menu.


**Step 2:** The Symantec Ghost window appears and starts to backup the system. A backup image called **iei\_user.GHO** is created in the hidden Recovery partition.

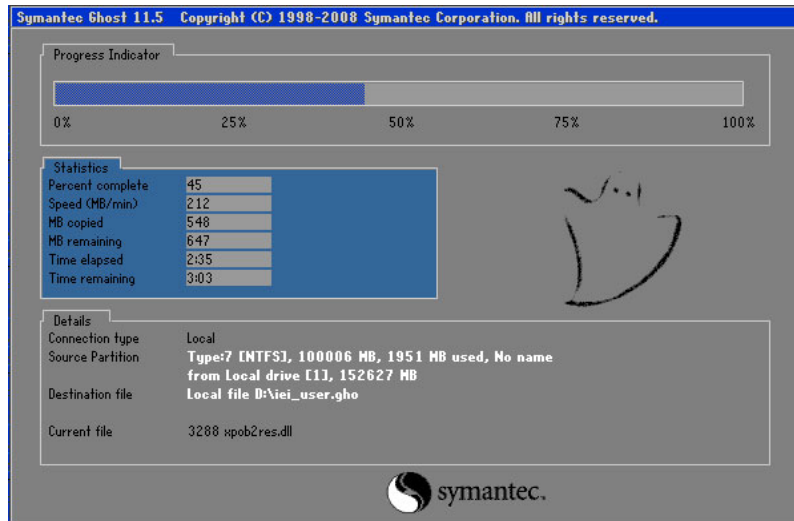

**Figure C-37: Backup System**

**Step 3:** The screen shown in **Figure C-38** appears when system backup is complete.

Press any key to reboot the system.

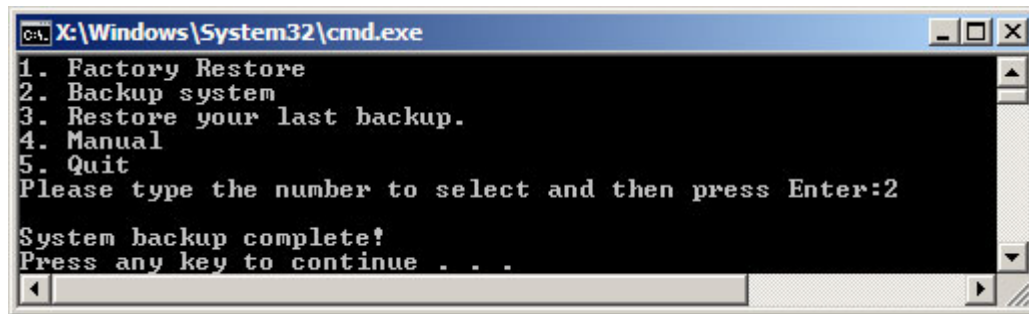

**Figure C-38: System Backup Complete Window**

## IMB-H810-i2 microATX Motherboard

### C.5.3 Restore Your Last Backup

To restore the last system backup, please follow the steps below.

**Step 1:** Type <3> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears and starts to restore the last backup image (iei\_user.GHO).

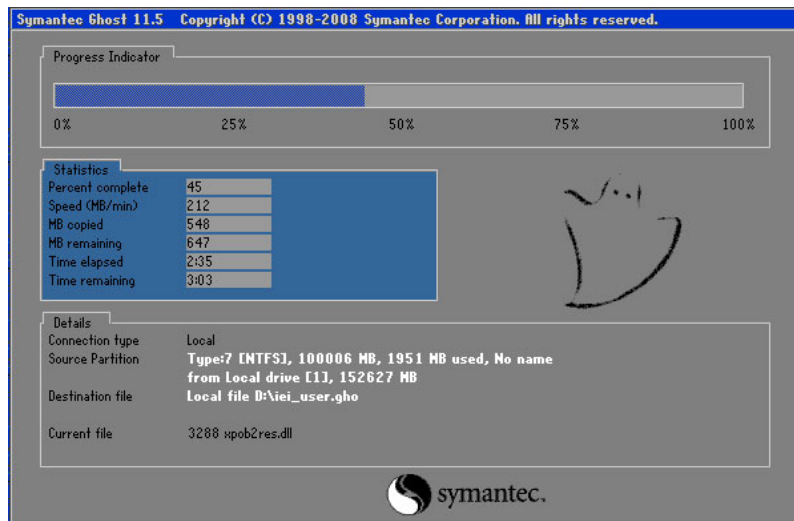


Figure C-39: Restore Backup

**Step 3:** The screen shown in **Figure C-40** appears when backup recovery is complete. Press any key to reboot the system.

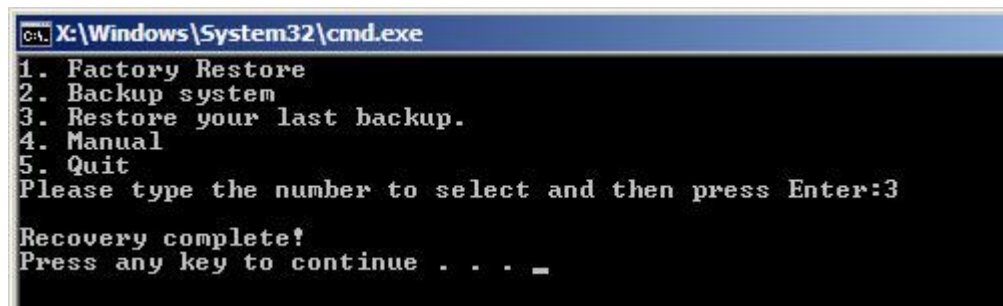



Figure C-40: Restore System Backup Complete Window

### C.5.4 Manual

To restore the last system backup, please follow the steps below.

**Step 1:** Type <4> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears. Use the Ghost program to backup or recover the system manually.

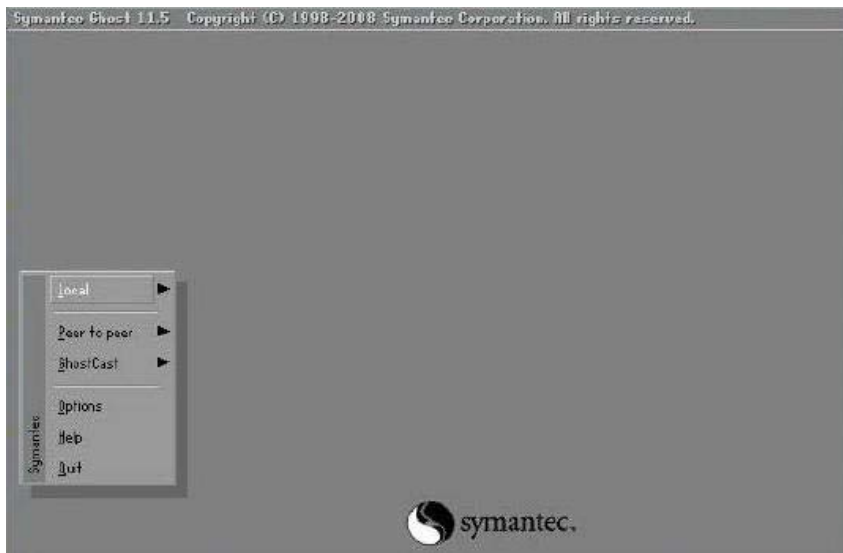


**Figure C-41: Symantec Ghost Window**

**Step 3:** When backup or recovery is completed, press any key to reboot the system.

## C.6 Restore Systems from a Linux Server through LAN

The One Key Recovery allows a client system to automatically restore to a factory default image saved in a Linux system (the server) through LAN connectivity after encountering a Blue Screen of Death (BSOD) or a hang for around 10 minutes. To be able to use this function, the client system and the Linux system MUST reside in the same domain.

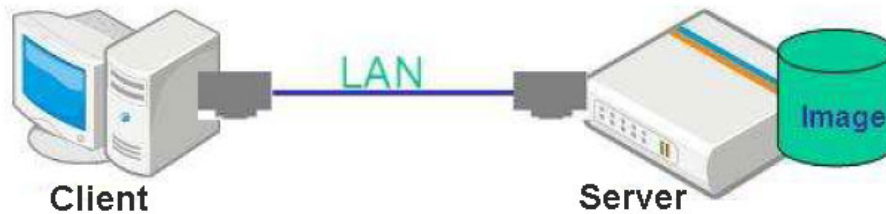

### CAUTION:

The supported client OS includes:

- Windows 2000
- Windows XP
- Windows Vista
- Windows 7
- Windows XP Embedded
- Windows Embedded Standard 7

Prior to restoring client systems from a Linux server, a few setup procedures are required.

**Step 1:** Configure DHCP server settings

**Step 2:** Configure TFTP settings

**Step 3:** Configure One Key Recovery server settings

**Step 4:** Start DHCP, TFTP and HTTP

**Step 5:** Create a shared directory

**Step 6:** Setup a client system for auto recovery



The detailed descriptions are described in the following sections. In this document, two types of Linux OS are used as examples to explain the configuration process – CentOS 5.5 (Kernel 2.6.18) and Debian 5.0.7 (Kernel 2.6.26).

### C.6.1 Configure DHCP Server Settings

**Step 1:** Install the DHCP

`#yum install dhcp` (CentOS, commands marked in red)

`#apt-get install dhcp3-server` (Debian, commands marked in blue)

**Step 2:** Confirm the operating system default settings: dhcpd.conf.

#### CentOS

Use the following command to show the DHCP server sample location:

`#vi /etc/dhcpd.conf`

The DHCP server sample location is shown as below:

```
# DHCP Server Configuration file.
# see /usr/share/doc/dhcp*/dhcpd.conf.sample
```

Use the following command to copy the DHCP server sample to etc/dhcpd.conf:

`#cp /usr/share/doc/dhcp-3.0.5/dhcpd.conf.sample /etc/dhcpd.conf`

`#vi /etc/dhcpd.conf`

```
ddns-update-style interim;
ignore client-updates;

subnet 192.168.0.0 netmask 255.255.255.0 {
# --- default gateway
    option routers                192.168.0.2;
    option subnet-mask            255.255.255.0;

    option nis-domain             "domain.org";
    option domain-name            "domain.org";
    option domain-name-servers   192.168.0.1;
    next-server 192.168.0.6;
    filename "pxelinux.0";
    option time-offset            -18000; # Eastern Standard Time
    option ntp-servers            192.168.1.1;
}
```

#### Debian

`#vi /etc/dhcpd.conf`



## IMB-H810-i2 microATX Motherboard

Edit “/etc/dhcpd.conf” for your environment. For example, add

`next-server PXE server IP address;`

`filename “pxelinux.0”;`

```
ddns-update-style interim;
ignore client-updates;

subnet 192.168.0.0 netmask 255.255.255.0 {
# --- default gateway
    option routers                192.168.0.2;
    option subnet-mask            255.255.255.0;

    option nis-domain             "domain.org";
    option domain-name            "domain.org";
    option domain-name-servers   192.168.0.1;
    next-server 192.168.0.6;
    filename "pxelinux.0";
    option time-offset            -18000; # Eastern Standard Time
    option ntp-servers            192.168.1.1;
}
```

### C.6.2 Configure TFTP Settings

**Step 1:** Install the tftp, httpd and syslinux.

`#yum install tftp-server httpd syslinux` (CentOS)

`#apt-get install tftpd-hpa xinetd syslinux` (Debian)

**Step 2:** Enable the TFTP server by editing the “/etc/xinetd.d/tftp” file and make it use the remap file. The “-vvv” is optional but it could definitely help on getting more information while running the remap file. For example:

#### CentOS

`#vi /etc/xinetd.d/tftp`

Modify:

`disable = no`

`server_args = -s /tftpboot -m /tftpboot/tftpd.remap -vvv_`

```

socket_type      = dgram
protocol         = udp
wait             = yes
user             = root
server           = /usr/sbin/in.tftpd
server_args      = -s /tftpboot -m /tftpboot/tftpd.remap -vvv
disable          = no
per_source       = 11
cps              = 100 2
flags            = IPv4
    
```

**Debian**

Replace the TFTP settings from “inetd” to “xinetd” and annotate the “inetd” by adding “#”.

[#vi /etc/inetd.conf](#)

Modify: #tftp dgram udp wait root /usr/sbin..... (as shown below)

```

#:BOOT: TFTP service is provided primarily for booting. Most sites
#      run this only on machines acting as "boot servers."

#tftp      dgram  udp    wait   root   /usr/sbin/in.tftpd /usr/sbin/in.tftpd -s
          /var/lib/tftpboot
    
```

[#vi /etc/xinetd.d/tftp](#)

```

socket_type      = dgram
protocol         = udp
wait             = yes
user             = root
server           = /usr/sbin/in.tftpd
server_args      = -s /tftpboot -m /tftpboot/tftpd.remap -vvv
disable          = no
per_source       = 11
cps              = 100 2
flags            = IPv4
    
```

**C.6.3 Configure One Key Recovery Server Settings**

**Step 1:** Copy the **Utility/RECOVERYR10.TAR.BZ2** package from the One Key Recovery CD to the system (server side).



## IMB-H810-i2 microATX Motherboard

**Step 2:** Extract the recovery package to /.

```
#cp RecoveryR10.tar.bz2 /  
#cd /  
#tar -xvzf RecoveryR10.tar.bz2
```

**Step 3:** Copy “pxelinux.0” from “syslinux” and install to “tftpboot”.

```
#cp /usr/lib/syslinux/pxelinux.0 /tftpboot/
```

### C.6.4 Start the DHCP, TFTP and HTTP

Start the DHCP, TFTP and HTTP. For example:

#### CentOS

```
#service xinetd restart
```

```
#service httpd restart
```

```
#service dhcpd restart
```

#### Debian

```
#/etc/init.d/xinetd reload
```

```
#/etc/init.d/xinetd restart
```

```
#/etc/init.d/dhcp3-server restart
```

### C.6.5 Create Shared Directory

**Step 1:** Install the samba.

```
#yum install samba
```

**Step 2:** Create a shared directory for the factory default image.

```
#mkdir /share  
#cd /share  
#mkdir /image  
#cp iei.gho /image
```

**WARNING:**

The file name of the factory default image must be **iei.gho**.

**Step 3:** Confirm the operating system default settings: smb.conf.

```
#vi /etc/samba/smb.conf
```

Modify:

```
[image]
```

```
comment = One Key Recovery
```

```
path = /share/image
```

```
browseable = yes
```

```
writable = yes
```

```
public = yes
```

```
create mask = 0644
```

```
directory mask = 0755
```

**Step 4:** Edit “/etc/samba/smb.conf” for your environment. For example:

```
# "security = user" is always a good idea. This will require a Unix account
# in this server for every user accessing the server. See
# /usr/share/doc/samba-doc/html/docs/Samba3-HOWTO/ServerType.html
# in the samba-doc package for details.
security = share
```

```
[image]
comment = One Key Recovery
path = /share/image
browseable = yes
writable = yes
public = yes
create mask = 0644
directory mask = 0755
```

**Step 5:** Modify the hostname

```
#vi /etc/hostname
```

Modify: RecoveryServer


```
RecoveryServer
```



## IMB-H810-i2 microATX Motherboard

## C.6.6 Setup a Client System for Auto Recovery

**Step 1:** Disable the automatically restart function before creating the factory default image. Go to: My Computer → Properties → Advanced. Click the Settings button of Startup and Recovery. Deselect “Automatically restart”. Click OK to save the settings and exit. (See Figure C-23)

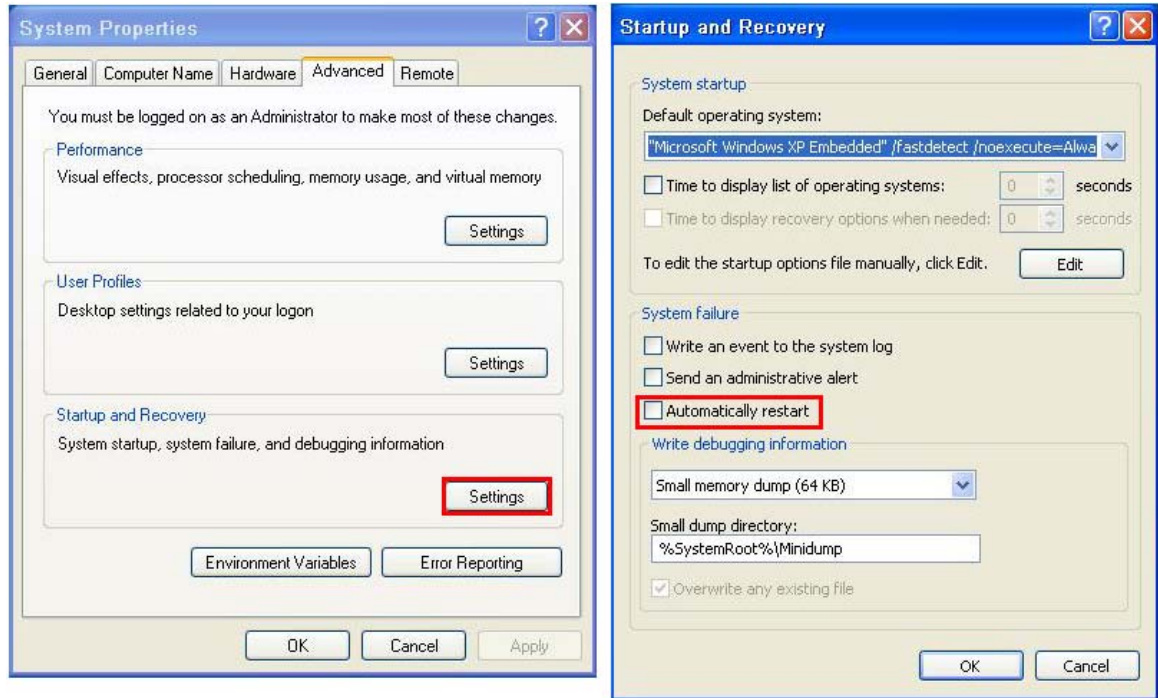

**Figure C-42: Disable Automatically Restart**

**Step 2:** Configure the following BIOS options of the client system.

Advanced → iEi Feature → Auto Recovery Function → **Enabled**

Advanced → iEi Feature → Recover from PXE → **Enabled**

Boot → Launch PXE OpROM → **Enabled**

**Step 3:** Continue to configure the **Boot Option Priorities** BIOS option of the client system:



Boot Option #1 → remain the default setting to boot from the original OS.

Boot Option #2 → select the boot from LAN option.

**Step 4:** Save changes and exit BIOS menu.

Exit → **Save Changes and Exit**

**Step 5:** Install the auto recovery utility into the system by double clicking the **Utility/AUTORECOVERY-SETUP.exe** in the One Key Recovery CD. This utility **MUST** be installed in the system, otherwise, the system will automatically restore from the factory default image every ten (10) minutes.



**Step 6:** Restart the client system from LAN. If the system encounters a Blue Screen of Death (BSoD) or a hang for around 10 minutes, it will automatically restore from the factory default image. The following screens will show when the system starts auto recovering.


```
Realtek PCIe GBE Family Controller Series v2.35 (06/14/10)
CLIENT MAC ADDR: 00 18 7D 13 E6 89  GUID: 00020003-0004-0005-0006-0007000000
DHCP . ./
```

```
My IP address seems to be C0A80009 192.168.0.9
ip=192.168.0.9:192.168.0.8:192.168.0.2:255.255.255.0
TFTP prefix:
Trying to load: pxelinux.cfg/00020003-0004-0005-0006-000700000009
Trying to load: pxelinux.cfg/01-00-18-7d-13-e6-89
Trying to load: pxelinux.cfg/C0A80009
Trying to load: pxelinux.cfg/C0A8000
Trying to load: pxelinux.cfg/C0A800
Trying to load: pxelinux.cfg/C0A80
Trying to load: pxelinux.cfg/C0A8
Trying to load: pxelinux.cfg/C0A
Trying to load: pxelinux.cfg/C0
Trying to load: pxelinux.cfg/C
Trying to load: pxelinux.cfg/default
boot:
```

## IMB-H810-i2 microATX Motherboard

Windows is loading files...

IP: 192.168.0.8, File: \Boot\WinPE.wim

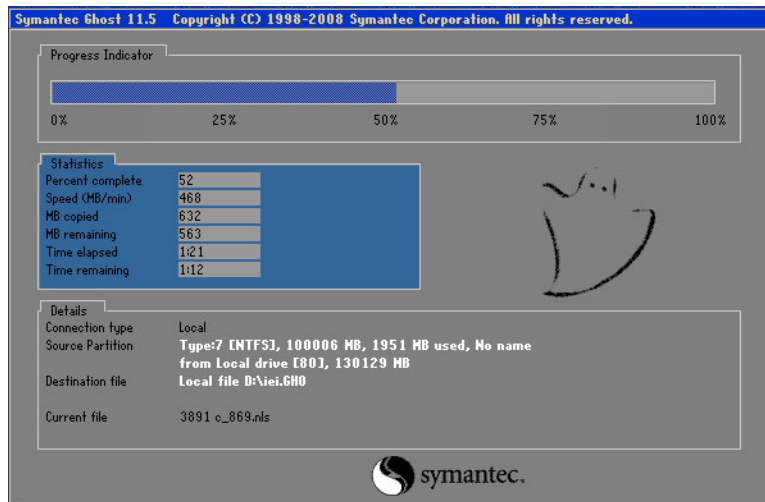**NOTE:**

A firewall or a SELinux is not in use in the whole setup process described above. If there is a firewall or a SELinux protecting the system, modify the configuration information to accommodate them.

## C.7 Other Information

### C.7.1 Using AHCI Mode or ALi M5283 / VIA VT6421A Controller


When the system uses AHCI mode or some specific SATA controllers such as ALi M5283 or VIA VT6421A, the SATA RAID/AHCI driver must be installed before using one key recovery. Please follow the steps below to install the SATA RAID/AHCI driver.

**Step 1:** Copy the SATA RAID/AHCI driver to a floppy disk and insert the floppy disk into a USB floppy disk drive. The SATA RAID/AHCI driver must be especially designed for the on-board SATA controller.

**Step 2:** Connect the USB floppy disk drive to the system.

**Step 3:** Insert the One Key Recovery CD into the system and boot the system from the CD.

**Step 4:** When launching the recovery tool, press <F6>.

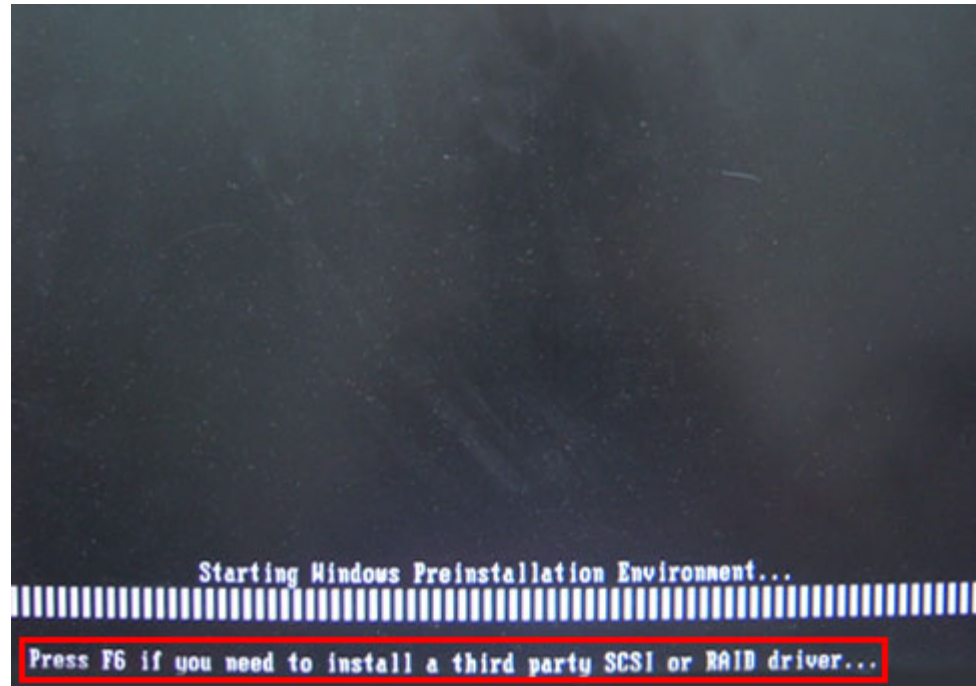

**Step 5:** When the following window appears, press <S> to select "Specify Additional Device".



## IMB-H810-i2 microATX Motherboard

Setup could not determine the type of one or more mass storage devices installed in your system, or you have chosen to manually specify an adapter. Currently, Setup will load support for the following mass storage device(s):

<none>

- To specify additional SCSI adapters, CD-ROM drives, or special disk controllers for use with Windows, including those for which you have a device support disk from a mass storage device manufacturer, press S.
- If you do not have any device support disks from a mass storage device manufacturer, or do not want to specify additional mass storage devices for use with Windows, press ENTER.

**S=Specify Additional Device**    **ENTER=Continue**    **F3=Exit**

**Step 6:** In the following window, select a SATA controller mode used in the system. Then press <Enter>. The user can now start using the SATA HDD.

You have chosen to configure a SCSI Adapter for use with Windows, using a device support disk provided by an adapter manufacturer.

Select the SCSI Adapter you want from the following list, or press ESC to return to the previous screen.

VIA U-RAID Controller Series(Windows XP/SRU2003)  
VIA U-RAID Controller Series(Windows XP/SRU2003-x64)  
VIA U-RAID Controller Series(Windows 2K)  
VIA U-RAID Controller Series(Windows NT4)

**ENTER=Select**    **F3=Exit**

**Step 7:** After pressing <Enter>, the system will get into the recovery tool setup menu.

Continue to follow the setup procedure from **Step 4** in **Section C.2.2 Create**

**Partitions** to finish the whole setup process.

### C.7.2 System Memory Requirement

To be able to access the recovery tool by pressing <F3> while booting up the system, please make sure to have enough system memory. The minimum memory requirement is listed below.

- **Using Award BIOS:** 128 MB system memory
- **Using AMI BIOS:** 512 MB system memory.



Appendix

**D**

# Watchdog Timer

---



**NOTE:**

The following discussion applies to DOS environment. Contact IEI support or visit the IEI website for specific drivers for other operating systems.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer’s period.
BL:	Time-out value (Its unit-second is dependent on the item “Watchdog Timer unit select” in CMOS setup).

**Table D-1: AH-6FH Sub-function**

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

## IMB-H810-i2 microATX Motherboard

**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

**EXAMPLE PROGRAM:**

**; INITIAL TIMER PERIOD COUNTER**

;

**W\_LOOP:**

;

```

MOV     AX, 6F02H      ;setting the time-out value
MOV     BL, 30         ;time-out value is 48 seconds
INT     15H

```

;

**; ADD THE APPLICATION PROGRAM HERE**

;

```

CMP     EXIT_AP, 1     ;is the application over?
JNE     W_LOOP         ;No, restart the application

```

```

MOV     AX, 6F02H      ;disable Watchdog Timer
MOV     BL, 0          ;
INT     15H

```

;

**; EXIT ;**

Appendix

**E**

# Hazardous Materials Disclosure

---

## **E.1 Hazardous Materials Disclosure Table for IPB Products Certified as RoHS Compliant Under 2002/95/EC Without Mercury**

The details provided in this appendix are to ensure that the product is compliant with the Peoples Republic of China (China) RoHS standards. The table below acknowledges the presences of small quantities of certain materials in the product, and is applicable to China RoHS only.

A label will be placed on each product to indicate the estimated “Environmentally Friendly Use Period” (EFUP). This is an estimate of the number of years that these substances would “not leak out or undergo abrupt change.” This product may contain replaceable sub-assemblies/components which have a shorter EFUP such as batteries and lamps. These components will be separately marked.

Please refer to the table on the next page.



Part Name	Toxic or Hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
<b>Housing</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Display</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Printed Circuit Board</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Metal Fasteners</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Cable Assembly</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Fan Assembly</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Power Supply Assemblies</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
<b>Battery</b>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in SJ/T11363-2006

X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in SJ/T11363-2006

## IMB-H810-i2 microATX Motherboard

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯 醚 (PBDE)
壳体	○	○	○	○	○	○
显示	○	○	○	○	○	○
印刷电路板	○	○	○	○	○	○
金属螺帽	○	○	○	○	○	○
电缆组装	○	○	○	○	○	○
风扇组装	○	○	○	○	○	○
电力供应组装	○	○	○	○	○	○
电池	○	○	○	○	○	○

○: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。  
X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。