


# 1U AC Input ATX Type

## ACE-A630B 1U Flex ATX 300 W Power Supply



### Dimensions (Unit: mm)

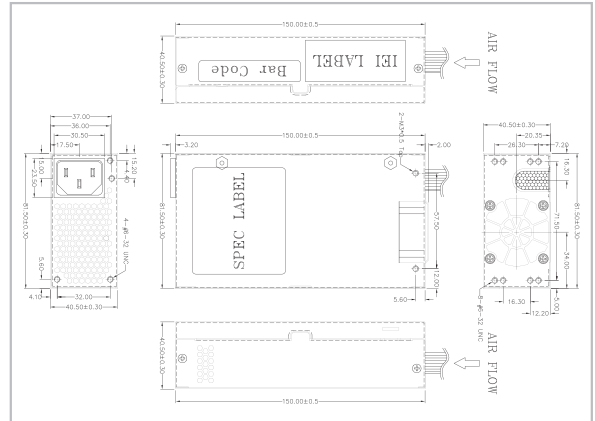

### Specifications

Input Type	90~264VAC Full Range				
Output Voltage	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb
	16 A (0.5 A min.)	18 A (0.5 A min.)	15 A (0.5 A min.)	0.5 A	3 A
Efficiency	82%				
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C				
MTBF (hrs)	100,000				
Output Connector	20+4-pin ATX, 4-pin 12V CPU, 1x FDD, 2 x HDD, 2 xSATA				
Dimensions (mm)	150 x 81.5 x 40.5				


### Ordering Information

Part No.	Description
ACE-A630B-RS-R10	1U Flex ATX 300W Power Supply, 90~264 VAC, ErP, CCL, RoHS

## ACE-A627A 270 W 1U Type ATX Power Supply



### Dimensions (Unit: mm)

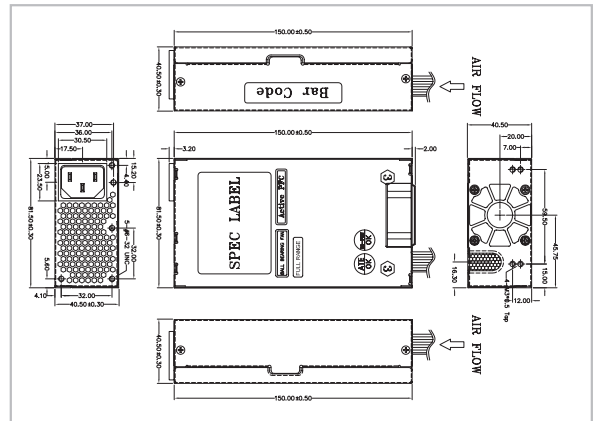

### Specifications

Input Type	90~264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	16 A (0.5 A min.)	18 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80%					
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
MTBF (hrs)	100,000					
Output Connector	20-pin ATX, 4-pin 12 V, FDD and three HDD					
Dimensions (mm)	150 x 81.5 x 40.5					

### Ordering Information

Part No.	Description
ACE-A627A-RS-R11	270W AC-DC 1U flex ATX Power Supply, with PFC/ ErP, meets 80 PLUS

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Industrial Computer Chassis

4

Open Frame Monitor

5

Power Supply/ Peripherals

6

All-in-One System