




## Introduction

The **TGXPS-1080-M12-24V series** is an un-managed PoE Ethernet switch with 8x10/100/500/1000Base-T(X) P.S.E. ports, specifically designed for the toughest environment and fully compliant with EN50155 requirement. The P.S.E ports enable the **TGXPS-1080-M12-24V series** to transmit electrical power, along with data, to remote devices over a standard twisted-pair cable. With EN50155 compliance and M12 connectors, the device ensures reliable and robust connections against environmental disturbances, such as vibration and shock. In addition, the wide operating temperature range from -40°C to 75°C allows the device to operate in extreme weather. The -BP2 model also provides two sets of bypass ports that ensure constant network connectivity during power failure. Even if the switch loses power, traffic will continue to flow unimpeded through the link.

## Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TGXPS-1080-M12-24V or TGXPS-1080-M12-BP2-24V		1
CD		1
QIG		1


## Preparation

Before you begin installing the device, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.


### Safety & Warnings

-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T<sub>ma</sub>) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

### Dimension Unit =mm (Tolerance ±0.5mm)

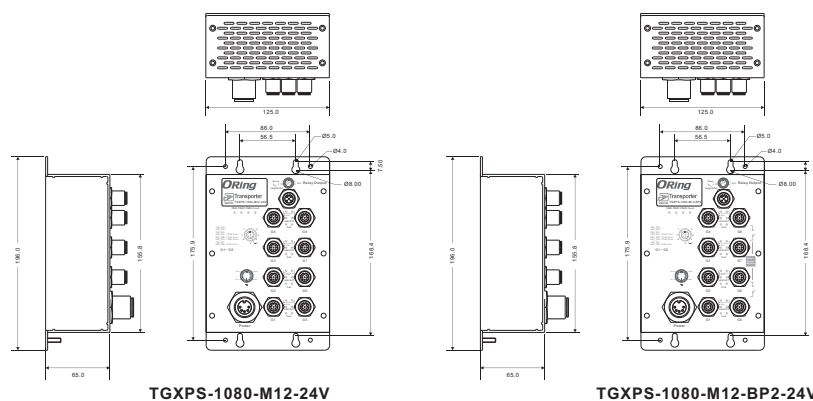

### Panel Layouts

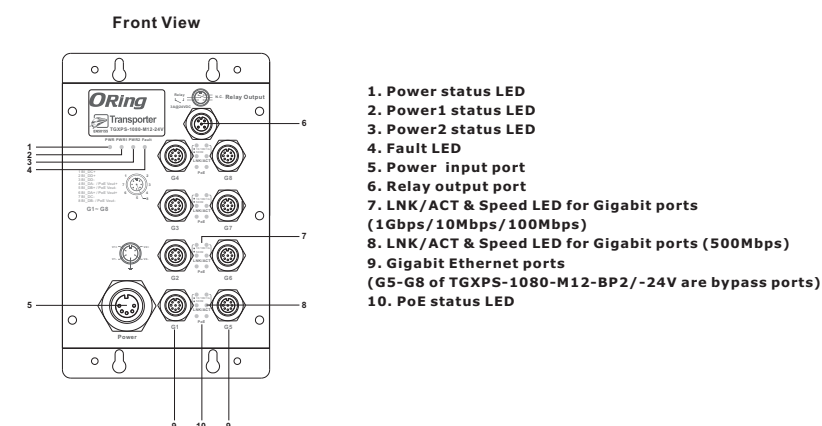

## Installation


### Wall-mount

The device can be fixed to the wall. Follow the steps below to install the device on the wall.

**Step 1:** Hold the device upright against the wall

**Step 2:** Insert four screws through the large opening of the keyhole-shaped apertures at the top and bottom of the unit and fasten the screw to the wall with a screwdriver.

**Step 3:** Slide the device downwards and tighten the four screws for added stability.



Instead of screwing the screws in all the way, it is advised to leave a space of about 2mm to allow room for sliding the switch between the wall and the screws.

### Wiring

For pin assignments of power, console and relay output ports, please refer to the following tables.

### Grounding

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

### Power port pinouts

The device supports two sets of power supplies and uses the M23 5-pin female connector on the front panel for the dual power inputs. **Step 1:** Insert a power cable to the power connector on the device. **Step 2:** Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



### Relay output port pinouts

The switch uses the M12 A-coded 5-pin male connector on the front panel for relay output. Use a power cord with an M12 A-coded 5-pin female connector to connect the relay. The relay contacts will detect user-configured events and form an open circuit when an event is triggered.



### Network Connection

The device provides Ethernet ports in M12 connector type. According to the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to any other network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.


Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	M12 A-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector
1000BASE-T	Cat. 5/Cat. 5e 100-ohm UTP	UTP 100 m (328ft)	M12 A-coding connector

For pin assignments of the LAN ports, please refer to the following tables.



10/100/1000Base-T(X) M12 port	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA- / PoE Vout+
5	BI_DB+ / PoE Vout-
6	BI_DA+ / PoE Vout+
7	BI_DC-
8	BI_DB- / PoE Vout-

### PoE Power Distribution

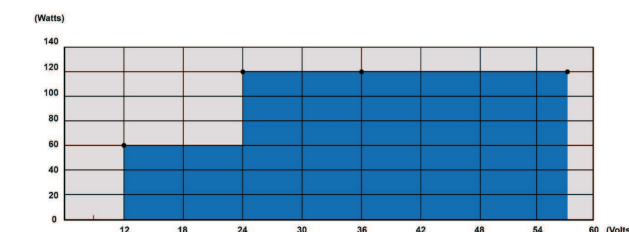

## Configurations

After installing the switch and connecting cables, start the device by turning on power. The green power LED should turn on. Please refer to the following tablet for LED indication.

LED	Color	Status	Description
PWR	Green	On	Power is enabled
PWR1	Green	On	DC power module 1 activated
PWR2	Green	On	DC power module 2 activated
Fault	Amber	On	Power 1 or Power 2 module failure
10/100/500/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port is linked
Speed (Upper LED)	Green	On	Port is running at 1Gbps
	Amber	On	Port is running at 10/100 Mbps
Speed (Lower LED)	Amber	On	Port is running at 500Mbps
PoE	Blue	On	PoE power is enabled

## Specifications

ORing Switch Model	TGXPS-1080-M12-24V	TGXPS-1080-M12-BP2-24V
<b>Physical Ports</b>		
10/100/500/1000Base-T(X) Ports in M12 With P.S.E.	8 x M12 connector (8 pin A-coding)	8 x M12 connector (8-pin A-coding, bypass function included on port5~8)
<b>Technology</b>		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3at compliant PoE specification (Maximum 30Watts per port)	
MAC Table	4K MAC addresses	
Processing	Store-and-Forward	
<b>LED indicators</b>		
Power Indicator	Green : Power LED x 3	
Fault Indicator	Amber : Indicate PWR1 or PWR2 failure	
10/100/500/1000Base-T(X) M12 port indicator and PoE indicator	Top for 10/100/1000Mbps port Link/Act indicator. Green for 1Gbps link, Amber for 10/100 Mbps link Middle Amber for 500Mbps port Link/Act indicator Bottom blue for PoE Injected indicator	
<b>Fault Contact</b>		
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin M12 A-coding)	
<b>Power</b>		
Redundant Input Power	Dual DC inputs. 24 (12~57VDC) VDC on 5-pin M23 connector	
Power Consumption(Typ.)	8 Watts (power consumption of P.S.E. is not included)	
PoE Output Power	60 Watts (12~24VDC)/ 120 Watts (24~57VDC)	
Overload Current Protection	Present	
Reverse Polarity Protection	Present	
<b>Physical Characteristic</b>		
Enclosure	IP-30	
Dimension (W x D x H)	125(W) x 65(D) x 196(H) mm (4.92 x 2.56 x 7.66 inch.)	
Weight (g)	979 g	1001 g
<b>Environmental</b>		
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Operating Temperature	-40 to 75°C (-40 to 167°F)	
Operating Humidity	5% to 95% Non-condensing	

Regulatory Approvals	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15B, EN 50121-3-2 (EN 50155)
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8 (PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN 60950-1
Other	EN 50155
MTBF	442602 hrs
Warranty	5 years

Copyright© 2018 ORing  
All rights reserved.



**ORing Industrial Networking Corp.**

TEL: +886-2-2218-1066 Website: www.oringnet.com  
FAX: +886-2-2218-1014 E-mail: support@oringnet.com