


IDD-9364120A


120 W DC/DC Converter Module

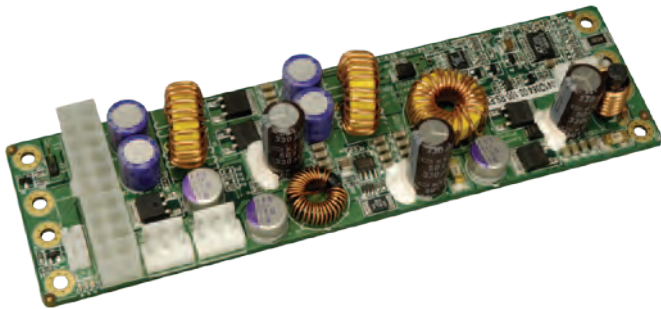

Features


1. Wide input range: 9-36 VDC
2. AT or ATX mode on/off
3. Output voltage protection
4. Up to 90% efficiency
5. RoHS compliant
6. Compact size

Dimensions (Unit: mm)

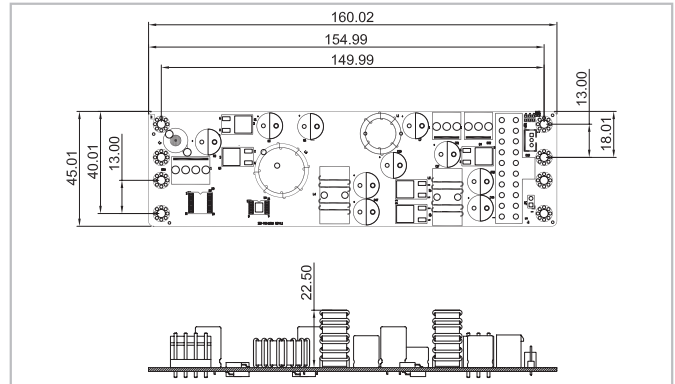

Specifications

- Output (max.): 12 V@4 A, 5 V@10 A, 3.3 V@8 A, -12 V@0.3 A & 5 VSB@2 A
Max. total output: 120 W
- Input: 9 VDC to 36 VDC
- Performance characteristics
Noise & ripple: <240 mV
Line regulation: <50 mV
Load regulation: <100 mV
Efficiency: Up to 90%
- Dimensions: 45 mm x 160 mm
- Weight: NW: 104 g
- Operating temperature: -20°C ~ 70°C
- Storage temperature: -25°C ~ 75°C

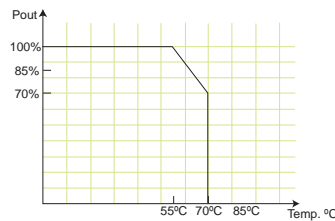

Pin Assignments

Input Power Connector

CN4	Pin 1	Pin 2	Pin 3	Pin 4
	VIN	VIN	GND	GND

Output Power Connector

CN1 CN2	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V

J1 Standard 2-pins ATX

ATX Mode Connector

CN3	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Wire Harness Selection Guide

DC Input (CN4)



- Options 1.**
PN: CB-P1LP4-RS
Cable for FSP0601AD101C 60 W / UP0451E12P 45 W/UP0251E12PL 25W AC-DC adapter



- Options 2.**
PN: CB-MD4P4-RS
Cable for 63000-FSP120AAB-RS 120 W AC-DC adapter



- Options 3.**
PN: CB-NOLP4-RS
Cable for terminal block

SBC Main Power (J1)



- Options 1.**
PN: 32102-021500-200-RS
20-pin ATX to 20-pin ATX cable

I/O Power (CN1 & CN2)



- Options 1.**
PN: CB-3PSATA-RS
Cable for SATA



- Options 2.**
PN: CB-3PIDE-RS
Cable for IDE HDD or any STD 4-pin I/O devices

Power On/Off (CN3)



- Options 1.**
PN: CB-JST3PSW-RS
Cable with on/off switch



- Options 2.**
PN: CB-JST3P001-RS
Cable to SBC (5 VSB & PS_ON)

Packing Information

1 x IDD-9364120A

1 x QIG

Ordering Information

Part No.	Description
IDD-9364120A-R11	120 W DC/DC 9-36 V input, 12 V, 5 V, 3.3 V, -12 V & 5 VSB output
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W / UP0451E12P 45 W / UP0251E12PL 25 W AC-DC adapter
CB-MD4P4-RS	16 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input
32102-021500-200-RS	30 cm 20-pin ATX to 20-pin ATX cable

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/ Peripherals

7

Panel Solutions Introduction