

# I/O Expansion board Release Note: Mar/19/2004

## Pin Assignment of I-8112:

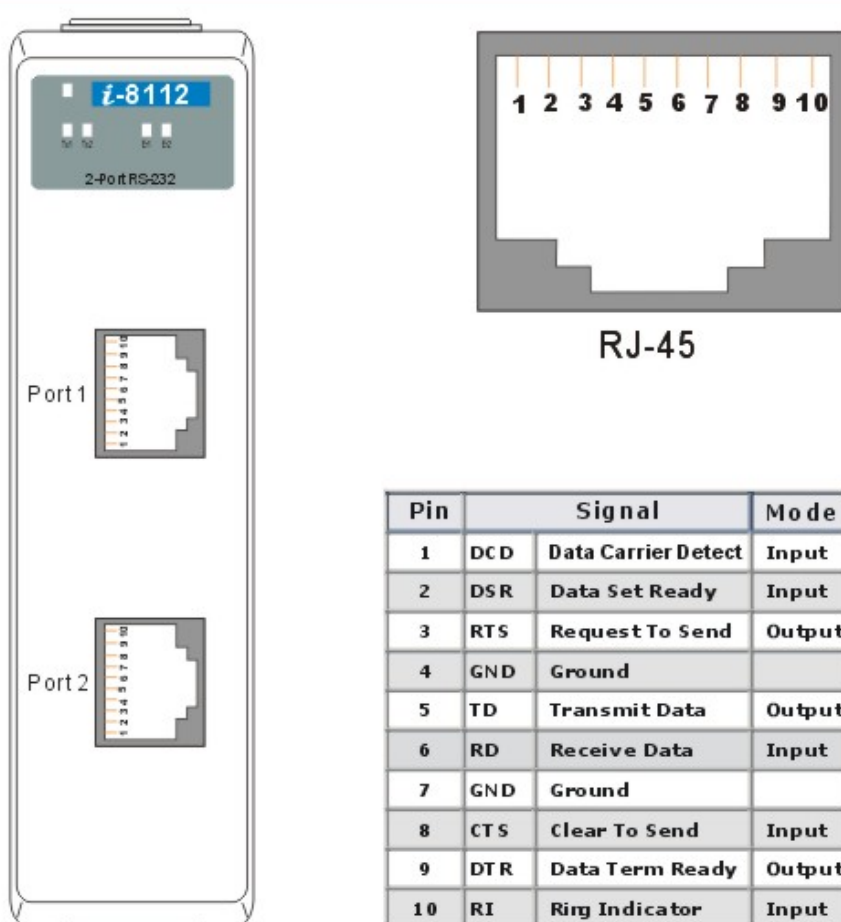


Diagram illustrating the pin assignment for the I-8112 expansion board. The board features two RJ-45 ports, labeled Port 1 and Port 2. The pin assignment table below details the signal and mode for each pin.

Pin	Signal	Mode
1	DCD Data Carrier Detect	Input
2	DSR Data Set Ready	Input
3	RTS Request To Send	Output
4	GND Ground	
5	TD Transmit Data	Output
6	RD Receive Data	Input
7	GND Ground	
8	CTS Clear To Send	Input
9	DTR Data Term Ready	Output
10	RI Ring Indicator	Input

### Technical Service:

Email problem-report to [service@icpdas.com](mailto:service@icpdas.com) if you have any questions.