

# ACE-A622A


220W 1U Type ATX Power Supply



## Specifications

<b>Input Type</b>	90~264 VAC Full Range					
<b>Output Voltage</b>	<b>+3.3 V</b>	<b>+5 V</b>	<b>+12 V</b>	<b>+12 V 2</b>	<b>-12 V</b>	<b>+5 Vsb</b>
	14 A (0.5 A min.)	16 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
<b>Efficiency</b>	80%					
<b>Temperature</b>	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
<b>MTBF (hrs)</b>	100,000 hr					
<b>Output Connector</b>	20-pin ATX, 4-pin 12 V, three HDD and one FDD					
<b>Dimensions</b>	150 x 81.5 x 40.5 (mm)					

## Dimensions (Unit: mm)

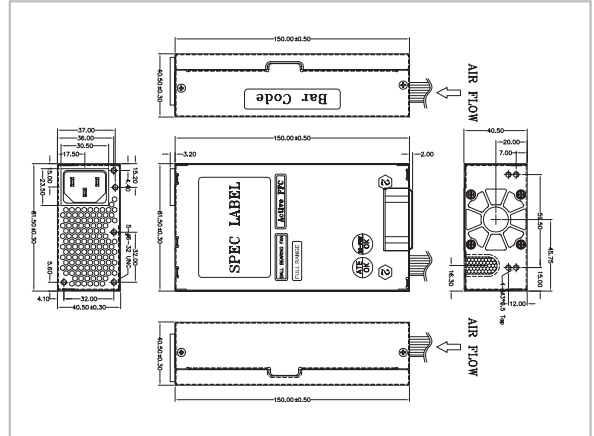

## Ordering Information

Part No.	Description
ACE-A622A-RS-R11	220W AC-DC 1U flex ATX Power Supply, with PFC/ErP, meet 80 PLUS

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/ Peripherals

7

Panel Solutions Introduction

# ACE-A618A


180W 1U Type ATX Power Supply



## Specifications

<b>Input Type</b>	90~264 VAC Full Range				
<b>Output Voltage</b>	<b>+3.3 V</b>	<b>+5 V</b>	<b>+12 V</b>	<b>-12 V</b>	<b>+5 Vsb</b>
	14 A (0.3 A min.)	16 A (0.3 A min.)	14 A (1.5 A min.)	0.5 A (0 A min.)	2.0 A (0 A min.)
<b>Efficiency</b>	68%				
<b>Temperature</b>	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C				
<b>MTBF (hrs)</b>	100,000 hr				
<b>Output Connector</b>	1 x 20-pin ATX, 1 x 4-pin 12V CPU, 3 x HDD, 1 x FDD				
<b>Dimensions</b>	150 x 81.5 x 40.5 (mm)				

## Dimensions (Unit: mm)

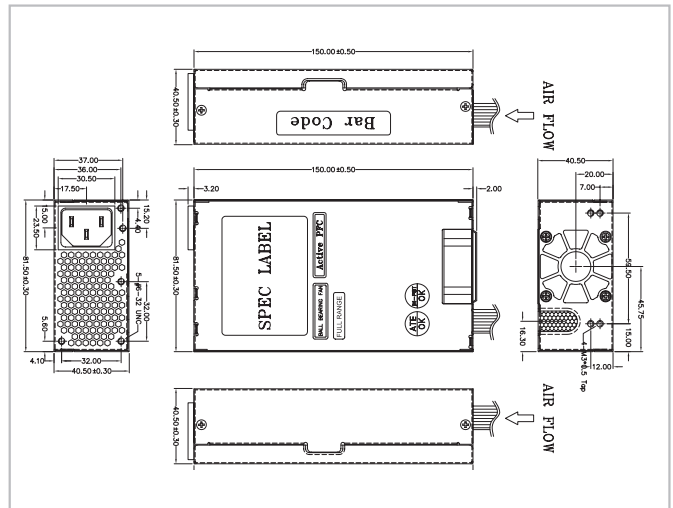

## Ordering Information

Part No.	Description
ACE-A618A-RS-R11	180WAC-DC 1U flex ATX Power Supply, with PFC/ErP