

ACE-A615A


150W 1U Type ATX Power Supply



Specifications

| | | | | | |
|------------------|--|----------------------|--------------------|---------------------|---------------------|
| Input Type | 90~264 VAC Full Range | | | | |
| Output Voltage | +3.3 V | +5 V | +12 V | -12 V | +5 Vsb |
| | 10 A (0.3 A min.) | 13 A (0.3 A min.) | 10 A (1 A min.) | 0.5 A (0 A min.) | 2.0 A (0 A min.) |
| Efficiency | 68% | | | | |
| Temperature | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C | | | | |
| MTBF (hrs) | 100,000 hr | | | | |
| Output Connector | 20-pin ATX, 4-pin 12 V CPU, FDD, 3 x HDD | | | | |
| Dimensions | 150 x 81.5 x 40.5 (mm) | | | | |

Dimensions (Unit: mm)

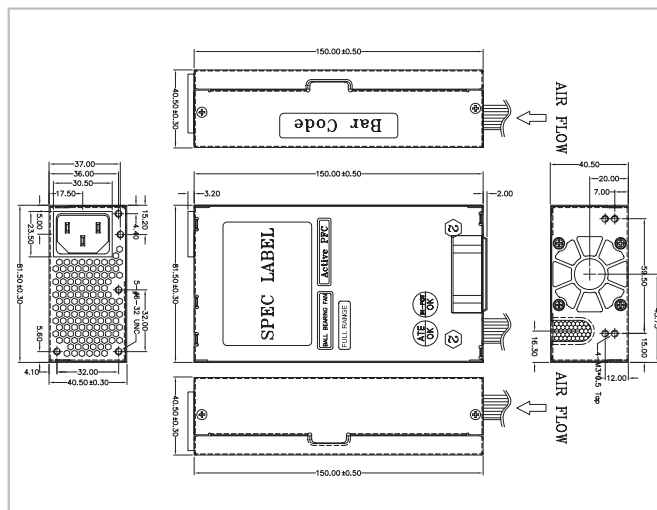

Ordering Information

| Part No. | Description |
|------------------|---|
| ACE-A615A-RS-R11 | 150W AC-DC 1U flex ATX Power Supply, with PFC/ErP |

1U AC Input AT Type

ACE-916AP


150W 1U Type AT Power Supply



Specifications

| | | | | | |
|------------------|--|------------------|-----|------|------|
| Input Type | 90 ~ 264VAC Full Range (ACE-916AP) | | | | |
| Output Voltage | +5V | +12V | -5V | -12V | +24V |
| | 16A (1A min) | 6A (0.5A min) | | 0.3A | |
| Efficiency | 68% | | | | |
| Temperature | 0°C ~ 50°C (Operating), -20°C ~ 80°C (Storage) | | | | |
| MTBF (hrs) | 100,000 | | | | |
| Output Connector | P8P9, FDD, 3 x HDD | | | | |
| Dimensions | 150 x 81.5 x 40.5 mm | | | | |

Dimensions (Unit: mm)

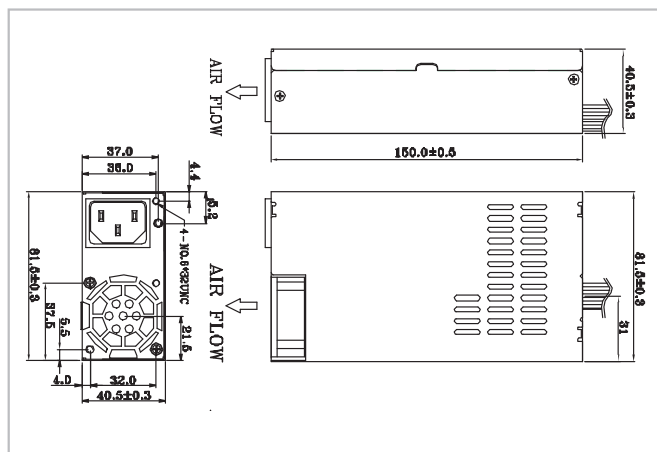

Ordering Information

| Part No. | Description |
|--------------|--------------------------------------|
| ACE-916AP-RS | 150W AC-DC AT Power Supply, with PFC |

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/ Peripherals

7

Panel Solutions Introduction