

Industrial Device Server User's Manual

IDS-5011F Series



Version 1.0

May 2008.



ORing Industrial Networking Corp.

4F., NO.3, Lane235, Baociao Rd.Sindian City,

Taipei County 23145 Taiwan, R.O.C.

Tel: + 886 2 2918 3036

Fax:+ 886 2 2918 3084

Website : www.oring-networking.com

E-mail : support@oring-networking.com

Table of Content

GETTING TO KNOW YOUR DEVICE SERVER	1
1.1 About the IDS-5011F Serial Device Server.....	1
1.2 Software Features	1
1.3 Hardware Features	2
HARDWARE INSTALLATION	3
2.1 Install IDS-5011F on DIN-Rail.....	3
2.1.1 Mount IDS-5011F on DIN-Rail	3
2.2 Wall Mounting Installation	4
2.2.1 Mount IDS-5011F on wall.....	5
HARDWARE OVERVIEW	8
3.1 Front Panel	8
3.2 Front Panel LEDs.....	9
3.3 Top Panel.....	10
3.4 Bottom Panel	10
3.5 Rear Panel.....	12
CABLES	13
4.1 Fibers.....	13
MANAGEMENT INTERFACE	14
5.1 DS-Tool.....	14
5.1.1 Install IDS-Tool.....	14
5.1.2 Using DS-Tool	16
5.1.2.1 Explore device servers	16
5.1.2.2 Configure device servers.....	17
5.1.2.3 Configure serial port	24
5.2 Configuration by Web Browser	33
5.2.1 Connect to the Web page	33
5.2.1.1 System	35
5.2.1.2 Port serial setting.....	39
5.2.1.3 Management	47



5.2.1.4	Save/Reboot.....	51
5.3	Configuration by SSH Console	52
5.3.1	Connect to DS.....	52
TECHNICAL SPECIFICATIONS		53

Getting to Know Your Device Server

1.1 About the IDS-5011F Serial Device Server



IDS-5011F is an innovative 1 port RS232/422/485 to 1 port fiber optical device server. The option of the fiber port can be multi-mode (IDS-5011F-MM) or single mode (IDS-5011F-SS) for different requirement of transmission distance. To assure the agility and security of critical data, IDS-5011F offers many powerful features for SW redundant functions.

The IDS-5011F can simultaneously transfer data into 5 host PCs. This feature assures all critical data that saved in different host PC from Ethernet breaking or host PCs failure

Secondly, the IDS-5011F provides dual redundant power inputs on DC power jack and terminal block. IDS-5011F also provides NAT pass through function so that users are able to manage IDS-5011F inside or outside the NAT router. It is easy for different IP domain users to use IDS-5011F. Therefore, IDS-5011F is the best communication redundant solution for current application of serial devices with fiber optical interface.

1.2 Software Features

- NAT-pass through: User can manage IDS-5011F through NAT router
- Redundant Power Inputs: 12~48VDC on power jack and terminal block
- Redundant multiple host devices: 5 simultaneous in Virtual COM, TCP Server, TCP Client mode, UDP。
- Secured Management by HTTPS and SSH。
- Versatile Modes: Virtual Com, Serial Tunnel, TCP Server, TCP Client, UDP
- Event Warning by Syslog, Email, SNMP trap, and Beeper



- Various Windows O.S. supported: Windows NT(5.0)/2000/XP/2003/VISTA

1.3 Hardware Features

- Redundant Power Inputs: 12~48 VDC on terminal block and power jack
- Operating Temperature: -10 to 60°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 5% to 95%, non-condensing
- Casing: IP-30
- 100BaseFX multi-mode or single-mode fiber port
- Dimensions(W x D x H) : 72mm(W)x125 mm(D)x31mm(H)

Hardware Installation

2.1 Install IDS-5011F on DIN-Rail

Each IDS-5011F has a Din-Rail kit on rear panel. The Din-Rail kit helps IDS-5011F to fix on the Din-Rail. It is easy to install the IDS-5011F on the Din-Rail:

2.1.1 Mount IDS-5011F on DIN-Rail

Step 1: Slant the IDS-5011F and mount the metal spring to Din-Rail.

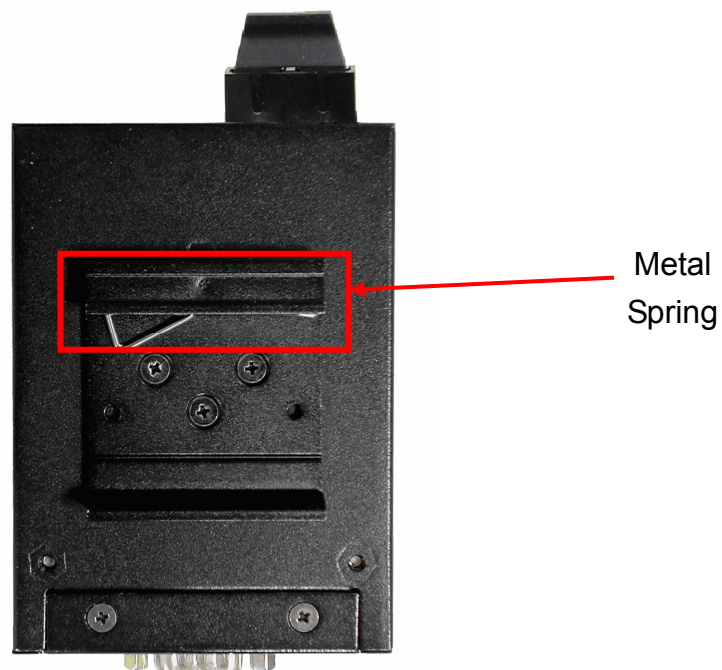


Figure 2-1

Step 2: Push the IDS-5011F toward the Din-Rail until you heard a “click” sound.



Figure 2-2

2.2 Wall Mounting Installation

Each IDS-5011F has another installation method for you. A wall mount panel can be found in the package. The following steps show how to mount the IDS-5011F on the wall:

2.2.1 Mount IDS-5011F on wall

Step 1: Remove Din-Rail kit.

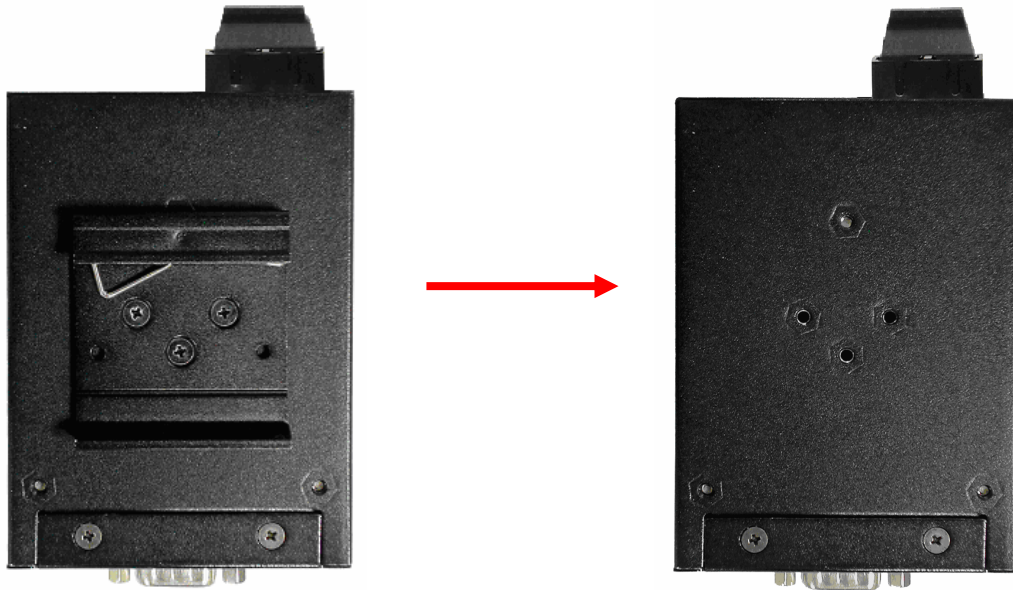


Figure 2-3

Step 2: Use 6 screws that can be found in the package to combine the wall mount panel.
Just like the picture shows below:



Figure 2-4

The screws specification shows in the following two pictures. In order to prevent IDS-5011F from any damage, the size of screws should not be larger than the size that used in IDS-5011F.

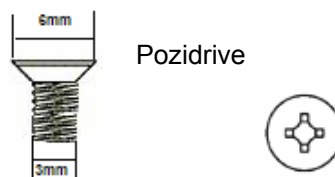


Figure 2-5

Step 3: Mount the combined IDS-5011F on the wall.



Figure 2-6

Hardware Overview

3.1 Front Panel



Figure 3-1

1. Product description of IDS-5011F.
2. LED for PWR1 and system status. When the PWR1 links, the green led will be light on.
3. LED for PWR2 and system status. When the PWR2 links, the green led will be light on.
4. LED of 100Base-FX Ethernet port.
5. LED of serial port. Green for transmitting, red for receiving



3.2 Front Panel LEDs

The following table describes the labels that stick on the IDS-5011F.

LED	Color	Status	Description
PWR1	Green/Red	On	DC power 1 activated.
		Red blinking	Indicates an IP conflict, or DHCP or BOOTP server did not respond properly
PWR2	Green/Red	On	DC power 2 activated.
		Red blinking	Indicates an IP conflict, or DHCP or BOOTP server did not respond properly
ETH	Green/Amber	Green On/Blinking	100Mbps LNK/ACT
Serial	Green	Blinking	Serial port is transmitting data
	Red	Blinking	Serial port is receiving data

Table 3-1 Front panel LEDs

3.3 Top Panel

The Top panel components of IDS-5011F are showed as below:

1. Terminal block include: PWR1 (12 ~ 48V DC)
2. Power Jack include: PWR2 (12 ~ 48V DC)
3. 100Base-FX Ethernet interface.

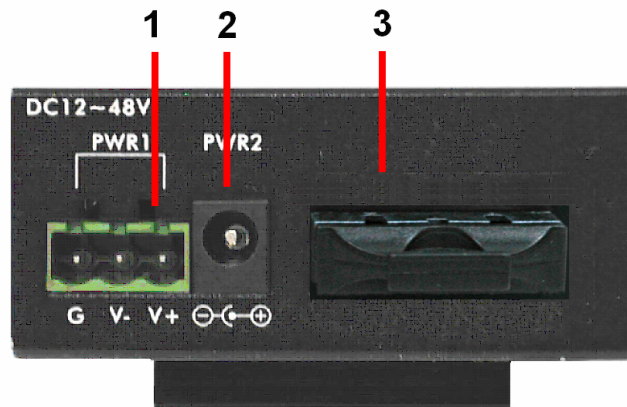


Figure 3-2

3.4 Bottom Panel

The bottom panel components of IDS-5011F are showed as below:

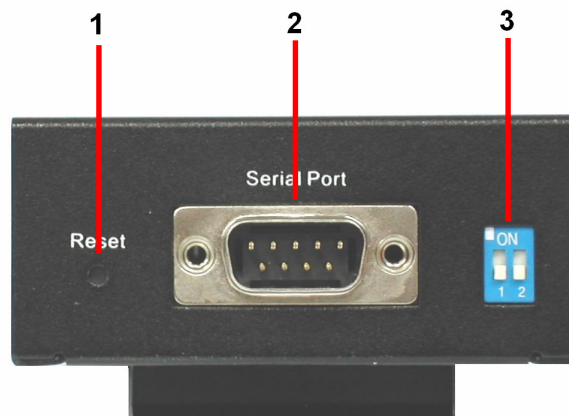
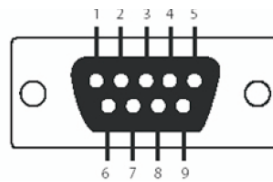


Figure 3-3

1. Reset bottom. 5 seconds for factory default.
2. Male DB9 connector: Serial interface of RS-232/422/485 (2 wire)(4 wire).

DB9 connector


Pin #	RS 232	RS 422	RS 485 (4 wire)	RS 485 (2 wire)
1	DCD	RXD -	RXD -	
2	RXD	RXD +	RXD +	
3	TXD	TXD +	TXD +	DATA +
4	DTR	TXD -	TXD -	DATA -
5	GND	GND	GND	GND
6	DSR			
7	RTS			
8	CTS			
9	RI			
RS 232 mod act as DTE				

Table 3-2 Pin assignment

3. DIP Switch: Termination for RS-422/485

DIP 1	DIP 2	Termination Configuration
ON	ON	Termination for long distance 4-wire RS485/422
ON	OFF	Reserved
OFF	ON	Termination for long distance 2-wire RS485
OFF	OFF	No termination for RS485/ 422 (short distance)

Table 3-2 DIP Switch

3.5 Rear Panel

The rear panel components of IDS-5011F are showed as below:

1. Screw holes for wall mount kit and DIN-Rail kit.
2. Din-Rail kit
3. Wall Mount kit.


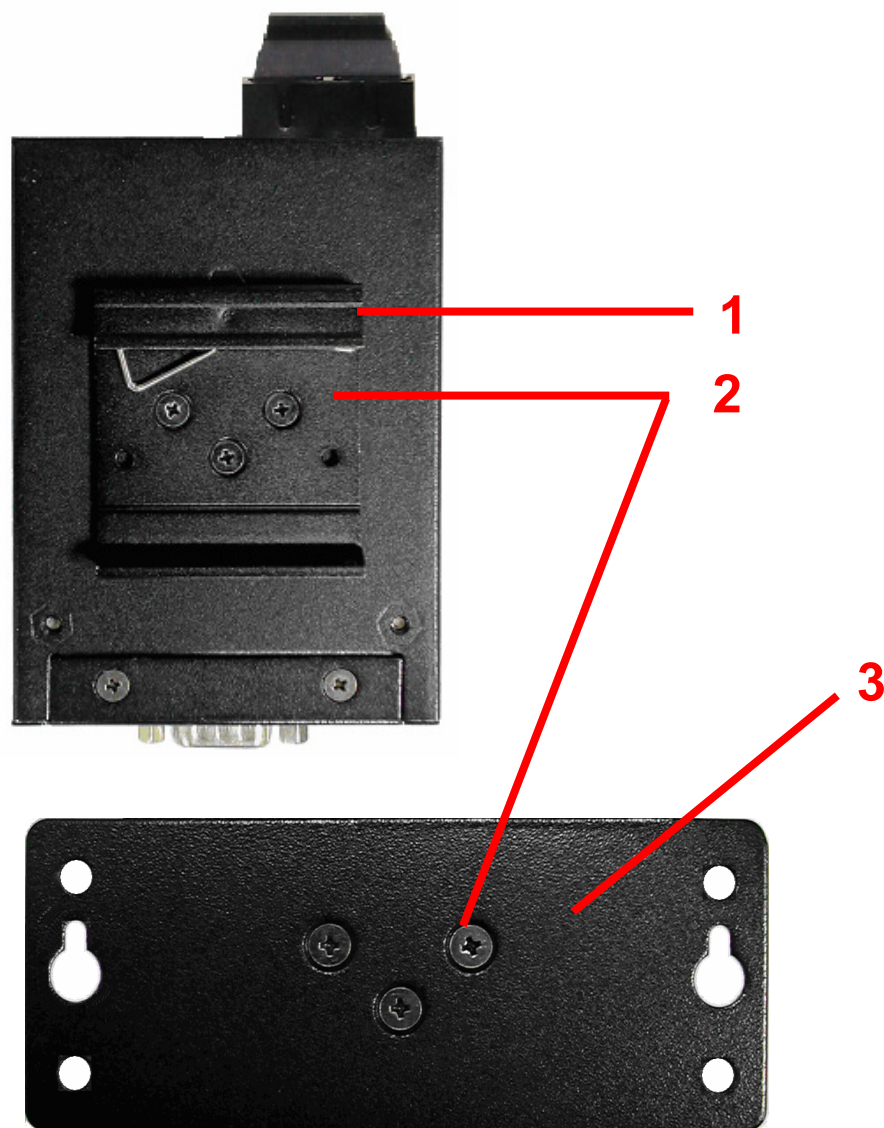


Figure 3-4 Rear Panel

Cables

4.1 Fibers

IDS-5011F has one fiber optical ports. The fiber optical port is multi-mode (0 to 2 km, 1310 nm, 50/125 μm to 62.5/125 μm) or single-mode (0 to 30 km, 1310 nm, 9/125 μm) with SC connector. Please remember that the TX port of IDS-5011F should be connected to the RX port of Switch and vice versa.

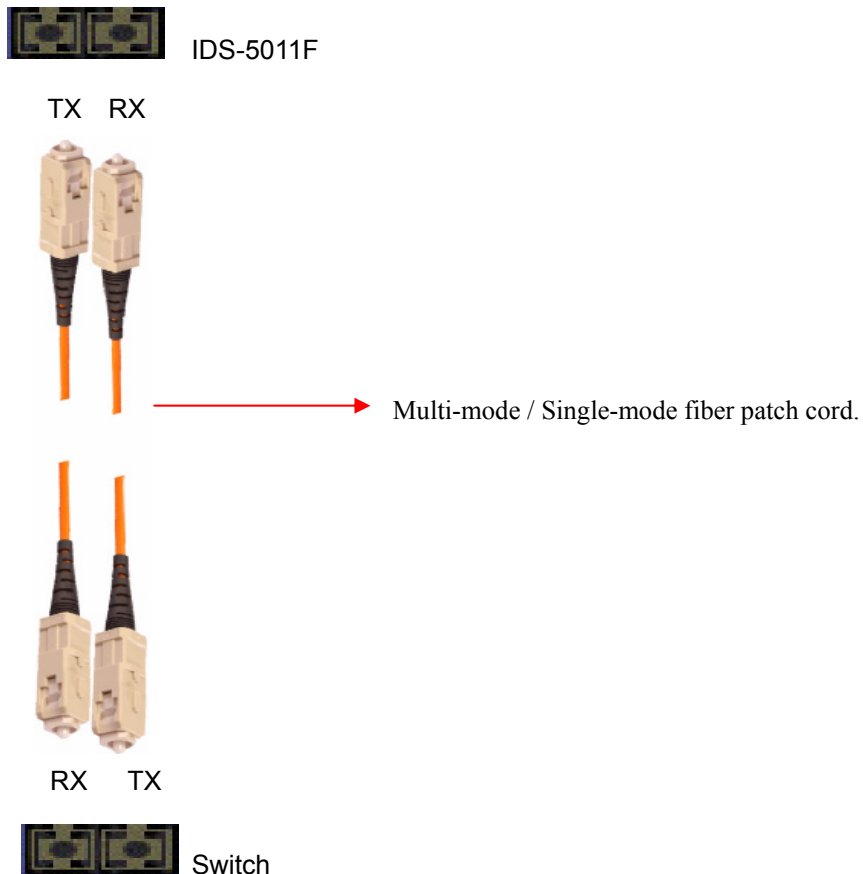



Management Interface

5.1 DS-Tool

DS-Tool is a powerful Windows utility for DS series. It supports device discovery, device configuration, group setup, group firmware update, monitoring functions...etc. It is easy for you to install and configure devices over the network.

5.1.1 Install IDS-Tool

Step 1: Execute the Setup program, click "**start**" after selecting the folder for DS-Tool.

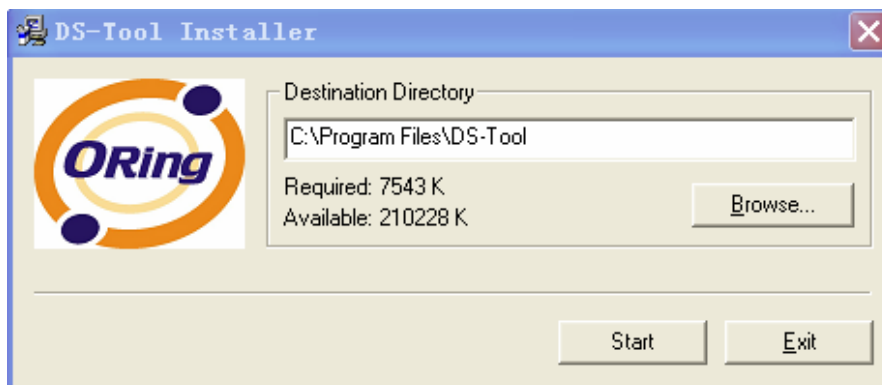


Figure 5-1

Step 2: When installation complete successfully, then click "OK".

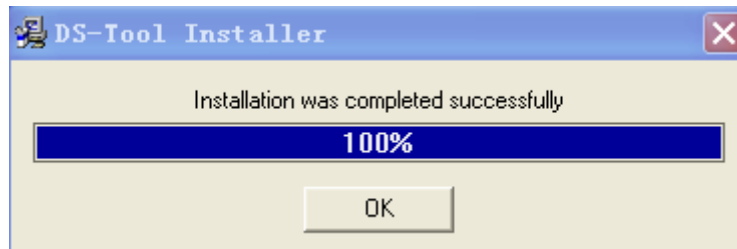


Figure 5-2

Step 3: Check for your selection.

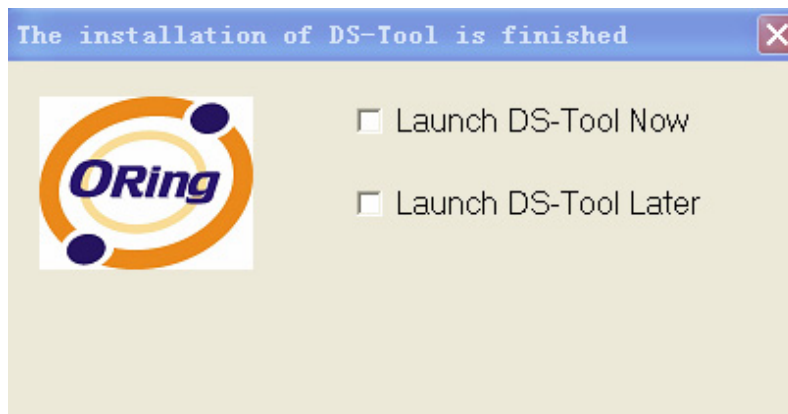


Figure 5-3

5.1.2 Using DS-Tool

5.1.2.1 Explore device servers

DS-Tool will broadcast to the network and search all available DS devices in the network. The default IP address of device is “**192.168.10.2**”, and selects the searching device you wish to use and press “**Add**” button.

You can set static IP address or in DHCP client mode to get IP address automatically. Finally, click “**OK**” button to add the device.

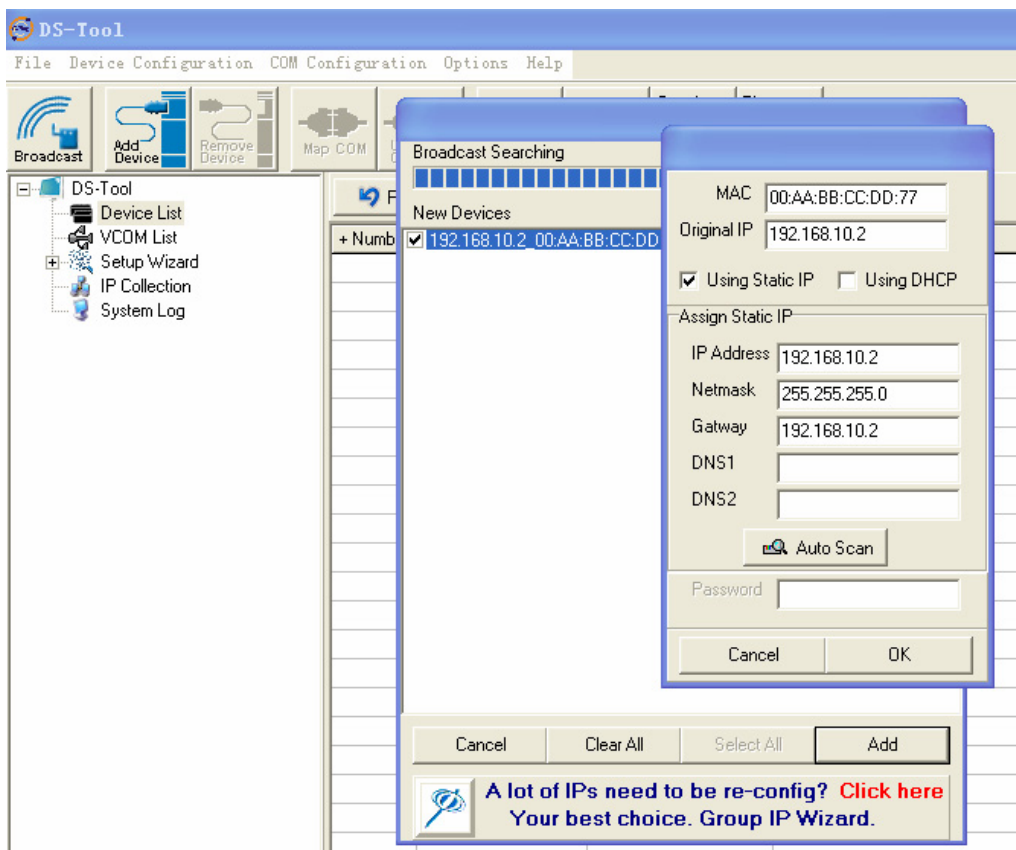


Figure 5-4

5.1.2.2 Configure device servers

General settings

This page includes the setting of device name, SNTP server and Auto IP Report.

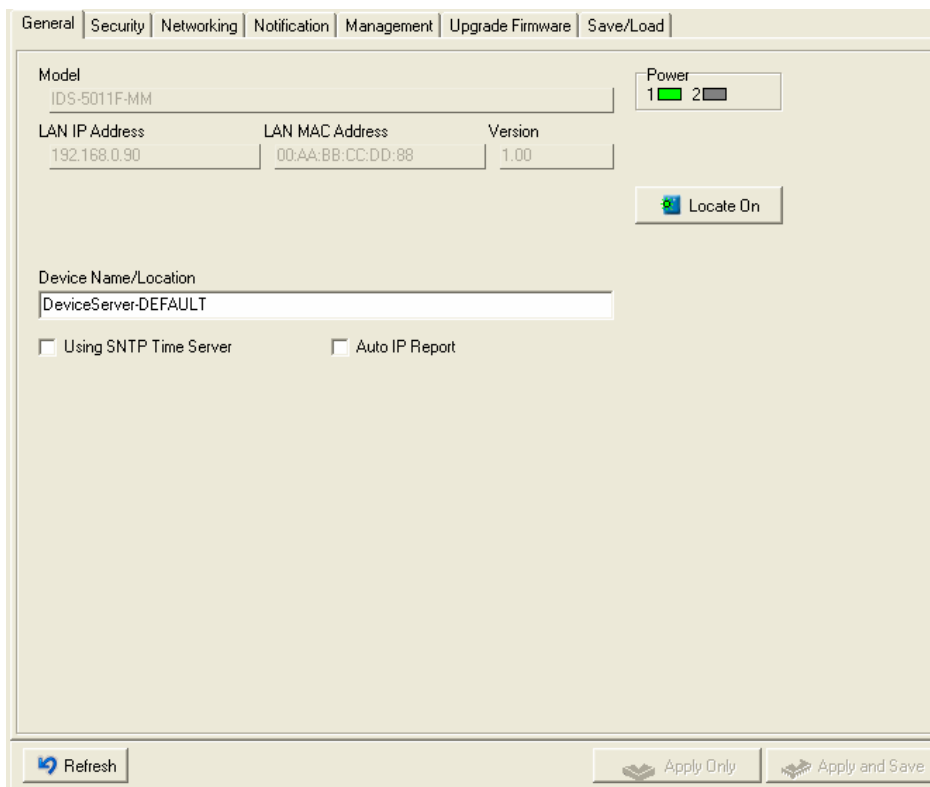


Figure 5-5 General settings

The following table describes the labels in this screen.

Label	Description
Device Name/location	You can set the device name or related information. By clicking "Locate On" button you can locate the serial server's position.
Set SNTP	Input the SNTP server domain name or IP address, port and select the Time zone.



Set Auto IP Report	By Clicking the “Get current Host” button you will get your local IP, and then set the Report interval time. The device server will report its status periodically.
--------------------	--

Table 5-1 General settings

At IP collection option show the device server status. The report interval is 0 indicate disable this setting (default). But you can set the other IP or Port.

Security

Figure 5-6 Security


The following table describes the labels in this screen.

Label	Description
Accessible IP Setting	To prevent unauthorized access by setting host IP addresses and network masks.
Password setting	You can set the password to prevent unauthorized access from your server. Factory default is no password.

Table 5-2 Security

Network Setting

Device DS can connect the Network by wire . You must assign a valid IP address for DS before attached in your network environment. Your network administrator should provide you the IP address and related settings. The IP address must be unique within the network (otherwise, DS will not have a valid connection to the network). You can choose from three possible “**IP configuration**” modes: Static, DHCP/BOOTP. The Factory Default IP address is “**192.168.10.2**”

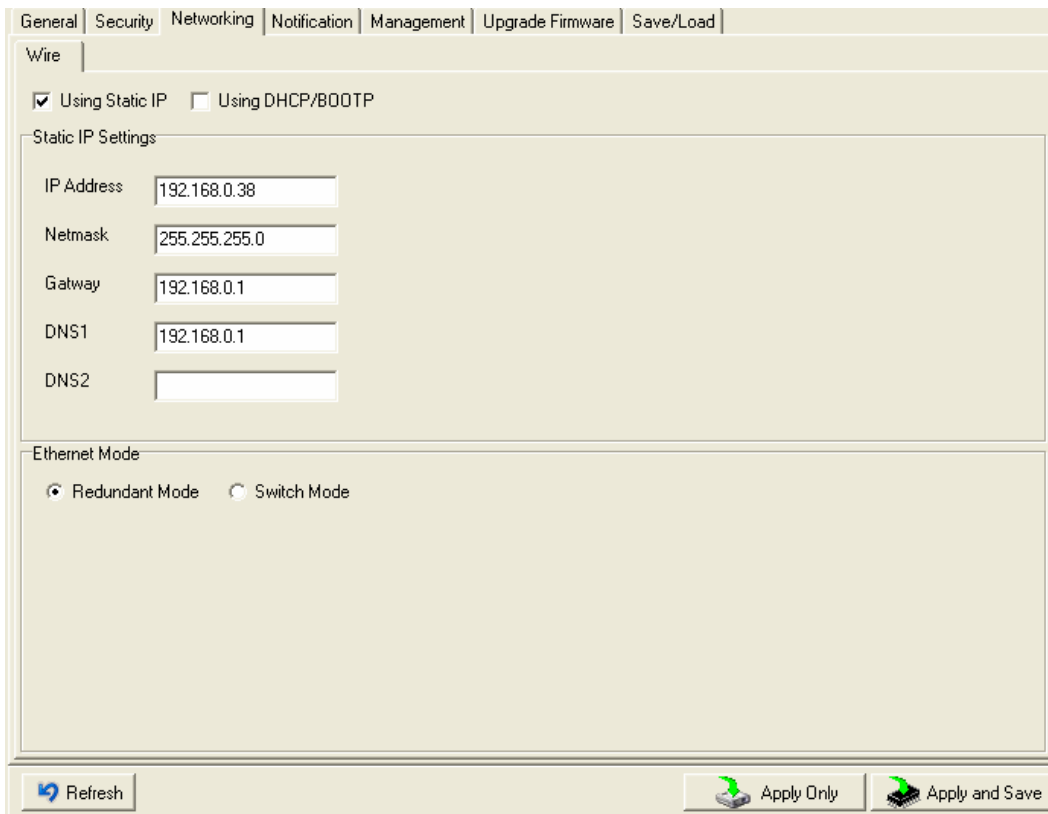

General | Security | **Networking** | Notification | Management | Upgrade Firmware | Save/Load

Wire

Using Static IP Using DHCP/BOOTP

Static IP Settings

IP Address: 192.168.0.38

Netmask: 255.255.255.0

Gateway: 192.168.0.1

DNS1: 192.168.0.1

DNS2:

Ethernet Mode

Redundant Mode Switch Mode

Refresh Apply Only Apply and Save

Figure 5-7 Network Setting



The following table describes the labels in this screen.

Label	Description
Using DHCP/BOOTP	IP Address automatically assigned by a DHCP server in your network.
Static IP Address	Manually assigning an IP address.
Subnet Mask	All devices on the network must have the same subnet mask to communicate on the network.
Gateway	Enter the IP address of the router in you network.
DNS Server	Enter the IP address of the DNS server, The DNS server translates domain names into IP address.

Table 5-3 Network setting

Notification

Specify the events that should be notified to the administrator. The events can be alarmed by E-mail, SNMP trap, or system log.

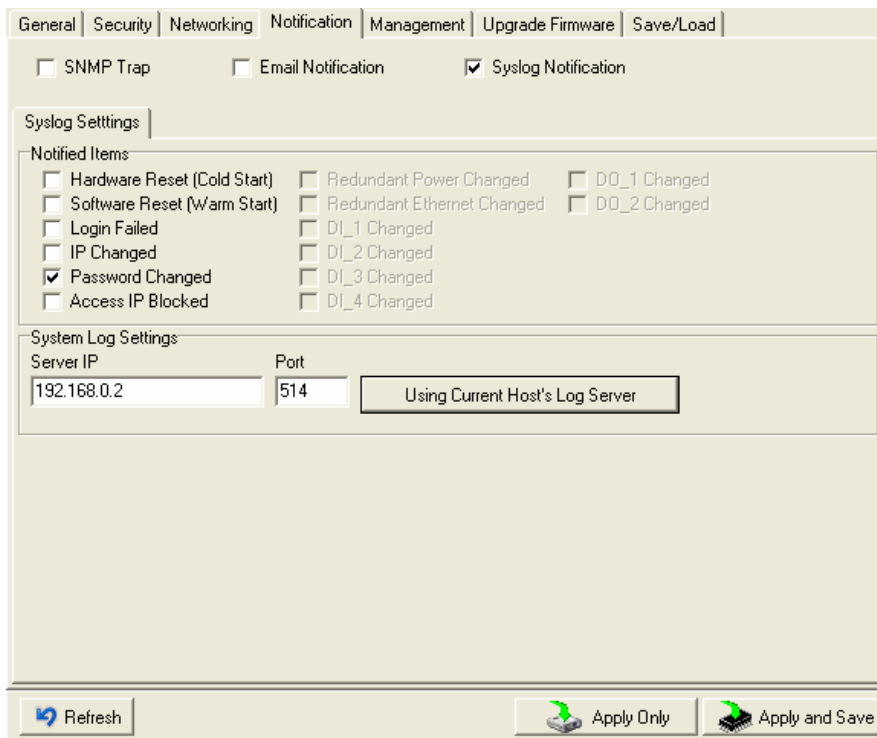


Figure 5-8 Notification

The following table describes the labels in this screen.

Label	Description
SNMP Trap	To notify events by SNMP trap.
Email Notification	To notify events by Email.
Syslog Notification	To notify events by Syslog.
Notify items	Events to be notified.
Apply	Apply current setting.
Apply and Save	Apply and save current setting.

Table 5-3 Notification

Management

General | Security | Networking | Notification | **Management** | Upgrade Firmware

Web Management Enable

Telnet Management Enable

SNMP Management Enable

SNMP Management Settings

Community

Location

Contact

Trap Server1

Trap Server2

Trap Server3

Trap Server4

Figure 5-9 Management

The following table describes the labels in this screen.

Label	Description
Web Management Enable	To enable management from Web. Click " Goto Web Management " button to access web.
Telnet Management Enable	To enable management by Telnet. Click " Goto Telnet Management " button to execute Telnet command.
SNMP Management Enable	To enable management by SNMP.
SNMP Management Settings	To configure SNMP related settings.

Table 5-4 Management

Upgrade Firmware

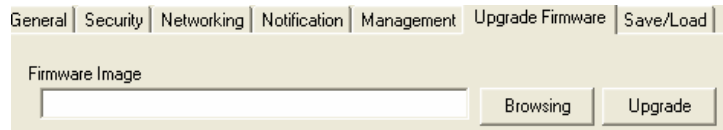


Figure 5-10 Upgrade Firmware

The following table describes the labels in this screen.

Label	Description
Browsing	Browse the file and upgrade
Upgrade	Enable the firmware upgrade.

Table 5-5 Upgrade Firmware

Save/Load

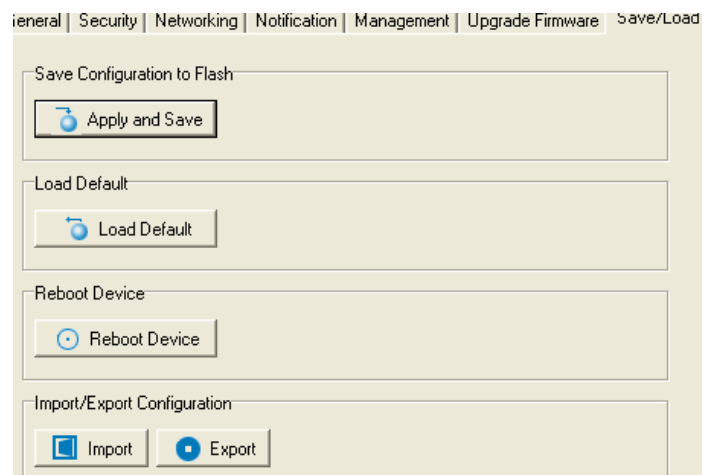


Figure 5-11 Save / Load

The following table describes the labels in this screen.


Label	Description
Save Configuration to Flash	Save current configuration into flash memory.

Load Default	Load default configuration except the network settings. If you want to load all factory default, you need to press “Reset” button on the device (Hardware restore).
Reboot Device	Reboot the device server (warm start).
Import Configuration	Restore the previous exported configuration.
Export Configuration	Exported current configuration to a file to backup the configuration.

Table 5-6 Save / Load

5.1.2.3 Configure serial port

Serial Settings

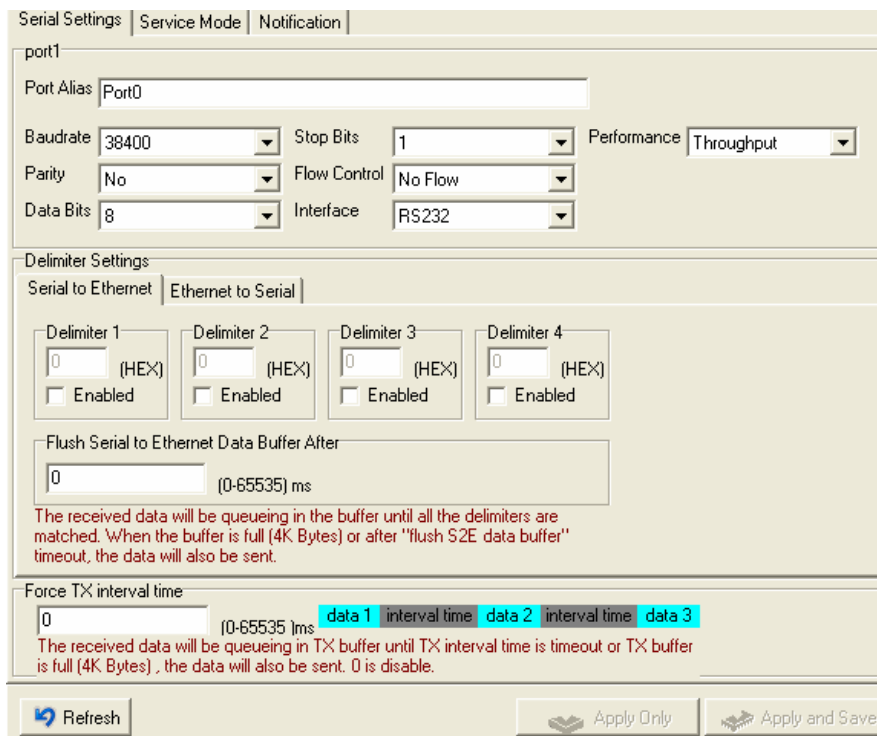

Serial Settings | Service Mode | Notification

port1

Port Alias Port0

Baudrate 38400 Stop Bits 1 Performance Throughput

Parity No Flow Control No Flow

Data Bits 8 Interface RS232

Delimiter Settings

Serial to Ethernet | Ethernet to Serial

Delimiter 1: 0 (HEX) Enabled

Delimiter 2: 0 (HEX) Enabled

Delimiter 3: 0 (HEX) Enabled

Delimiter 4: 0 (HEX) Enabled

Flush Serial to Ethernet Data Buffer After: 0 (0-65535) ms

The received data will be queueing in the buffer until all the delimiters are matched. When the buffer is full (4K Bytes) or after "flush S2E data buffer" timeout, the data will also be sent.

Force TX interval time: 0 (0-65535) ms data 1 interval time data 2 interval time data 3

The received data will be queueing in TX buffer until TX interval time is timeout or TX buffer is full (4K Bytes), the data will also be sent. 0 is disable.

Refresh Apply Only Apply and Save

Figure 5-12 Serial Settings



The following table describes the labels in this screen.

Label	Description
Port Alias	Remark the port to hint the connected device.
Interface	RS232 / RS422 / RS485(2-wires) / RS485(4-wires)
Baud rate	110bps/300bps/1200bps/2400bps/4800bps/9600bps/19200bps/ 38400bps/57600bps/115200bps/230400bps/460800bps
Data Bits	5, 6, 7, 8
Stop Bits	1, 2 (1.5)
Parity	No, Even, Odd, Mark, Space
Flow Control	No, XON/XOFF, RTS/CTS, DTR/DSR
Performance	Throughput: This mode optimized for highest transmission speed. Latency: This mode optimized for shortest response time.
Serial to Ethernet	<p>Delimiter: You can define max. 4 delimiters (00~FF, Hex) for each way. The data will be hold until the delimiters are received or the option-"Flush Serial to Ethernet data buffer" times out. 0 means disable. Factory default is 0.</p> <p>Flush Data Buffer After: The received data will be queuing in the buffer until all the delimiters are matched. When the buffer is full (4K Bytes) or after "flush S2E data buffer" timeout the data will also be sent. You can set the time from 0 to 65535 seconds.</p>
Ethernet to Serial	<p>Delimiter: You can define max. 4 delimiters (00~FF, Hex) for each way. The data will be hold until the delimiters are received or the option "Flush Ethernet to Serial data buffer" times out. 0 means disable. Factory default is 0.</p> <p>Flush Data Buffer After: The received data will be queuing in the buffer until all the delimiters are matched. When the buffer is full (4K Bytes) or after "flushE2S data buffer" timeout the data will also be sent. You can set the time from 0 to 65535 seconds.</p>



Force TX Interval Time	Force TX interval time is to specify the timeout when no data has been transmitted. When the timeout is reached or TX buffer is full (4K Bytes), the queued data will be sent. 0 means disable. Factory default value is 0.
------------------------	---

Table 5-7 Serial settings

Service Mode – Virtual COM Mode

In Virtual COM Mode, The driver establishes a transparent connection between host and serial device by mapping the Port of the serial server serial port to local COM port on the host computer. Virtual COM Mode also supports up to 5 simultaneous connections, so that multiple hosts can send or receive data by the same serial device at the same time.

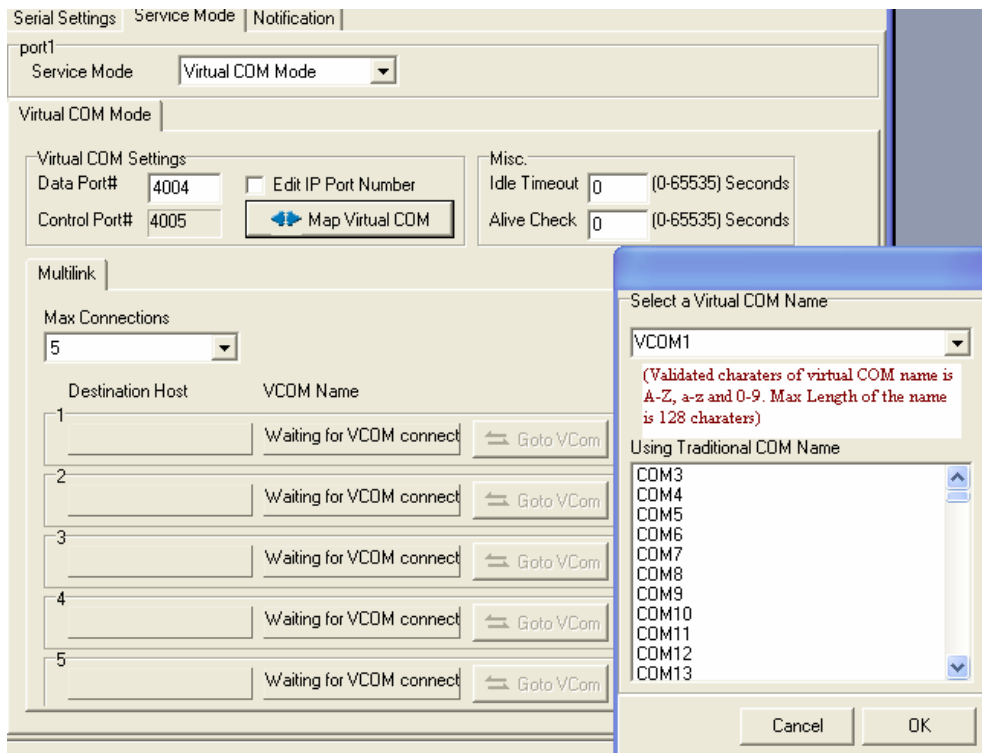


Figure 5-13 Virtual COM



The following table describes the labels in this screen.

Label	Description
Map Virtual COM	Select a Virtual COM Name to map on.
Max Connection	The number of Max connection can support simultaneous connections are 5, default values is 1.
Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.
Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.

Table 5-8 Virtual COM

**Not allowed to mapping Virtual COM from web*

Service Mode – TCP Server Mode

In TCP Server Mode, DS is configured with a unique Port combination on a TCP/IP network. In this case, DS waits passively to be contacted by the device. After a connection is established, it can then proceed with data transmission. TCP Server mode also supports up to 5 simultaneous connections, so that multiple device can receive data from the same serial device at the same time.



Serial Settings | Service Mode | Notification |

Serial Port 1

Service Mode: TCP Server Mode

TCP Server Mode

TCP Server Settings

Data Port: 4002

Control Port: 4003

Misc.

Idle Timeout: 0 (0-65535) Seconds

Alive Check: 0 (0-65535) Seconds

Multilink

Max Connections: 1

Destination Host

1	<input type="text"/>	<input type="text"/>	<input type="button" value="Disconnect"/>
2	<input type="text"/>	<input type="text"/>	<input type="button" value="Disconnect"/>
3	<input type="text"/>	<input type="text"/>	<input type="button" value="Disconnect"/>
4	<input type="text"/>	<input type="text"/>	<input type="button" value="Disconnect"/>
5	<input type="text"/>	<input type="text"/>	<input type="button" value="Disconnect"/>

Figure 5-13 TCP Server mode

The following table describes the labels in this screen.

Label	Description
Data Port	Set the port number for data transmission.
Auto Scan	Scan the data port automatically.
Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.
Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.
Max Connection	The number of Max connection can support simultaneous connections are 5, default values is 1.

Table 5-9 TCP Server mode

Service Mode – TCP Client Mode

In TCP Client Mode, device can establish a TCP connection with server by the method you have settled (Startup or any character). After the data has been transferred, device can disconnect automatically from the server by using the TCP alive check time or Idle time settings.

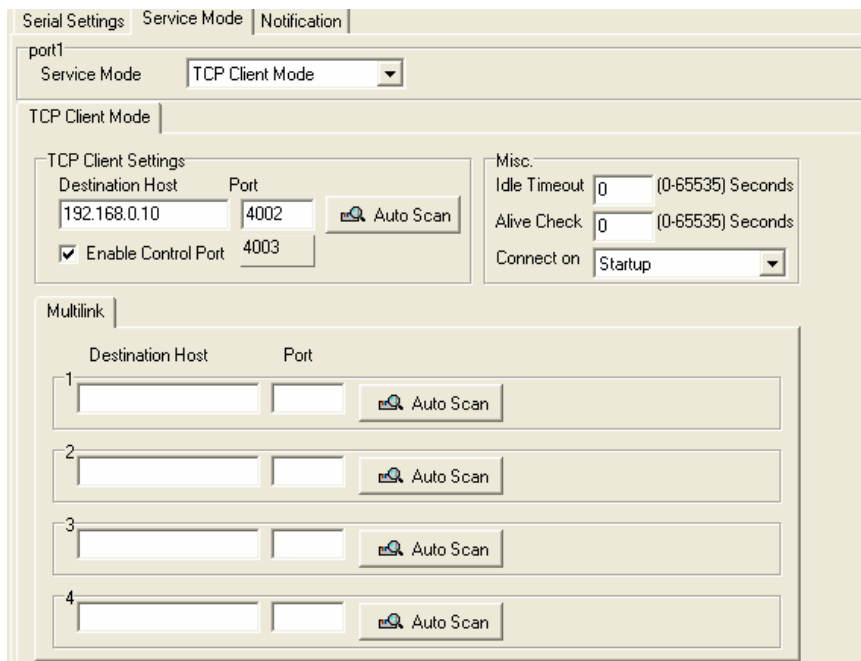


Figure 5-14 TCP Client mode

The following table describes the labels in this screen.

Label	Description
Destination Host	Set the IP address of host.
Port	Set the port number of data port.




Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.
Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.
Connect on Startup	The TCP Client will build TCP connection once the connected serial device is started.
Connect on Any Character	The TCP Client will build TCP connection once the connected serial device starts to send data.

Table 5-10 TCP Client mode

Service Mode – UDP Mode

Compared to TCP communication, UDP is faster and more efficient. In UDP mode, you can Uni-cast or Multi-cast data from the serial device server to host computers, and the serial device can also receive data from one or multiple host

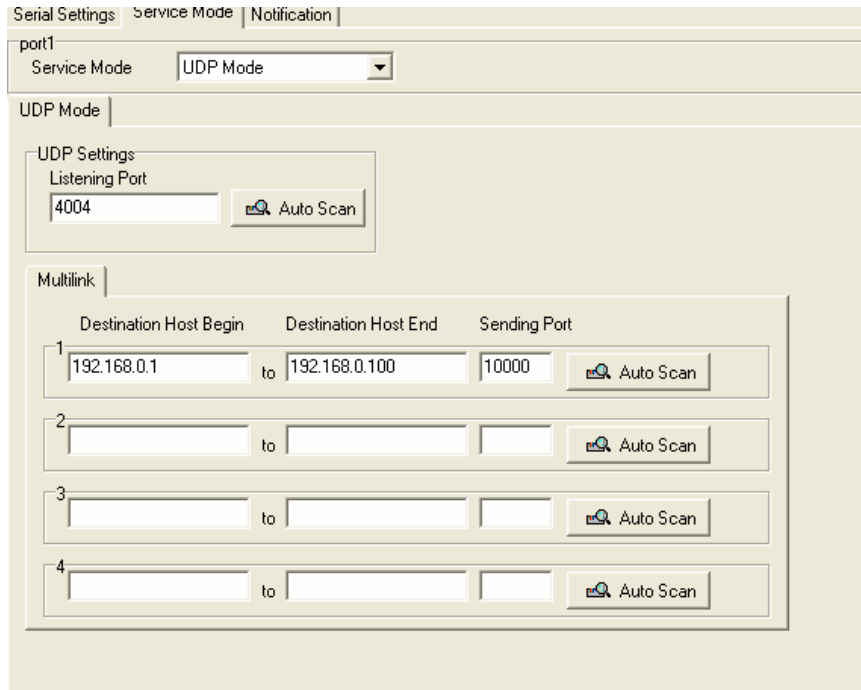

Serial Settings | Service Mode | Notification |

port1

Service Mode

UDP Mode

UDP Settings

Listening Port

Multilink

	Destination Host Begin	Destination Host End	Sending Port	
1	<input type="text" value="192.168.0.1"/>	to <input type="text" value="192.168.0.100"/>	<input type="text" value="10000"/>	<input type="button" value="Auto Scan"/>
2	<input type="text"/>	to <input type="text"/>	<input type="text"/>	<input type="button" value="Auto Scan"/>
3	<input type="text"/>	to <input type="text"/>	<input type="text"/>	<input type="button" value="Auto Scan"/>
4	<input type="text"/>	to <input type="text"/>	<input type="text"/>	<input type="button" value="Auto Scan"/>

Figure 5-15 UDP mode

Notification

Specify the events that should be noticed. The events can be noticed by E-mail, SNMP trap or system log.

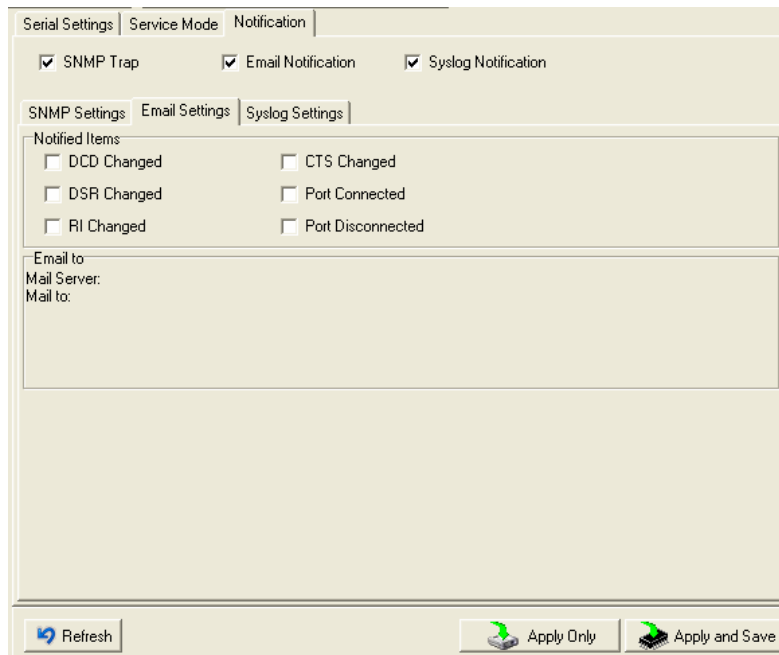


Figure 5-16 Notification

The following table describes the labels in this screen.

Label	Description
DCD changed	When DCD (Data Carrier Detect) signal changes, it indicates that the modem connection status has changed. Notification will be sent.
DSR changed	When DSR (Data Set Ready) signal changes, it indicates that the data communication equipment is powered off. A Notification will be sent.
RI changed	When RI (Ring Indicator) signal changes, it indicates that the incoming of a call. A Notification will be sent.
CTS changed	When CTS (Clear To Send) signal changes, it indicates that the transmission between computer and DCE can proceed. A notification will be sent.
Port connected	In TCP Server Mode, when the device accepts an incoming TCP connection, this event will be trigger. In TCP Client Mode, when the device has connected to the remote host, this event will be trigger. In Virtual COM Mode, Virtual COM is ready to use. A notification will be sent.

Port disconnected	In TCP Server/Client Mode, when the device lost the TCP link, this event will be trigger. In Virtual COM Mode, When Virtual COM is not available, this event will be trigger. A notification will be sent.
-------------------	---

Table 5-11 Notification

5.2 Configuration by Web Browser

5.2.1 CONNECT TO THE WEB PAGE

Step 1: Input the IP address of DS with “**https://192.168.10.2**” in the Address input box of IE.

Step 2: Click “**Yes**” button on the dialog box.



Figure 5-17 Certificate

Step 3: Input the name and password, then click "OK".

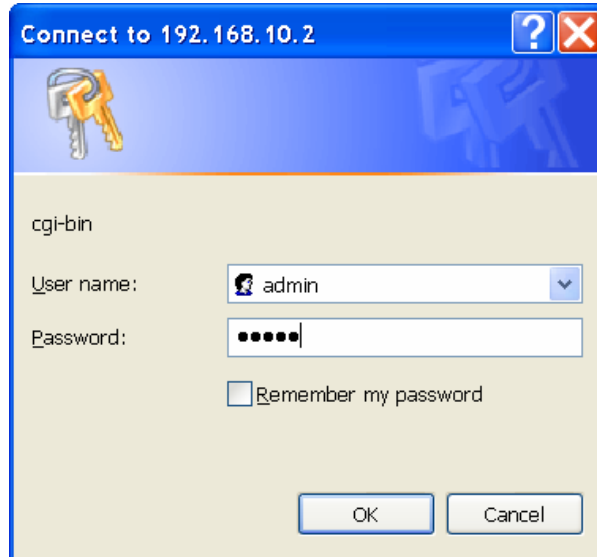


Figure 5-17 Certificate

**Only if password is set.*

Step 4: The system information will be shown as below.

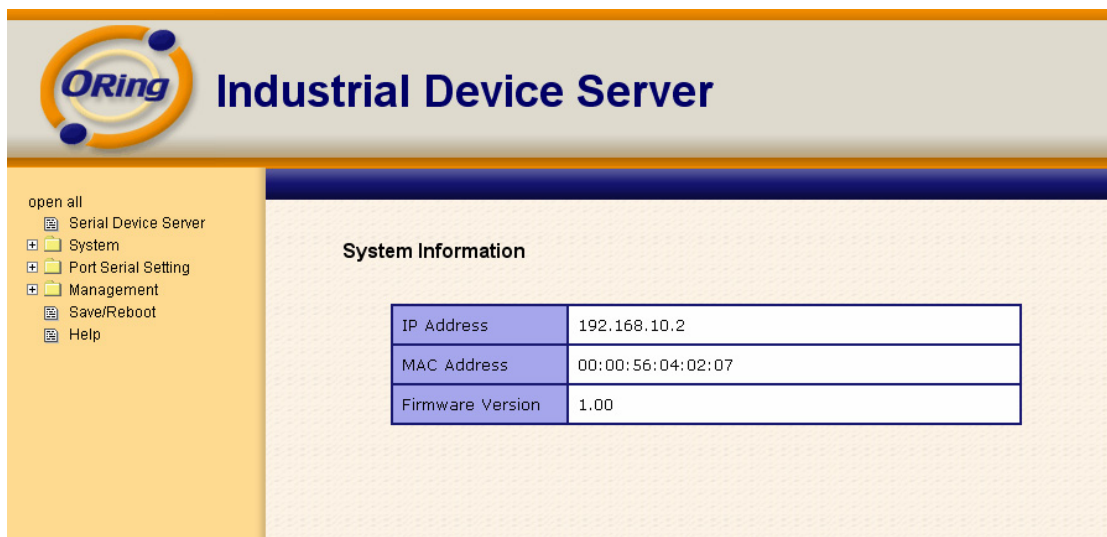


Figure 5-18 System information

5.2.1.1 System

Time (SNTP)

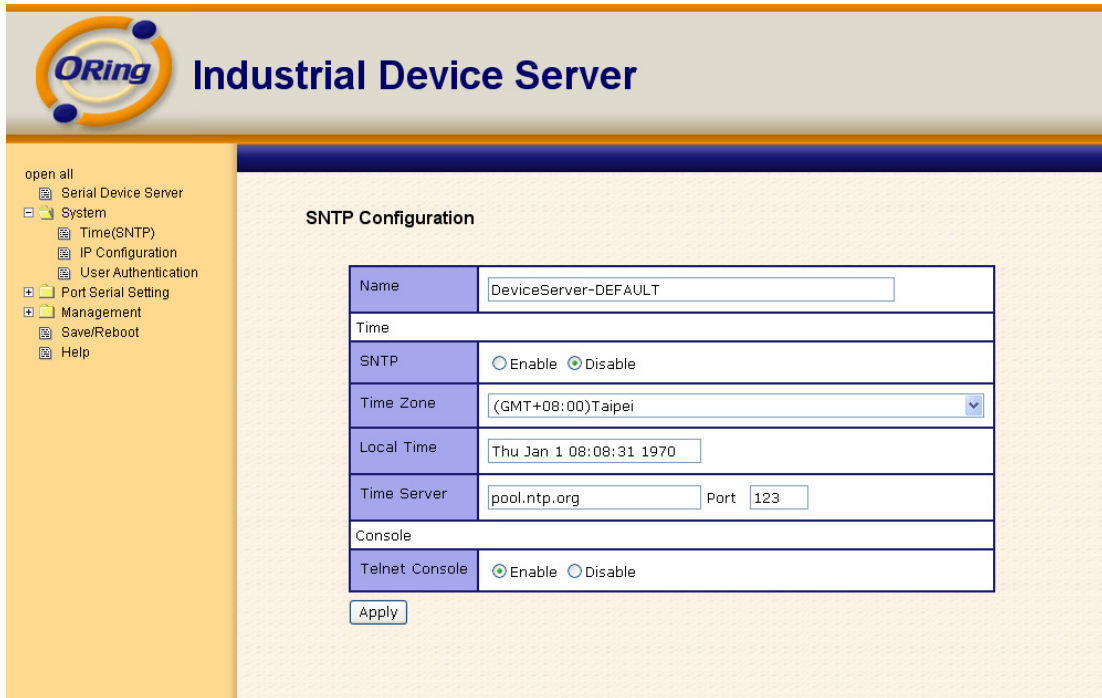


Figure 5-19 Time (SNTP)

The following table describes the labels in this screen.

Label	Description
Name	You can set the name of DS.
SNTP	Enable the SNTP server.
Time zone	After you set the SNTP enable, select the time zone you located.
Time server	Input SNTP server domain name or IP address and Port.
Console	Telnet Console (SSH) is included for security reasons. In some cases, you may need to disable this function to prevent unauthorized access from internet. The factory default is enable.

Table 5-12 Time (SNTP)



IP Configuration

You must assign a valid IP address for DS before attached in your network environment. Your network administrator should provide you with the IP address and related settings. The IP address must be unique and within the network (otherwise, DS will not have a valid connection to the network). You can choose from three possible “**IP configuration**” modes: Static, DHCP/BOOTP. The Factory Default IP address is “**192.168.10.2**”

ORing Industrial Device Server

open all

- Serial Device Server
- System
 - Time(SNTP)
 - IP Configuration
 - User Authentication
- Port Serial Setting
- Management
 - Save/Reboot
 - Help

IP Configuration

IP Configuration	Static
IP Address	192.168.10.2
Netmask	255.255.255.0
Gateway	192.168.10.1
DNS Server 1	192.168.10.1
DNS Server 2	
Auto IP Report	
Auto Report to IP	
Auto Report to TCP Port	0
Auto Report Interval	0 seconds
Ethernet Mode	
Ethernet Mode	<input checked="" type="radio"/> Redundant <input type="radio"/> Switch

Apply

Figure 5-20 IP configuration



The following table describes the labels in this screen.

Label	Description
DHCP/BOOTP	Obtain the IP address automatically from DHCP server.
Static IP Address	Assigning an IP address manually.
Subnet Mask	Set the subnet mask to communicate on the network.
Gateway	Enter the IP address of the router in you network.
DNS Server	Enter the IP address of the DNS server to translate domain names into IP address.
Auto IP Report	The device server will report its status periodically. At DS-Tool->IP collection option show the device server status. The report interval is 0 indicate disable this setting (default). But you can set the other IP or Port.

Table 5-13 IP configuration



Authentication


You can set the password to prevent unauthorized access from network. Input the “**Old password**” and “**New password**” to change the password. Factory default is no password.

User Authentication	
Old Password	<input type="text"/>
New Password	<input type="text"/>
Confirm New Password	<input type="text"/>

Figure 5-21 Authentication

5.2.1.2 Port serial setting

Serial configuration

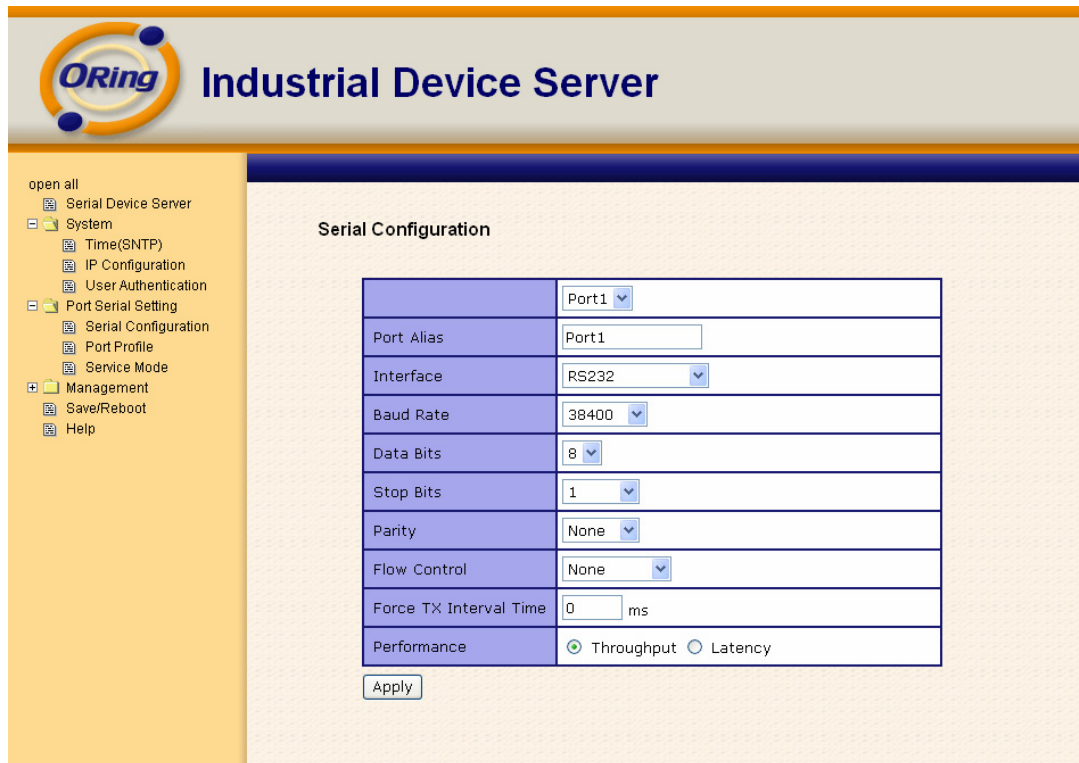

The screenshot shows the 'Serial Configuration' page in the ORing Industrial Device Server web interface. The page title is 'Serial configuration' and the header is 'ORing Industrial Device Server'. The left navigation menu includes 'Serial Device Server', 'System', 'Port Serial Setting', and 'Management'. The main content area is titled 'Serial Configuration' and contains a table of configuration options:

	Port1
Port Alias	Port1
Interface	RS232
Baud Rate	38400
Data Bits	8
Stop Bits	1
Parity	None
Flow Control	None
Force TX Interval Time	0 ms
Performance	<input checked="" type="radio"/> Throughput <input type="radio"/> Latency

An 'Apply' button is located below the configuration table.

Figure 5-21 Serial configuration

The following table describes the labels in this screen.

Label	Description
Port Alias	Remark the port to hint the connected device.
Interface	RS232 / RS422 / RS485(2-wires) / RS485(4-wires)
Baud rate	110bps/300bps/1200bps/2400bps/4800bps/9600bps/19200bps/ 38400bps/57600bps/115200bps/230400bps/460800bps
Data Bits	5, 6, 7, 8
Stop Bits	1, 2 (1.5)



Parity	No, Even, Odd, Mark, Space
Flow Control	No, XON/XOFF, RTS/CTS, DTR/DSR
Force TX Interval Time	Force TX interval time is to specify the timeout when no data has been transmitted. When the timeout is reached or TX buffer is full (4K Bytes), the queued data will be sent. 0 means disable. Factory default value is 0.
Performance	Throughput: This mode optimized for highest transmission speed. Latency: This mode optimized for shortest response time.
Apply	Activate settings on this page.

Table 5-14 Serial configuration

Port Profile

The screenshot shows the 'Port Profile' configuration page in the ORing Industrial Device Server web interface. The page title is 'Industrial Device Server' and the sub-page title is 'Port Profile'. On the left, there is a navigation menu with options like 'Serial Device Server', 'System', 'Port Serial Setting', 'Serial Configuration', 'Port Profile', 'Service Mode', 'Management', 'Save/Reboot', and 'Help'. The main configuration area contains a table with the following settings:

	Port1
Local TCP Port	4000
Command Port	4001
Mode	Serial to Ethernet
Flush Data Buffer After	0 ms
Delimiter(Hex 0~ff)	1: 00 2: 00 3: 00 4: 00
Mode	Ethernet to Serial
Flush Data Buffer After	0 ms
Delimiter(Hex 0~ff)	1: 00 2: 00 3: 00 4: 00

Below the table is an 'Apply' button.

Figure 5-21 Port Profile



The following table describes the labels in this screen.

Label	Description
Serial to Ethernet	<p>Flush Data Buffer After:</p> <p>The received data will be queued in the buffer until all the delimiters are matched. When the buffer is full (4K Bytes) or after "flush S2E data buffer" timeout, the data will also be sent. You can set the time from 0 to 65535 seconds.</p> <p>Delimiter:</p> <p>You can define max. 4 delimiters (00~FF, Hex) for each way. The data will be hold until the delimiters are received or the option "Flush Serial to Ethernet data buffer" times out. 0 means disable. Factory default is 0</p>
Ethernet to serial	<p>Flush Data Buffer After:</p> <p>The received data will be queued in the buffer until all the delimiters are matched. When the buffer is full (4K Bytes) or after "flush E2S data buffer" timeout, the data will also be sent. You can set the time from 0 to 65535 seconds.</p> <p>Delimiter:</p> <p>You can define max. 4 delimiters (00~FF, Hex) for each way. The data will be hold until the delimiters are received or the option "Flush Ethernet to Serial data buffer" times out. 0 means disable. Factory default is 0</p>

Table 5-15 Port Profile



Service Mode – Virtual COM Mode

In Virtual COM Mode, the driver establishes a transparent connection between host and serial device by mapping the Port of the serial server serial port to local COM port on the host computer. Virtual COM Mode also supports up to 5 simultaneous connections, so that multiple hosts can send or receive data by the same serial device at the same time.

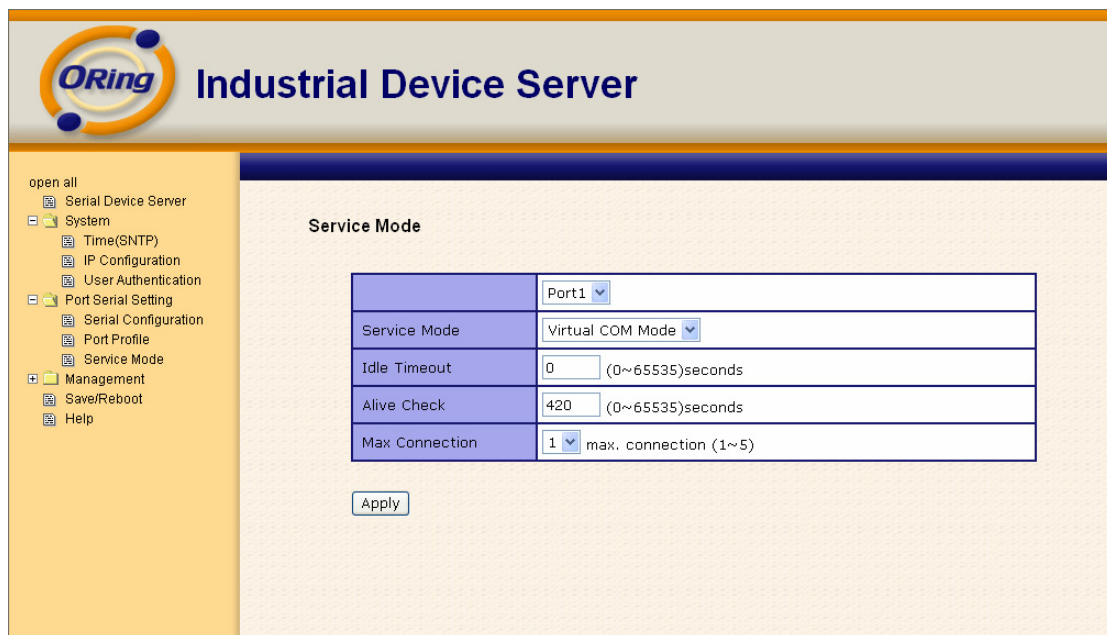


Figure 5-22 Virtual COM mode

The following table describes the labels in this screen.

Label	Description
Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.


Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.
Max Connection	The number of Max connection can support simultaneous connections are 5, default values is 1.

Table 5-16 Virtual COM mode

*Not allowed to mapping Virtual COM from web

Service Mode – TCP Server Mode

In TCP Server Mode, DS is configured with a unique Port combination on a TCP/IP network. In this case, DS waits passively to be contacted by the device. After the device establishes a connection with the serial device, it can then proceed with data transmission. TCP Server mode also supports up to 5 simultaneous connections, so that multiple device can receive data from the same serial device at the same time.

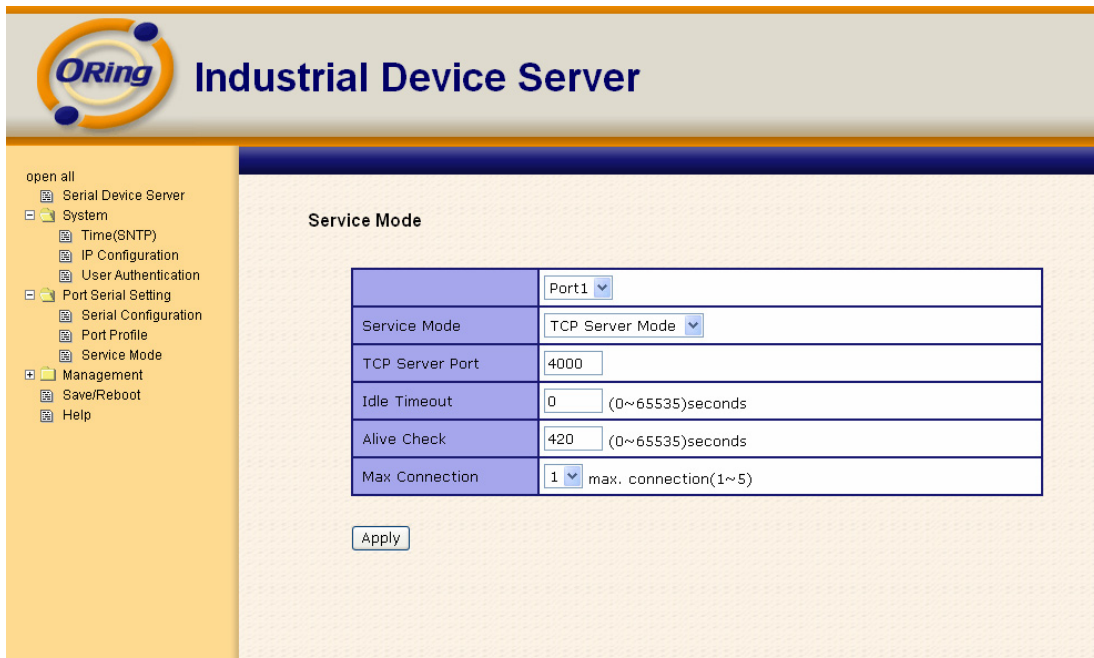

The screenshot shows the ORing Industrial Device Server web interface. The main content area is titled "Service Mode" and contains a configuration table with the following settings:

	Port1
Service Mode	TCP Server Mode
TCP Server Port	4000
Idle Timeout	0 (0~65535)seconds
Alive Check	420 (0~65535)seconds
Max Connection	1 max. connection(1~5)

Below the table is an "Apply" button.

Figure 5-23 TCP Server Mode



The following table describes the labels in this screen.

Label	Description
TCP Server Port	Set the port number for data transmission.
Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.
Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.
Max Connection	The number of Max connection can support simultaneous connections are 5, default values is 1.

Table 5-17 TCP server mode

Service Mode – TCP Client Mode

In TCP Client Mode, device can establish a TCP connection with server by the method you set (Startup or any character). After the data has been transferred, device can disconnect automatically from the server by using the TCP alive check time or Idle timeout settings.



Figure 5-24 TCP client mode

The following table describes the labels in this screen.

Label	Description
Destination Host	Set the IP address of host and the port number of data port.
Idle Timeout	When serial port stops data transmission for a defined period of time (Idle Timeout), the connection will be closed and the port will be freed and try to connect with other hosts. 0 indicate disable this function. Factory default value is 0. If Multilink is configured, only the first host connection is effective for this setting.
Alive Check	The serial device will send TCP alive-check package in each defined time interval (Alive Check) to remote host to check the TCP connection. If the TCP connection is not alive, the connection will be closed and the port will be freed. 0 indicate disable this function. Factory default is 0.
Connect on Startup	The TCP Client will build TCP connection once the connected serial device is started.



Connect on Any Character	The TCP Client will build TCP connection once the connected serial device starts to send data.
--------------------------	--

Table 5-18 TCP client mode

Service Mode – UDP Client Mode

Compared to TCP communication, UDP is faster and more efficient. In UDP mode, you can Uni-cast or Multi-cast data from the serial device server to host computers, and the serial device can also receive data from one or multiple host

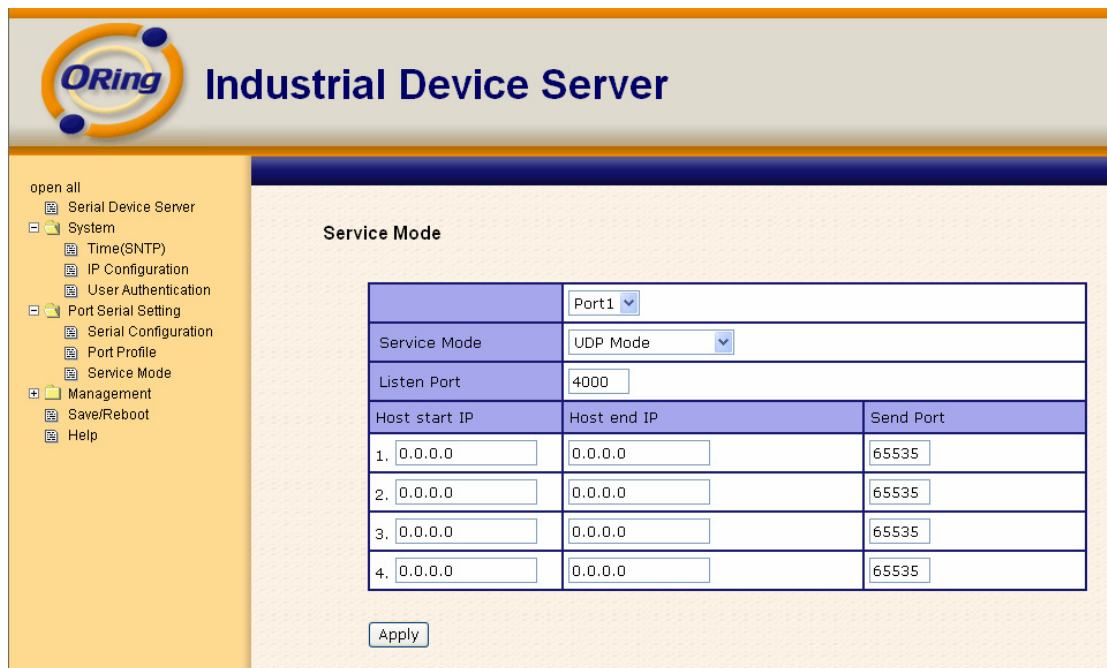



Figure 5-25 UDP client mode

5.2.1.3 Management

Access IP Control

Access IP Control Settings allow you to add or block the remote host IP addresses to prevent unauthorized access. If host's IP address is in the accessible IP table, then the host will be allowed to access the DS. You can choose one of the following cases by setting the parameter.

1. Only one host with a special IP address can access the device server, "IP address /255.255.255.255" (e.g., "192.168.0.1/255.255.255.255").
2. Hosts on a specific subnet can access the device server. "IP address/255.255.255.0" (e.g., "192.168.0.2/255.255.255.0")
3. Any host can access the device server. Disable this function by un-checking the "Enable IP Filter" checkbox

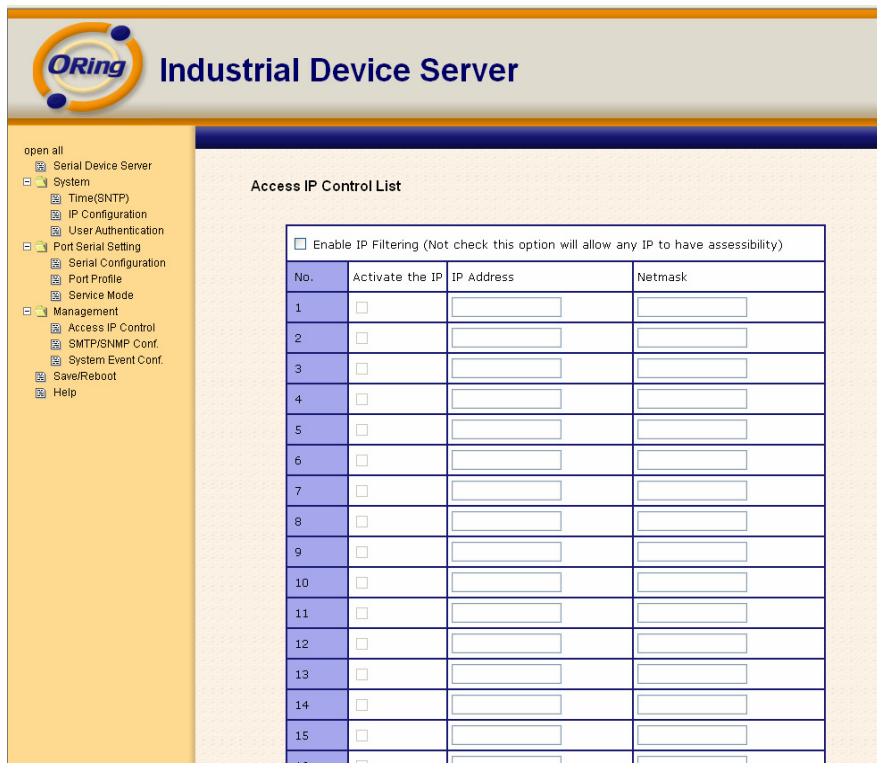

The screenshot shows the web interface for the ORing Industrial Device Server. The page title is "Industrial Device Server". On the left is a navigation menu with categories like "Serial Device Server", "System", "Port Serial Setting", "Serial Configuration", "Service Mode", "Management", and "Help". The "Management" section is expanded, showing "Access IP Control" as the selected option.

The main content area is titled "Access IP Control List". At the top of this area is a checkbox labeled "Enable IP Filtering (Not check this option will allow any IP to have assessibility)". Below this is a table with 16 rows and 4 columns: "No.", "Activate the IP", "IP Address", and "Netmask". Each row contains a number from 1 to 16, an unchecked checkbox, and empty input fields for the IP address and netmask.

No.	Activate the IP	IP Address	Netmask
1	<input type="checkbox"/>		
2	<input type="checkbox"/>		
3	<input type="checkbox"/>		
4	<input type="checkbox"/>		
5	<input type="checkbox"/>		
6	<input type="checkbox"/>		
7	<input type="checkbox"/>		
8	<input type="checkbox"/>		
9	<input type="checkbox"/>		
10	<input type="checkbox"/>		
11	<input type="checkbox"/>		
12	<input type="checkbox"/>		
13	<input type="checkbox"/>		
14	<input type="checkbox"/>		
15	<input type="checkbox"/>		
16	<input type="checkbox"/>		

Figure 5-26 Access IP



SMTP/SNMP Conf

Email Server configuration includes the mail server's IP address or domain. If the authentication is required, specify your name and password. There are 4 Email addresses that you can specify to receive the notification.

SNMP Server configuration includes the SNMP Trap Server IP address, Community, Location and Contact. There are 4 SNMP addresses you can specify to receive the notification.

SysLog server configuration includes the server IP and server Port. This option need to use with DS-Tool.

The screenshot shows the 'SMTP/SNMP Configuration' page in the ORing Industrial Device Server web interface. The left sidebar contains a navigation tree with the following items: open all, Serial Device Server, System (Time(SNTP), IP Configuration, User Authentication), Port Serial Setting (Serial Configuration, Port Profile, Service Mode), Management (Access IP Control, SMTP/SNMP Conf., System Event Conf., Save/Reboot, Help). The main content area is titled 'SMTP/SNMP Configuration' and contains the following configuration fields:

E-mail Settings	
SMTP Server	<input type="text"/> Port <input type="text"/>
<input type="checkbox"/> My server requires authentication	
User Name	<input type="text"/>
Password	<input type="text"/>
E-mail Sender	<input type="text"/>
E-mail Address 1	<input type="text"/>
E-mail Address 2	<input type="text"/>
E-mail Address 3	<input type="text"/>
E-mail Address 4	<input type="text"/>
SNMP Trap Server	
SNMP Server 1	<input type="text"/>
SNMP Server 2	<input type="text"/>
SNMP Server 3	<input type="text"/>
SNMP Server 4	<input type="text"/>

Figure 5-27SMTP / SNMP conf

System Event Conf.

Specify the events that should be notified to the administrator. The events can be alarmed by E-mail, SNMP trap, or system log.



Figure 5-28 SMTP / SNMP conf

The following table describes the labels in this screen.

Label	Description
Hardware Reset (Cold Start)	This refers to starting the system from power off (contrast this with warm start). When performing a cold start, DS will automatically issue an Auto warning message by sending E-mail, log information or an SNMP trap after booting.



Software Reset (Warm Start)	This refers to restart the computer without turning the power off. When performing a warm start, DS will automatically send an E-mail, log information or SNMP trap after reboot.
Login Failed	When an unauthorized access from the Console or Web interface, a notification will be sent.
IP Address Changed	When IP address of device changed, a notification will be sent.
Password Changed	When password of device changed, a notification will be sent.
Access IP Blocked	When the host accesses the device with blocked IP addresses, a notification will be sent.
Redundant Power Change	When status of power changed, a notification will be sent.
Redundant Ethernet Change	When status of Ethernet port changed, a notification will be sent.
DCD changed	When DCD (Data Carrier Detect) signal changes, it indicates that the modem connection status has been changed. A Notification will be sent.
DSR changed	When DSR (Data Set Ready) signal changes, it indicates that the data communication equipment is powered off. A Notification will be sent.
RI changed	When RI (Ring Indicator) signal changes, it indicates an incoming call. Notification will be sent.
CTS changed	When CTS (Clear To Send) signal changes, it indicates that the transmission between computer and DCE can proceed. A notification will be sent.
Port connected	In TCP Server Mode, when the device accepts an incoming TCP connection, this event will be trigger. In TCP Client Mode, when the device has connected to the remote host, this event will be trigger. In Virtual COM Mode, Virtual COM is ready to use. A notification will be sent.
Port disconnected	In TCP Server/Client Mode, when the device lost the TCP link, this event will be trigger. In Virtual COM Mode, When Virtual COM is not available, this event will be trigger. A notification will be sent.
Power 1 Fault	When Power 1 Fault, a notification will be sent and the Fault LED will be lighted.
Power 2 Fault	When Power 2 Fault, a notification will be sent and Fault LED will be lighted.

Eth1 link down	When Eth1 link down, a notification will be sent and Fault LED will be lighted.
Eth2 link down	When Eth2 link down, a notification will be sent and Fault LED will be lighted.

Table 5-19 System event conf

5.2.1.4 Save/Reboot

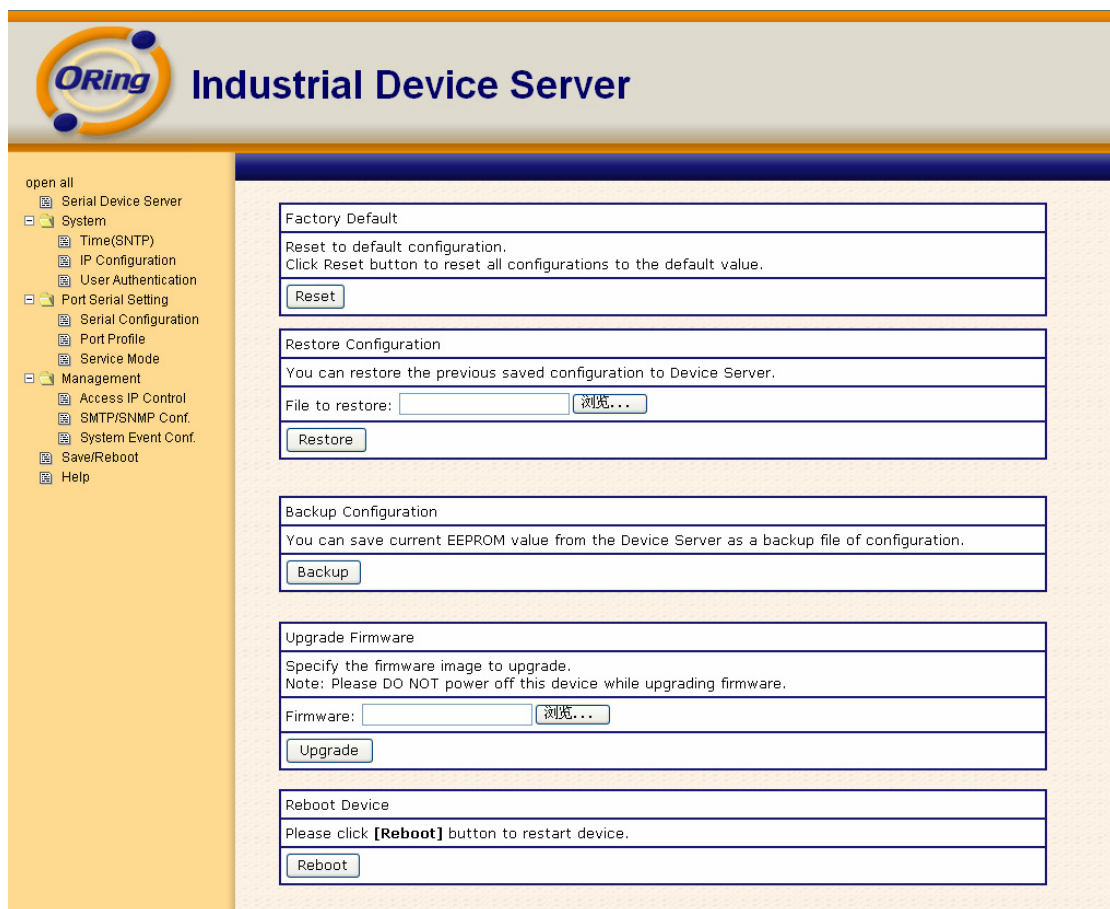


Figure 5-29 Save / Reboot



The following table describes the labels in this screen.

Label	Description
Factory Default	Load default configuration except settings of Network. If you want load all factory default, you should press "Reset" button about the five seconds on the device (Hardware restore).
Restore Configuration	Restore the previous exported configuration.
Backup Configuration	Export the current configuration to a file.
Upgrade Firmware	Upgrade to a new firmware with specified file.
Reboot Device	Reboot the device server (warm start).

Table 5-20 Save / Reboot

5.3 Configuration by SSH Console

5.3.1 Connect to DS

You can use SSH Tool (e.g., PUTTY) to access SSH console of DS. The SSH console interface is shown below.

```
login as: admin
admin@192.168.0.39.'s password:
*****
*** ORING Industrial Serial Device Server Commander ***
*****
-----
[ORING Industrial Serial Device Server Commander]
1. Overview
2. General Settings
3. Network Settings
4. Ports settings
5. Security(Accessible IP) Settings
6. Notification(Auto Warning) Settings
C. Change Password
L. Load Factory Default
S. Save configuration
R. Reboot
Q. Exit & Logout
Select one function (1-6,C,L,S,R,Q): █
```

Figure 5-30 SSH



Technical Specifications

Network Interface	
Fiber Port	1x 100Base-FX with SC connector Multi-Mode: Distance: 2km Wavelength: 1310nm Cable: 50/125 um , 62.5/125 um Single-Mode: Distance: 30km Wavelength: 1310nm Cable: 9/125 um
Protocols	ICMP, IP, TCP, UDP, DHCP, BOOTP, ARP/RARP, DNS, SNMP MIB II, HTTPS, SSH
Serial Interface	
Interface	1x RS232 / RS422 / 4(2)-Wire RS485. Which can be configured by DS-Tool
Connector	Male DB9
Serial Baud Rate	110 bps to 460.8 Kbps
Data Bits	5, 6, 7, 8
Parity	odd, even, none, mark, space
Stop Bits	1, 1.5, 2
RS-232 signals	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND (IDS-5011F/IDS-5011F+)
RS-422 signals	Tx+,Tx-, Rx+, Rx-,GND
RS-485 (4 wire) signals	Tx+,Tx-, Rx+, Rx-,GND
RS-485 (2 wire) signals	Data+, Data-,GND



Flow control	XON/XOFF, RTS/CTS, DTR/DSR
Serial Line Protection	Built-in15KV ESD protection
LED Indicators	<p>PWR (1)(2) / Ready:</p> <p>1) Red On: Power is on and booting up. Red Blinking: Indicates an IP conflict, or DHCP or BOOTP server did not respond properly.</p> <p>2) Green On: Power is on and functioning normally. Green Blinking: Located by Administrator.</p> <p>Fiber Link / ACT:</p> <p>Orange ON/Blinking: 10 Mbps Ethernet Green ON/Blinking:100 Mbps Ethernet</p> <p>Serial TX / RX LEDES:</p> <p>Red: Serial port is receiving data Green: Serial port is transmitting data.</p>
Power Requirements	
Power Input	<p>PWR1: 12 ~ 48VDC in power jack PWR1: 12 ~ 48VDC in 3-pin Terminal Block</p>
Reverse Polarity Protection	Present at terminal block
Power Consumption	4 Watts MAX
Software Utility	
Utility	<p>DS-Tool for Windows NT/2000/XP/ 2003/VISTA which include</p> <p>Device discovery Auto IP report Device setting (run-time change, no rebooting) Access control list Group setting Device monitoring Serial port monitoring Log info Group Firmware update</p>
Serial Mode	Virtual Com / TCP Server / TCP Client / UDP /Serial Tunnel



	TCP Alive Check Timeout Inactivity Timeout Delimiter for Data Packing Force TX Timeout for Data Packing
Multiple Link	5 Hosts simultaneous connection: Virtual Com / TCP server / TCP Client / UDP
VCOM Driver	Windows NT/2000/XP/2003/VISTA
Configuration	Web HTTPS console, SSH console, Console Command DS-Tool for Windows NT/2000/XP/VISTA
Environmental	
Operating Temperature	-10 to 60°C (14 to 140°F)
Operating Humidity	5% to 95%(Non-condensing)
Storage Temperature	-20 to 85°C (-4 to 185°F)
Mechanical	
Dimensions(W x D x H)	72mm(W)x125mm(D)x31mm(H)
Casing	IP-30 protection
Regulatory Approvals	
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS) EN61000-4-4 (EFT) EN61000-4-5 (Surge) EN61000-4-6 (CS)
Warranty	5 years