iQ7-US15W

Q7 CPU module with Intel® Atom™ processor Z510/530

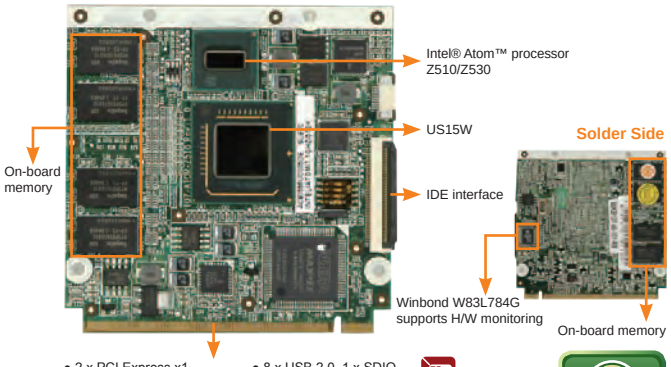

Features

1. Intel® Atom™ processor Z510/Z530 low power CPU with single 5V low power design
2. High graphic performance supports H.264, MPEG1/2/4, VC1/WMV9 high-definition decode
3. Single-channel 24-bit LVDS supported
4. On-board memory 1GB supported
5. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU
  Intel® Atom™ processor Z530 1.6GHz with a 533MHz FSB
  Intel® Atom™ processor Z510 1.1GHz with a 400MHz FSB
- ◆ System Chipset
  Intel® US15W
- ◆ BIOS
  AMI BIOS
- ◆ System Memory
  On-board 1GB DDR2 SDRAM supported
- ◆ I/O Interface
  8 x USB 2.0 (to baseboard)
  1 x IDE (on CPU module)
  1 x LPC bus (to baseboard)
  1 x Single-channel 18/24-bit LVDS (to baseboard)
  1 x SDIO (to baseboard)
  1 x SDVO (to baseboard)
  1 x SMBUS (to baseboard)
- ◆ Expansion
  2x PCIe x1 (to baseboard)
- ◆ Audio
  1 x HD Audio interface (to baseboard)
- ◆ HW Monitor
  Winbond W83L784G
- ◆ Display Interface
  Intel® Graphics Media Accelerator 500
  SDVO/single-channel 24-bit LVDS Integrated in Intel® US15W (to baseboard)
  Max Display Resolution:
  LVDS: 1366x768 (24-bit color)
  SDVO: 1280 x 1024
- ◆ Watchdog Timer
  Software programmable supports 1~255sec. system rest by Winbond W83L784G
- ◆ Power Supply
  5V only AT/ATX supported
- ◆ Power Consumption
  5V@1.34A (Intel® Atom™ Z530 1.6GHz with 1GB DDR2)
  5V@1.255A (Intel® Atom™ Z510 1.1GHz with 1GB DDR2)
- ◆ Operating Temperature
  0°C ~ 60°C
- ◆ Storage Temperature
  -10°C ~ 70°C
- ◆ Operating Humidity
  5% ~ 95%, non-condensing
- ◆ Dimensions: 70 mm x 70 mm
- ◆ Weight: GW: 600g/NW: 100g

Dimensions *(mm)*

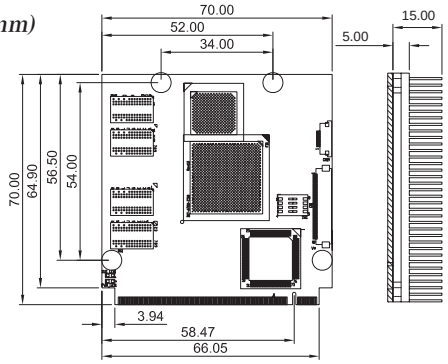

Packing List

1 x Q7 CPU module	
1 x 50mm 1.8" IDE HDD FFC cable (P/N: 32400-029002-RS)	
1 x Heatsink	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
iQ7-US15W-Z510-R10	Q7 module with Intel® Atom™ Z510 1.1GHz, SDVO/LVDS, USB, SD, IDE, on board 1GB memory
iQ7-US15W-Z530-R10	Q7 module with Intel® Atom™ Z530 1.6GHz, SDVO/LVDS, USB, SD, IDE, on board 1GB memory
iQ7-DB-MITX-R10	Mini-ITX form factor baseboard for Q7 module, RoHS
32400-307900-RS	15cm 1.8" IDE FFC cable

iQ7-DB-MITX

Baseboard for Q7 modules

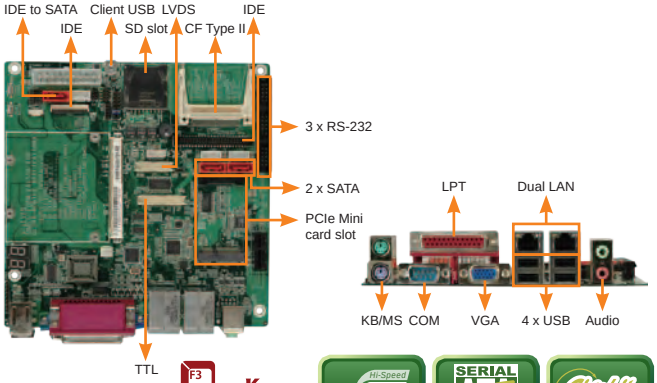

Features

1. Mini-ITX form factor baseboard for Q7 platform
2. Support audio, SD slot, IDE, CF Type II, single-channel LVDS, TTL
3. Support six USB, four COM, two SATA
4. Support PCIe x1 slot, one PCIe Mini card

Specifications

- ◆ Display Interface
  VGA DB15 connector (SDVO to VGA by Chrontel CH7317B)
  18/24-bit single-channel LVDS
  TTL (LVDS to TTL by TI SN75LVDS) (Option)
- ◆ Expansion Slot
  1 x PCIe Mini card slot shared with LAN1 (selected by switch: SW3)
  1 x PCIe x1 slot shared with LAN2 (selected by switch: SW3)
- ◆ I/O Interface
  2 x SATA/SATA 3Gb/s with 5V/12V power output (not support by iQ7-US15W)
  1 x IDE (IDE signal support from iQ7-US15W)
  1 x CF Type II (signal support from iQ7-US15W)
  1 x SATA with 5V/12V power output (IDE to SATA Bridge: Jmicron JM20330 Signal support from iQ7-US15W)
  1 x SD Slot — 2 x PS2 KB/MS
  6 x USB 2.0 — 1 x USB Client
  1 x LPT — 4 x RS-232
- ◆ Audio
  Realtek ALC883 for 7.1 channels HD Audio
  1 x Mic-in, Line-out connector
- ◆ Ethernet
  2 x Realtek RTL8111CP GbE chipsets
  LAN1 shared with PCIe Mini card slot (selected by switch: SW3)
  LAN2 shared with PCIe x1 Slot (selected by switch: SW3)
- ◆ Super I/O
  SMSC SCH3114-NU
- ◆ Digital I/O
  8-bit digital I/O, 4-bit input/4-bit output by SMSC SCH3114-NU
- ◆ Infrared Interface
  N/A
- ◆ Power Supply
  ATX Power, ATX/AT Mode Support
- ◆ Operating Temperature
  0°C ~ 60°C (32°F ~ 140°F)
- ◆ Storage Temperature
  -10°C ~ 70°C
- ◆ Operating Humidity
  5% ~ 95%, non-condensing
- ◆ Dimensions: 170 mm x 170 mm
- ◆ Weight: GW: 700g/NW: 350g

Dimensions *(mm)*

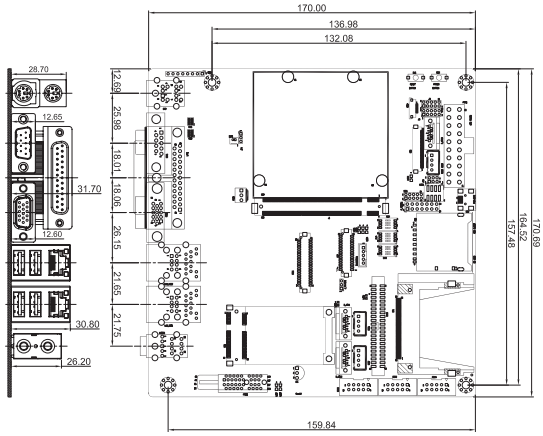

Packing List

1 x Mini-ITX form factor baseboard for Q7 module	
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
iQ7-DB-MITX-R10	Mini-ITX form factor baseboard for Q7 module
19800-000051-RS	Dual RS-232 cable
19800-000047-RS	Single RS-232 cable
32400-029000-RS	15cm IDE FFC cable from Q7 module to baseboard
32400-029002-RS	5cm IDE FFC cable from Q7 module to baseboard