


包裝方式:

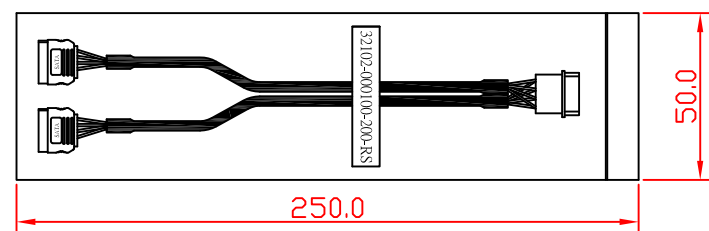

P1	P2	P3	Color
13+14+15	1	13+14+15	Yellow
10+11+12	2	10+11+12	Black
7+8+9	4	7+8+9	Red
4+5+6	3	4+5+6	Black
1+2+3	N/A	1+2+3	N/A

⑥	H.S.T	Color: black,OD=6.0MM.		
⑤	TERMINAL	CKM50820301		
④	HOUSING	CKM50820101-04.		
③	Outside molded	PVC 45P, Color: Black.		
②	Connector	SATA 15PIN Female,Inside black,PIN Gold flash ,solder type.		
①	WIRE	UL1007 18AWG 80°C 300V, COLOR:Black, Red,Yellow.		
NO.	NAME	DESCRIPTION		
成品料號		KS030A01H004-001	成品圖號	K30-0170-001
X ±	X° ±	NAME:	福保精密電子有限公司 Wins Precision Electronics Co., Ltd.	
.X ±	.X° ±	C24		
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:
本圖面規格屬 福保公司所有 未經許可不得翻印		mm	32102-000100-200-RS	SATA 15PIN F*2/4P HSG
		Amy	楊潔	陳方軍
		2009/08/14	2009/08/14	2009/08/14
		APPD BY	CHECK BY	DRAWN BY
		SCALE	SHEET	REV.
		NONE	1/1	A1

要求:

- 成品需100%進行測試，不得有短路、斷路、絕緣等不良情形；
 - 電氣特性:
 - (1) DC 測試: 300V, 絕緣阻抗: 10M ohm/Min, 導通阻抗: 5ohm/Max.
- ⚠️ 套管需烘中間段，兩頭不需烘烤，需單PCS包裝且在外袋上貼一料號標籤：32102-000100-200-RS，包裝袋使用L*W=250*50MM規格。