

FSP150AHAN1

150 W AC/DC Adapter



Plug Type: Power mini-DIN (4P)

****Meet ErP**



Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 12.5 A
- Output Watts: 150 W
- Efficiency: 87%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 80°C

Optional Cable



PN: CB-MD4P4-RS
16 cm cable for power mini-DIN connector adapter

Dimensions (Unit: mm)

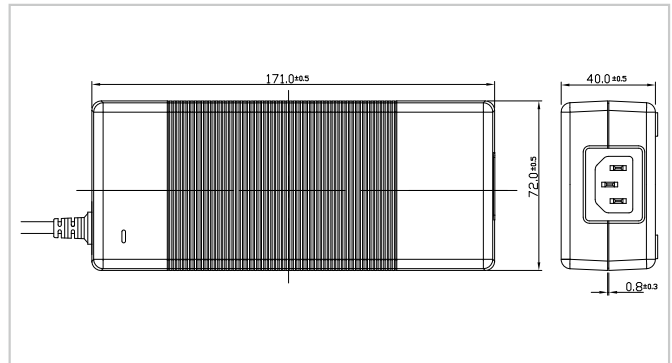


Ordering Information

Part No.	Description
63000-FSP150AHAN1808-RS	12V 150W power adapter with DIN 4-pin+LOCK 90-264 VAC input, ErP

FSP120AAB

120W AC/DC Adapter



Plug Type: Power mini-DIN (4P)

****Meet ErP**



Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 19 V
- Output Current: 6.32 A
- Output Watts: 120 W
- Efficiency: 86%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -40°C ~ 85°C

Optional Cable



PN: CB-MD4P4-RS
16 cm cable for power mini-DIN connector adapter

Dimensions (Unit: mm)

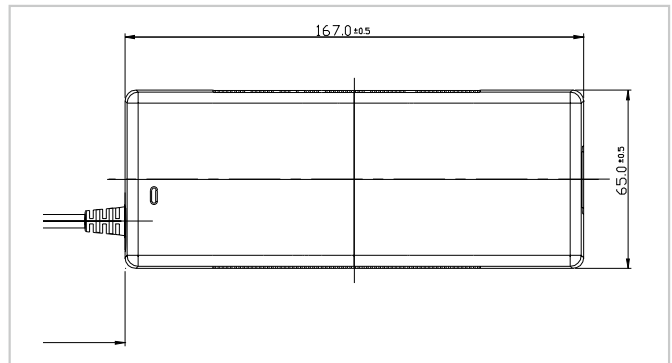

Ordering Information

Part No.	Description
63000-FSP120AAB-RS	19 V 120W Power adapter, 90-264 VAC input

63040-010096

96W AC/DC Adapter



Plug Type: øin 2.5 mm / øout 5.5 mm

****Meet ErP**



Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 8 A
- Output Watts: 96 W
- Efficiency: 87%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -30°C ~ 60°C

Optional Cable



PN: CB-MD4P4-RS
16 cm cable for power mini-DIN connector adapter

Dimensions (Unit: mm)

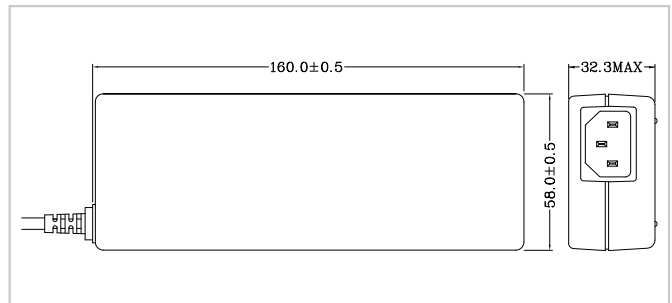

Ordering Information

Part No.	Description
63040-010096-010-RS	12V 96W power adapter with Din 4-pin/lock 90-264 VAC input, ErP

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/ Peripherals

7

Panel Solutions Introduction