


PR-1300G 3-slot Half-size Compact Chassis

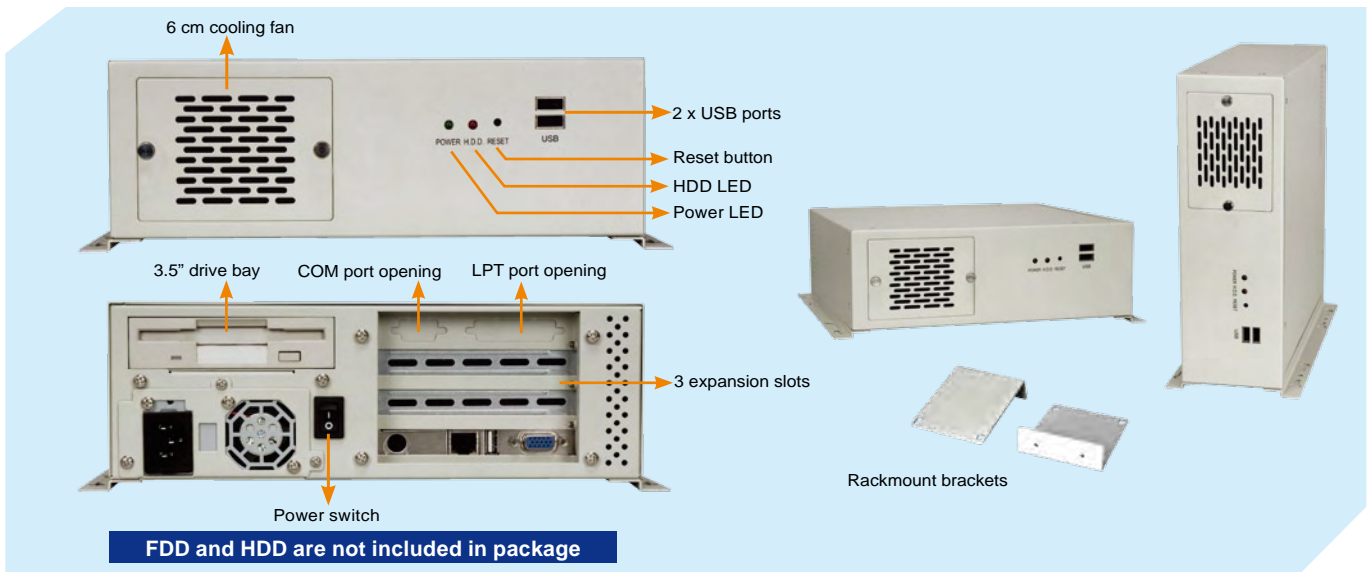

Features

- ◆ RoHS compliant design
- ◆ One 3.5" drive bay
- ◆ Two USB ports on the front panel
- ◆ One, 6 cm cooling fan


Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" (front accessible / HDD)
◆ Cooling Fans	1 x 6 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT , 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C-50°C
◆ Operation Humidity	10% - 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2.6 kg / 5.2 kg
◆ Dimensions (DxWxH)	254 mm x 265 mm x 95.5 mm

Ordering Information

Part No.	Description
PR-1300GW-R11/ACE-916AP/BP-3S	3-slot Half-size chassis, white, with ACE-916AP-RS and BP-3S-RS-R30, RoHS
PR-1300GW-R11/ACE-916AP/IP-3S	3-slot Half-size chassis, white, with ACE-916AP-RS and IP-3S-RS-R30, RoHS
PR-1300GW-R11/A618A	3-slot Half-size Compact Chassis, White, 1 x 6cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

Dimensions (measurement units: millimeter)

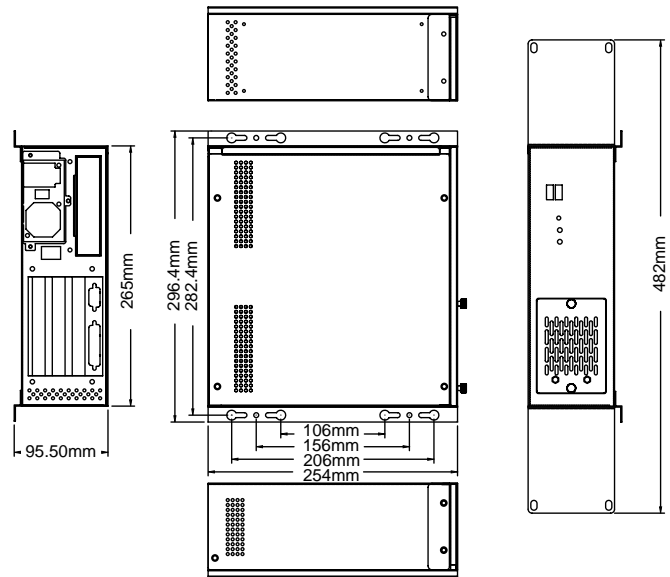

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS	ISA	0	3	0	0	0	AT
IP-3S-RS	PCISA	2	0	0	0	0	AT
IP-3SA-RS	PCISA	2	0	0	0	0	ATX
HPE-3S1	PICO/PIC0e	2	0	0	0	0	ATX
HPE-3S2	PICO/PIC0e	1	0	0	1	0	ATX

Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PR-1300G can support single 1U height PSU. For more models of IEI PSU, please refer to section 7 or visit www.ieiworld.com.

- 1 Industrial Computing Solutions
- 2 Video Capture Solutions
- 3 Embedded Computing Solutions
- 4 Industrial Data Collector and Controller
- 5 Panel Solutions Introduction
- 6 O-Ring Network Communication