

TAR-120-M12

➤ Industrial EN50155 IEEE 802.11 b/g Cellular VPN Router with 2x10/100Base-T(X), M12 connector, Cellular modem included

Features

- Leading EN50155-compliant wireless cellular VPN router for rolling stock applications
- Dual high Speed Air Connectivity: WLAN interface supports up to 54Mbps link speed
- Highly Security Capability: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- Secured Management by HTTPs
- Various kind of WAN Connection Type supported: Dynamic/Static IP, PPPoE, Modem dial-up
- IP table configurable to prevent access from unauthorized IP address
- Supports VPN for secured network connection (Open VPN , PPTP VPN)
- Supports NAT Setting (Virtual Server , Port Trigger , DMZ , UPnP)
- Supports DHCP forwarding through PPTP function
- 3.5G HSDPA Modem dial-up included
- Dual redundant Ethernet ports support Ethernet redundant mode (Recovery time < 10ms) and switch mode in M12 connector (D-coding)
- Wireless connecting status monitoring
- Event Warning by Syslog, Email, SNMP Trap and Relay output
- Ultra-rugged enclosure for toughest industrial usages
- Wall mounting enabled


Preliminary




Introduction

ORing's Transporter series cellular VPN router is designed for industrial and rolling stock wireless applications, such as vehicle, and railway applications. TAR-120-M12 is reliable IEEE802.11 b/g router with 2 ports LAN which is fully compliant with EN50155 certification. It supports 802.1X and MAC filter for security control. It can be configured to operate in 3 modes of routing function: Dynamic/Static IP route, PPPoE authentication, and Cellular Modem dial-up. Users can set up WLAN environment to fulfill demands of various applications rapidly by dialing up cellular modem. TAR-120-M12 EN50155 cellular VPN router use M-series connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. TAR-120-M12 provides dual Ethernet ports in switch mode, so that you can use Daisy Chain to reduce the usage of Ethernet switch ports. Therefore, TAR-120-M12 is one of the most reliable choices for rolling stock applications on the wireless network.

Application

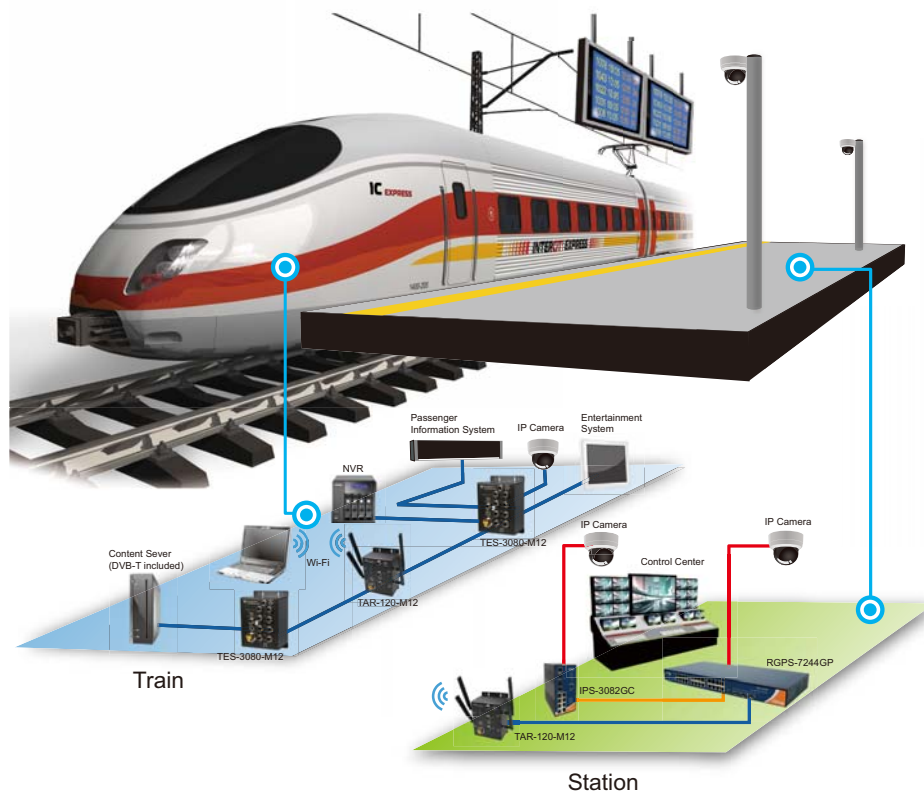

Dimensions

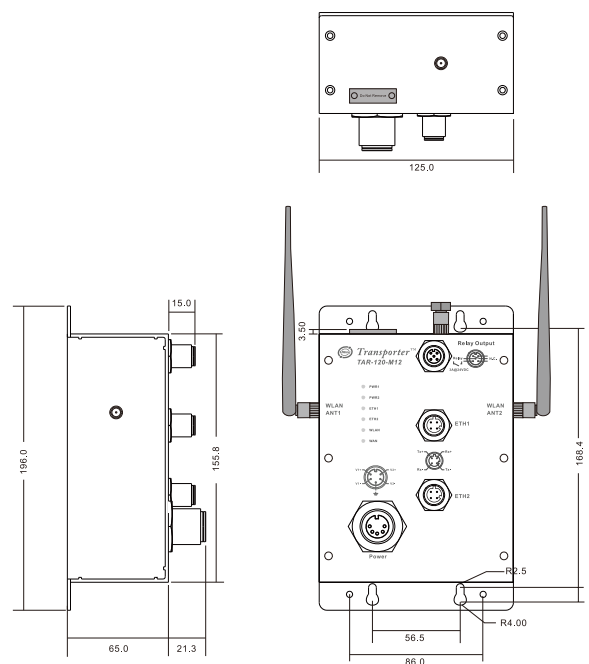

Unit=mm

Specifications

ORing EN50155 WLAN Access Point Router Model	TAR-120-M12
Physical Ports	
10/100Base-T(X) Ports in RJ45 Auto MDI/MDIX	2 (M12 connector – D coding)
WLAN Interface	
WAN Connection Type	Static/Dynamic IP, PPPoE, 3G Modem dial-up
Antenna and Connector	2 x 2 dBi (b/g mode) on Reverse SMA connector 2 x 2 dBi (Cellular modem) on Reverse SMA connector
Radio Frequency Type	DSSS, OFDM
Modulation	IEEE802.11b: CCK, DQPSK, DBPSK IEEE802.11g: OFDM with BPSK, QPSK, 16QAM, 64QAM
Frequency Band	America / FCC: 2.412~2.462 GHz (11 channels) Europe CE / ETSI: 2.412~2.472 GHz (13 channels)
Transmission Rate	IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps
Transmit Power	IEEE802.11b/g: 20dBm max
Receiver Sensitivity	-81dBm @ 11Mbps, PER< 8%; -64dBm @ 54Mbps, PER< 10%
Encryption Security	WEP: (64-bit, 128-bit key supported) WPA/WPA2 :802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) 802.1X Authentication supported TKIP encryption
Wireless Security	SSID broadcast disable
Protocol Support	
Protocol	ARP, BOOTP, DHCP, DNS, HTTP, IP, ICMP, SNMP, TCP, UDP, RADIUS, SNMP, PPPoE, STP (IEEE 802.1D)
LED Indicators	
Power Indicator	Green for Power indicator
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/ Act at 100Mbps. Amber for port Link/ Act at 10Mbps.
WLAN LEDs	Green for WLAN Link/ Act
Cellular modem LED	Green for Cellular modem Link/ Act
Fault Contact	
Relay	Relay output to carry capacity of 3A at 24VDC
Power	
Redundant Input Power	Dual Power Inputs. 12~48 VDC on M23 connector (24 VDC Typ.)
Power Consumption	5.8 W
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristics	
Enclosure	IP-40
Dimensions (W x D x H)	125(W) x 65(D) x 196(H) mm (4.92 x 2.56 x 7.72 inch.)
Weight (g)	950 g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-20 to 70°C (-4 to 158°F)
Operating Humidity	5% to 95% Non-condensing

Regulatory Approvals

EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2)
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27, EN61373
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6, EN61373
Cooling	EN60068-2-1
Dry Heat	EN60068-2-2
Safety	EN60950-1
Warranty	3 years

Ordering Information

TAR-**AB**0-M12

Code Definition	Wireless Mode	10/100Base-T(X) Port Number
Option	- 1: IEEE 802.11 b/g - 2: IEEE 802.11 a - 3: IEEE 802.11 a/b/g - 4: IEEE 802.11 b/g/n - 5: IEEE 802.11 a/n - 6: IEEE 802.11 a/b/g/n	- "2" : 2 ports

	Model Name	Description
Available Model	TAR-120-M12_US	Industrial EN50155 IEEE 802.11 b/g cellular VPN router with 2x10/100Base-T(X), M12 connector, Cellular modem included, US band
	TAR-120-M12_EU	Industrial EN50155 IEEE 802.11 b/g cellular VPN router with 2x10/100Base-T(X), M12 connector, Cellular modem included, EU band
Packing List <ul style="list-style-type: none"> TAR-120-M12 Antenna ORing Tool CD Quick Installation Guide 		Optional Accessories (Can be purchased separately) <ul style="list-style-type: none"> DR-45 series : 45 Watts power supply DR-75 series : 75 Watts power supply DR-120 series : 120 Watts power supply WLAN RF Antenna series RF Antenna Base series RF Cable series