

# 63040-010060

60 W AC/DC Adapter



**New**



Plug Type: øin 2.5 mm / øout 5.5 mm

**\*\*Meet ErP**



## Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 87%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 65°C

## Optional Cable



PN: CB-P1LP4-RS  
20 cm cable for 5.5 x 2.5 DC Plug with screw

## Dimensions (Unit: mm)

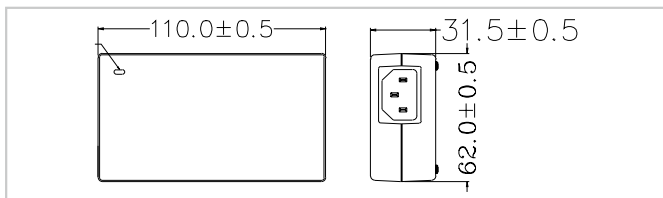


## Ordering Information

Part No.	Description
63040-010060-040-RS	12 V 60W power adapter with lock screw 90~264 VAC input, ErP
63040-010060-030-RS	12V 60W power adapter with none lock 90~264 VAC input, ErP

# FSP036RAB

36W AC/DC Adapter

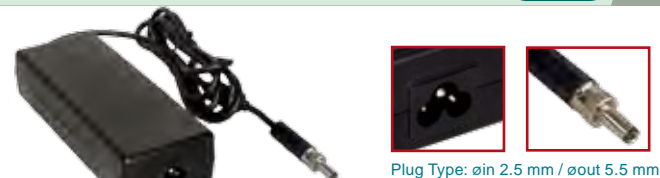

Plug Type: øin 2.5 mm / øout 5.5 mm

**\*\*Meet ErP**



## Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 3 A
- Output Watts: 36 W
- Efficiency: 84.7%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 80°C

## Optional Cable



PN: CB-P1LP4-RS  
20 cm cable for 5.5 x 2.5 DC Plug with screw

## Dimensions (Unit: mm)

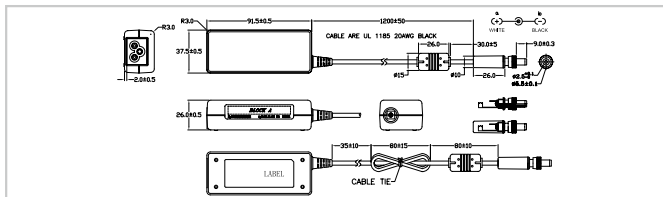

## Ordering Information

Part No.	Description
63000-FSP036RAB610-RS	12V 36W Power adapter with lock screw, 90~264VAC input, ErP
63000-FSP036RAB608-RS	12V 36W Power adapter without lock, 90~264VAC input, ErP

# FSP040DGAA1

40W AC/DC Adapter



Plug Type: øin 2.5 mm / øout 5.5 mm

**\*\*Meet ErP**



## Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 3.3 A
- Output Watts: 40 W
- Efficiency: 82%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 60°C

## Optional Cable



PN: CB-P1LP4-RS  
20 cm cable for 5.5 x 2.5 DC Plug with screw

## Dimensions (Unit: mm)

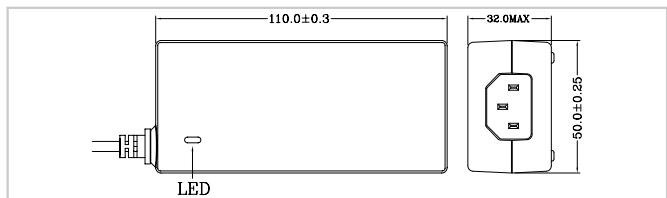


## Ordering Information

Part No.	Description
63000-FSP040DGAA1107-RS	12V 40W power adapter with Φ2.5/Φ5.5/lock 90~264 VAC input, ErP

# FSP025DGAA1

25W AC/DC Adapter

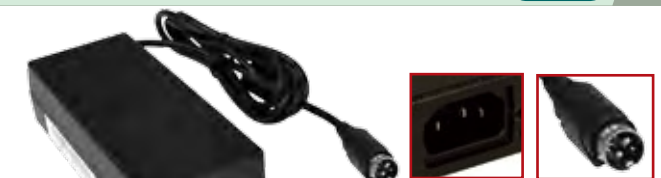

Plug Type: Power mini-DIN (4P)


**\*\*Meet ErP**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 5 V
- Output Current: 5 A
- Output Watts: 25 W
- Efficiency: 70%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 60°C

## Dimensions (Unit: mm)

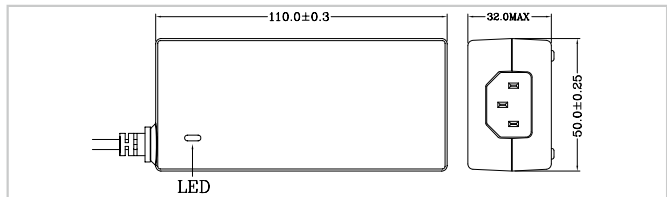

## Ordering Information

Part No.	Description
63000-FSP025DGAA1702-RS	5V 25W power adapter with Din 3-pin/lock 90~264 VAC input, ErP

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Embedded Computing Solutions

4 Automation Control

5 ORing Network Communication

6 Power Supply/ Peripherals

7 Panel Solutions Introduction