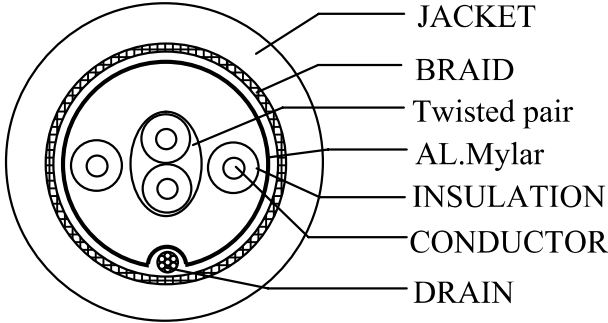



SPECIFICATION:		1P*28AWG+2C*24AWG+AL.Mylar+Drain+Braid		USB2.0	CONSTRUCTION D. W. G.											
ITEM		SPECIFICATION														
CONDUCTOR	AWG	28AWG	24AWG						COLOUR CODE: 1P: 1.GREEN * WHITE 2C: 1.RED 2.BLACK							
	MATERIAL	TINNED COPPER	TINNED COPPER													
	COND.SIZE	7/0.127±0.008mm	7/0.20±0.008mm													
INSULATION	MIN.AVG.THICK	0.23mm	0.23mm													
	MATERIAL	HD-PE	SR-PVC													
	O D	0.90±0.05mm	1.10±0.05mm													
	NO.	1P	2C													
Face Outside AL.MYLAR	COVERAGE	100%											MARKING USB SHIELDED HIGH SPEED CABLE 2.0 REVISION 28AWG/1P+24AWG/2C E119932-I 兎 AWM 2725 80°C 30V COPARTNER			
	OVERLAP	25%MIN														
DRAIN	AWG	28AWG														
	MATERIAL	TINNED COPPER														
	SIZE	7/0.127±0.008mm×1PC														
BRAID COPPER	MATERIAL	TINNED COPPER														
	SIZE	16*5/0.10±0.008mm														
JACKET	MIN.AVG.THICK	0.23mm														
	MATERIAL	HALF MATT PVC														
	COLOUR	BEIGE														
	OD	4.50±0.15mm														
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES OF JACKET			REMARK											
1.Rating :TEMP 80°C Voltage 30V 2.Conductor Resistance : at 20°C (MAX) 28AWG <239Ω/KM 24AWG <94.2Ω/KM		1. Flexibility test: NO CRACKING 2. Flame test: PASS VW-1			REV.2:CHANGE MARKING  UNITED ELECTRIC WIRE (KUNSHAN) CO., LTD. PART NO. 40425A0002											
					APPROVED		CUSTOMER	福保								
					CHECKED		REV.	2								
					DRAWING	LCL	DATE	2010-4-23								

F-GC-03-02a