

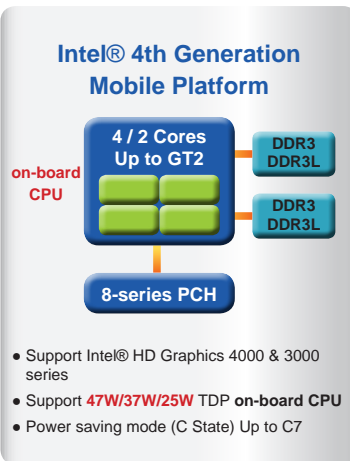
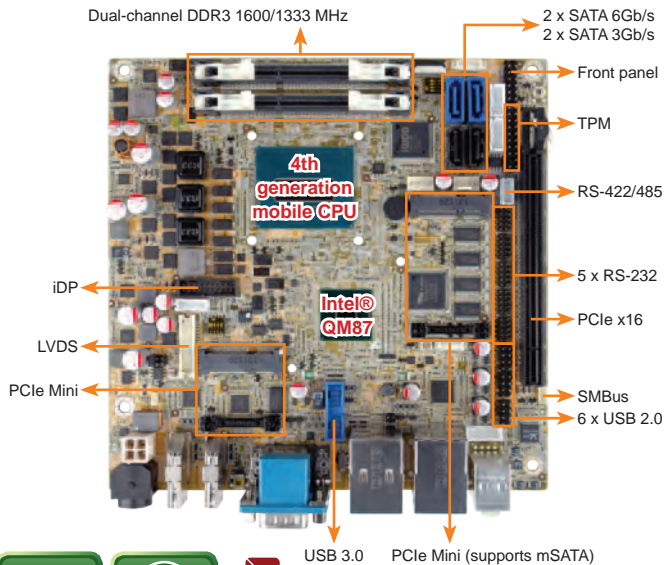


KINO-DQM871

Mini-ITX SBC supports Intel® 22nm 4th generation mobile Core™ i7/i5/i3 and Celeron® on-board processors, HDMI/VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio

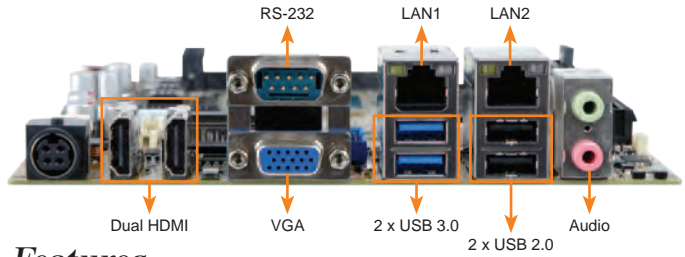

Dual PCIe Mini slot support

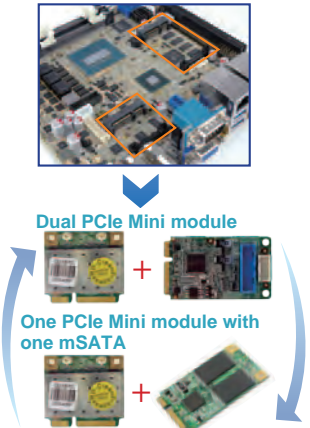

Specifications

- CPU**
 - Intel® mobile Core™ i7-4700EQ on-board processor with Intel® AMT 9.0 support (2.4GHz, quad-core, 6MB cache, TDP=47W)
 - Intel® mobile Core™ i5-4402E on-board processor with Intel® AMT 9.0 support (1.6GHz, dual-core, 3MB cache, TDP=25W)
 - Intel® mobile Core™ i3-4102E on-board processor (1.6GHz, dual-core, 3MB cache, TDP=25W)
 - Intel® mobile Celeron® 2002E on-board processor (1.5GHz, dual-core, 2MB cache, TDP=25W)
 - Intel® mobile Core™ i5-4400E on-board processor with Intel® AMT 9.0 support (2.7GHz, dual-core, 3MB cache, TDP=37W) (by request)
 - Intel® mobile Core™ i3-4100E on-board processor (2.4GHz, dual-core, 3MB cache, TDP=37W) (by request)
 - Intel® mobile Celeron® 2000E on-board processor (2.2GHz, dual-core, 2MB cache, TDP=37W) (by request)
- System Chipset:** Intel® QM87
- Memory:** Two 204-pin 1066/1333/1600 MHz DDR3 dual-channel SO-DIMMs (support up to 16GB)
- BIOS:** UEFI BIOS
- Ethernet**
 - LAN1: Intel® I217LM with Intel® AMT 9.0 support
 - LAN2: Intel® I211-AT PCIe controller
- Graphics Engine**
 - Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2
 - Full MPEG2, VC1, AVC Decode
- Display Output**
 - VGA (up to 1920x1200@60Hz)
 - 18/24-bit dual-channel LVDS by CH7511B DP to LVDS converter (up to 1920x1200@60Hz)
 - Dual HDMI (up to 2500x1600@60Hz)
 - iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160 @60 Hz)
- Super I/O:** Fintek F81866
- Audio:** Realtek ALC662 HD Audio codec
- I/O Interface**
 - 5 x RS-232
 - 1 x RS-422/485
 - 1 x 6-pin header for KB/MS
 - 2 x SATA 3Gb/s, 2 x SATA 6Gb/s (RAID 0, 1, 5, 10 supported)
- Front Panel:** 1 x Front panel (Power LED, HDD LED, Speaker, Power Button, Reset Button)
- LAN LED:** 2 x 2-pin headers for LAN1 Link LED, LAN2 Link LED
- SMBus:** 1 x 4-pin wafer
- TPM:** 2 x 10-pin pinheader
- Expansion**
 - 1 x Full-size PCIe Mini card slot (supports mSATA, SATA 6Gb/s signal only)
 - 1 x Half-size PCIe Mini card slot
 - 1 x PCIe x16 (Gen.3)
- Watchdog Timer:** Software programmable, support 1~255 sec. system reset
- Digital I/O:** 8-bit digital I/O (4-bit input, 4-bit output)
- Fan Connector**
 - 1 x 4-pin CPU fan connector
 - 1 x 4-pin system fan connector
- Power Supply**
 - 12V DC input
 - 1 x External DC jack (4-pin DIN)
 - 1 x Internal 4-pin (2x2) power connector
 - Support AT/ATX mode
- Power Consumption**
 - 12V@6.03A (Intel® Core™ i7-4770EQ, 2.4GHz CPU with 8GB (2x4GB) 1333MHz DDR3 memory)
 - Operating Temperature: -20°C ~ 60°C
 - Storage Temperature: -30°C ~ 70°C
 - Operating Humidity: 5% ~ 95%, non-condensing
 - Dimensions: 170mm x 170mm
 - Weight: GW: 900g/NW: 450g

Features

- 4th generation Intel® mobile Core™ i7/i5/i3 or Celeron® on-board processor
- DDR3 1066/1333/1600MHz dual-channel SDRAM
- HDMI 1.4a compliant, triple independent display supported
- 3D micro-architecture enhancements support DX11.1, OCL 1.2 and OGL3.2
- Rich media acceleration for hardware decode and encode acceleration
- Intel® GbE LAN with Intel® AMT 9.0 support
- High speed I/O interface for PCIe Gen 3.0 add-on card, USB 3.0 and SATA 6Gb/s supported
- Supports dual PCIe Mini expansion for PCIe Mini device and mSATA
- IEI Jumper-less function

Packing List

| | |
|---|----------------|
| 1 x KINO-DQM871 motherboard | |
| 2 x SATA with power output cable (P/N: 32801-000100-300-RS) | 1 x CPU cooler |
| 1 x I/O shielding | 1 x Utility CD |
| 1 x Mini jumper pack | 1 x QIG |

Ordering Information

| Part No. | Description |
|----------------------|--|
| KINO-DQM871-i7-R10 | Mini-ITX SBC supports Intel® 22nm Mobile Core™ i7-4700EQ on-board Processor, HDMI / VGA / LVDS / DP, Dual Intel® PCIe GbE, AMT 9.0, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| KINO-DQM871-i5-E-R10 | Mini-ITX SBC supports Intel® 22nm Mobile Core™ i5-4402E on-board Processor, HDMI / VGA / LVDS / DP, Dual Intel® PCIe GbE, AMT 9.0, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| KINO-DQM871-i3-E-R10 | Mini-ITX SBC supports Intel® 22nm Mobile Core™ i3-4102E on-board Processor, HDMI / VGA / LVDS / DP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| KINO-DQM871-CE-R10 | Mini-ITX SBC supports Intel® 22nm Celeron 2002E on-board Processor, HDMI / VGA / LVDS / DP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| 19800-003100-300-RS | Dual USB 2.0 cable |
| 19800-010500-200-RS | USB 3.0 cable with bracket, 457mm |
| 19800-000300-100-RS | RS-232 cable with bracket |
| 32205-003800-300-RS | RS-422/485 cable, 200mm |
| 32000-023800-RS | KB/MS Y cable |
| DP-LVDS-R10 | DisplayPort to 24-bit dual-channel LVDS converter board (for IEI iDP connector) |
| DP-HDMI-R10 | DisplayPort to HDMI converter board (for IEI iDP connector) |
| DP-DVI-R10 | DisplayPort to DVI-D converter board (for IEI iDP connector) |
| DP-VGA-R10 | DisplayPort to VGA converter board (for IEI iDP connector) |
| DP-DP-R10 | DisplayPort converter board (for IEI iDP connector) |
| TPM-IN01-R11 | 20-Pin Infineon TPM module, software management tool, firmware V3.17 |

- Industrial Computing Solutions
- Video Capture Solutions
- Embedded Computing Solutions
- Automation Control
- ORing Network Communication
- Power Supply/Peripherals
- Panel Solutions Introduction