
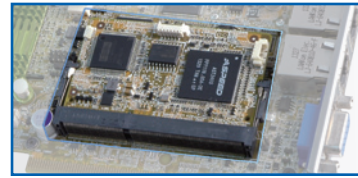


PCIE-Q870-i2

Full-size PICMG 1.3 CPU card supports LGA 1150 Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU per Intel® Q87, DDR3, VGA, iDP, Dual PCIe GbE, SATA 6Gb/s, mSATA, PCIe Mini, RS-232, Audio, iRIS-2400 and RoHS

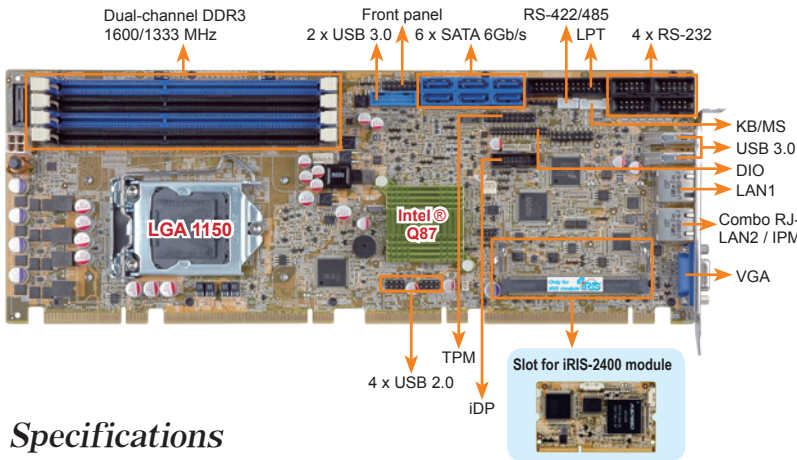

iRIS-2400 Key Features

- IPMI 2.0 Based Management
- Cross OS Platform Support
- Hardware Health Monitor
- Event Log
- KVM over IP
- Notifications
- Virtual Media Support
- Remote Power Control
- User Management
- Serial over LAN



Enhance component protection
Prevent the damage of bottom side components

Specifications

- ◆ CPU
LGA 1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- ◆ Chipset
Intel® Q87
- ◆ Memory
Four 240-pin 1600/1333 MHz dual-channel unbuffered DDR3 & DDR3L SDRAM DIMMs support up to 32 GB
- ◆ BIOS
UEFI BIOS
- ◆ Graphics Engine
Intel® HD Graphics Gen 7.5 supports DX11.1, OpenCL 1.2 and OpenGL 3.2 Full MPEG2, VC1, AVC Decode
- ◆ Display Output
1 x VGA (up to 1920x1200@60 Hz)
1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
- ◆ Ethernet
LAN1: Intel® I217LM with Intel® AMT 9.0 support
LAN2: Intel® I210-AT PCIe controller with NCSI support
- ◆ External I/O Interface
2 x USB 3.0
- ◆ Internal I/O Interface
1 x KB/MS (1x6 pin) 4 x RS-232 (2x5pin, P=2.54)
1 x LPT (2x13 pin) 4 x USB 2.0 (2x4 pin, P=2.54)
1 x mSATA 4 x USB 2.0 (Golden finger)
1 x RS-422/485 (1x4 pin, P=2.0) 6 x SATA 6Gb/s (RAID 0/1/5/10 supported)
2 x USB 3.0 (2x10 pin)
- ◆ Front Panel
1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED
2 x LAN LED (1x2 pin)
- ◆ Audio
Supports 7.1-channel HD Audio by IECI AC-KIT-892HD-R10 kit
- ◆ TPM
1 x TPM (2x10 pin)
- ◆ SMBus
1 x SMBus (1x4 pin)
- ◆ iPC
1 x iPC (1x4 pin)
- ◆ Infrared Interface
1 x Infrared Interface (1x5 pin)
- ◆ iRIS Remote Management Module
1 x iRIS-2400 slot
- ◆ Expansion
PCIe signal and PCI signal via golden finger
1 x Full-size PCIe Mini card slot (colay mSATA)
- ◆ Watchdog Timer
Software programmable, supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
1 x CPU smart fan (1x4 pin)
1 x System smart fan (1x3 pin)
- ◆ Power Supply
5V/12V, AT/ATX support
- ◆ Power Consumption
5V@3.55A, 12V@0.37A, Vcore_12V@7.61A, 3.3V@1.55A, 5VSB@0.13A (Intel® Core™ i7-4770K 3.90 GHz CPU with 16 GB (4x4 GB) 1333 MHz DDR3 memory)
- ◆ Operating Temperature
-20°C ~ 60°C
- ◆ Storage Temperature
-30°C ~ 70°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions
338 mm x 126 mm
- ◆ Weight
GW: 1200g / NW: 420g



Features

- PICMG 1.3 full-size graphic grade solution
- LGA 1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Four 240-pin 1600/1333 MHz dual-channel DDR3 DIMMs support up to 32 GB memory
- Supports dual independent display by VGA & iDP interfaces
- Supports PCIe Mini devices and mSATA via PCIe Mini socket
- Intel® PCIe GbE with Intel® AMT 9.0 support
- Supports RAID function via SATA 6Gb/s
- TPM v1.2 hardware security function supported by TPM module
- Stiffener bars
- IEI jumper-less function
- Supports IPMI 2.0 via iRIS-2400 module

Packing List

1 x PCIE-Q870-i2 single board computer	
1 x Dual RS-232 cable	
1 x USB 2.0 cable	1 x QIG
2 x SATA cable	1 x Utility CD

Ordering Information

Part No.	Description
PCIE-Q870-i2-R10	Full-size PICMG 1.3 CPU card supports LGA 1150 Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU with Intel® Q87, DDR3, VGA, iDP, dual Intel® PCIe GbE, SATA 6Gb/s, mSATA, RS-232, PCIe Mini, Audio, iRIS-2400 and RoHS
iRIS-2400-R10	IPMI 2.0 adapter card with AST2400 BMC chip for DDR3 SO-DIMM socket interface
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
19800-010500-200-RS	USB 3.0 cable with bracket, 450mm
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0
AC-KIT-892HD-R10	7.1-channel HD Audio kit with Realtek ALC892 supports dual audio streams
CF-1150SB-R11	Special cooler kit for LGA 1150, high-performance compatible, 65W
CF-1150SC-R20	Special cooler kit for LGA 115X, 1U chassis compatible, 65W, copper
CF-1150SE-R11	Special cooler kit for LGA 115X, high-performance compatible, 95W, copper
CF-1150SF-R10	Special cooler kit for LGA 115X Intel® CPU, 107x70x35, 54W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Industrial Computer Chassis

4 Open Frame Monitor

5 Power Supply/Peripherals

6 All-in-One System