



IEI Technology Corp.



MODEL:

UPC-V315-QM77

Panel PC with Touch Screen and Intel® Core™ i3-3217UE/  
i7-3517UE Processor, GbE, Wireless, GPS, RFID, Bluetooth,  
USB, Audio, RS-232/422/485, RoHS Compliant, IP 65 Protection

## User Manual

Rev. 1.00 – 3 May, 2013



# Revision

---

Date	Version	Changes
3 May, 2013	1.00	Initial release

# Copyright

---

## COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

## TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

# Table of Contents

<b>1 INTRODUCTION.....</b>	<b>1</b>
1.1 OVERVIEW.....	2
1.2 MODEL VARIATIONS .....	3
1.3 FEATURES.....	3
1.4 EXTERNAL OVERVIEW.....	4
1.4.1 <i>Front Panel</i> .....	4
1.4.1.1 LED Indicators.....	5
1.4.2 <i>Bottom Panel</i> .....	7
1.4.3 <i>Side Panels</i> .....	8
1.4.4 <i>Rear Panel</i> .....	9
1.4.5 <i>Frame (Function Keys)</i> .....	9
1.5 DIMENSIONS.....	11
1.6 SPECIFICATIONS .....	12
<b>2 UNPACKING .....</b>	<b>15</b>
2.1 UNPACKING.....	16
2.2 PACKING LIST.....	17
<b>3 INSTALLATION .....</b>	<b>19</b>
3.1 ANTI-STATIC PRECAUTIONS .....	20
3.2 INSTALLATION PRECAUTIONS .....	20
3.3 PREINSTALLED COMPONENTS.....	21
3.4 SSD INSTALLATION .....	21
3.5 INTERNAL USB DEVICES INSTALLATION .....	23
3.6 MOUNTING THE SYSTEM .....	25
3.6.1 <i>Arm Mounting</i> .....	26
3.6.2 <i>Stand Mounting</i> .....	27
3.6.3 <i>Wall Mounting</i> .....	28
3.7 BOTTOM PANEL CONNECTORS.....	30
3.7.1 <i>External Peripheral Device Connection</i> .....	30
3.7.2 <i>ACC Mode Selection</i> .....	32

## UPC-V315-QM77 Panel PC

3.7.3 AT/ATX Power Mode Selection.....	32
3.7.4 Audio Connectors.....	33
3.7.5 CAN-bus Terminal Block.....	33
3.7.6 HDMI Connector .....	33
3.7.7 LAN Connector .....	35
3.7.8 Power Input, 3-pin Terminal Block.....	36
3.7.9 Power Input, 4-pin DIN Connector .....	36
3.7.10 RJ-45 RS-232 Serial Port.....	37
3.7.11 RJ-45 RS-422/485 Serial Port.....	38
3.7.12 USB Connectors.....	40
3.7.13 VGA Connector .....	42
3.8 REDUNDANT POWER .....	44
3.8.1 ACC ON .....	45
3.8.1.1 Boot-up .....	45
3.8.1.2 Switch to Backup Power.....	46
3.8.1.3 Shutdown .....	46
3.8.2 ACC OFF .....	47
3.8.2.1 Boot-up .....	47
3.8.2.2 Switch to Backup Power.....	48
3.8.2.3 Shutdown .....	49
3.9 REMOTE CONTROL.....	50
<b>4 BIOS.....</b>	<b>51</b>
4.1 INTRODUCTION.....	52
4.1.1 Starting Setup.....	52
4.1.2 Using Setup .....	52
4.1.3 Getting Help.....	53
4.1.4 Unable to Reboot after Configuration Changes .....	53
4.1.5 BIOS Menu Bar.....	53
4.2 MAIN.....	54
4.3 ADVANCED.....	55
4.3.1 ACPI Settings.....	56
4.3.2 RTC Wake Settings .....	57
4.3.3 CPU Configuration.....	58
4.3.4 SATA Configuration .....	60

4.3.5 Intel(R) Rapid Start Technology .....	60
4.3.6 USB Configuration.....	61
4.3.7 F81866 Super IO Configuration .....	62
4.3.7.1 Serial Port n Configuration .....	63
4.3.8 H/W Monitor .....	66
4.3.9 Serial Port Console Redirection .....	67
4.3.10 iEi Feature .....	69
4.4 CHIPSET .....	71
4.4.1 PCH-IO Configuration .....	72
4.4.1.1 PCH Azalia Configuration .....	74
4.4.2 System Agent (SA) Configuration .....	75
4.4.2.1 Graphics Configuration.....	75
4.4.2.2 NB PCIe Configuration.....	78
4.4.2.3 Memory Configuration .....	79
4.5 BOOT.....	80
4.6 SECURITY.....	82
4.7 SAVE & EXIT .....	83
<b>A BIOS MENU OPTIONS .....</b>	<b>85</b>
<b>B ONE KEY RECOVERY .....</b>	<b>88</b>
B.1 ONE KEY RECOVERY INTRODUCTION .....	89
B.1.1 System Requirement.....	90
B.1.2 Supported Operating System .....	91
B.2 SETUP PROCEDURE FOR WINDOWS .....	92
B.2.1 Hardware and BIOS Setup .....	93
B.2.2 Create Partitions .....	93
B.2.3 Install Operating System, Drivers and Applications.....	97
B.2.4 Building the Recovery Partition .....	98
B.2.5 Create Factory Default Image.....	100
B.3 AUTO RECOVERY SETUP PROCEDURE.....	105
B.4 SETUP PROCEDURE FOR LINUX .....	109
B.5 RECOVERY TOOL FUNCTIONS .....	113
B.5.1 Factory Restore .....	114
B.5.2 Backup System.....	115
B.5.3 Restore Your Last Backup.....	116

## UPC-V315-QM77 Panel PC

<i>B.5.4 Manual</i> .....	117
<b>B.6 RESTORE SYSTEMS FROM A LINUX SERVER THROUGH LAN</b> .....	<b>118</b>
<i>B.6.1 Configure DHCP Server Settings</i> .....	119
<i>B.6.2 Configure TFTP Settings</i> .....	120
<i>B.6.3 Configure One Key Recovery Server Settings</i> .....	121
<i>B.6.4 Start the DHCP, TFTP and HTTP</i> .....	122
<i>B.6.5 Create Shared Directory</i> .....	122
<i>B.6.6 Setup a Client System for Auto Recovery</i> .....	123
<b>B.7 OTHER INFORMATION</b> .....	<b>126</b>
<i>B.7.1 Using AHCI Mode or ALi M5283 / VIA VT6421A Controller</i> .....	126
<i>B.7.2 System Memory Requirement</i> .....	128
<b>C SAFETY PRECAUTIONS</b> .....	<b>129</b>
<b>C.1 SAFETY PRECAUTIONS</b> .....	<b>130</b>
<i>C.1.1 General Safety Precautions</i> .....	130
<i>C.1.2 Anti-static Precautions</i> .....	131
<i>C.1.3 Product Disposal</i> .....	131
<b>C.2 MAINTENANCE AND CLEANING PRECAUTIONS</b> .....	<b>132</b>
<i>C.2.1 Maintenance and Cleaning</i> .....	132
<i>C.2.2 Cleaning Tools</i> .....	133
<b>D HAZARDOUS MATERIALS DISCLOSURE</b> .....	<b>134</b>
<b>D.1 HAZARDOUS MATERIAL DISCLOSURE TABLE FOR IPB PRODUCTS CERTIFIED AS     ROHS COMPLIANT UNDER 2002/95/EC WITHOUT MERCURY</b> .....	<b>135</b>

# List of Figures

---

Figure 1-1: UPC-V315-QM77 Panel PC .....	2
Figure 1-2: Front View .....	5
Figure 1-3: LED Indicators .....	5
Figure 1-4: Bottom View .....	8
Figure 1-5: Left Side View .....	8
Figure 1-6: Right Side View .....	8
Figure 1-7: Rear View .....	9
Figure 1-8: Function Key Locations .....	9
Figure 1-9: UPC-V315-QM77 Dimensions (mm).....	11
Figure 3-1: Remove the SSD Drive Bay Access Panel .....	22
Figure 3-2: Inserting the SSD .....	22
Figure 3-3: Securing the SSD .....	23
Figure 3-4: SSD Installation.....	23
Figure 3-5: Internal USB Port Cover Retention Screws.....	24
Figure 3-6: Internal USB Port Location .....	24
Figure 3-7: VESA Mount Retention Screw Holes .....	25
Figure 3-8: Mounting Brackets (Side Panels).....	26
Figure 3-9: VESA Compliant Arm.....	26
Figure 3-10: VESA Compliant Stand.....	27
Figure 3-11: Wall-mounting Bracket .....	28
Figure 3-12: Chassis Support Screws.....	29
Figure 3-13: Secure the Panel PC .....	30
Figure 3-14: I/O Cover Retention Screws .....	31
Figure 3-15: External Peripheral Device Connection.....	31
Figure 3-16: Rubber Gasket Removal.....	31
Figure 3-17: Rubber Gasket and Cable .....	32
Figure 3-18: External Peripheral Device Connection Complete .....	32
Figure 3-19: ACC Mode Switch .....	32
Figure 3-20: AT/ATX Power Mode Switch .....	33
Figure 3-21: CAN-bus Terminal Block Pinouts.....	33
Figure 3-22: HDMI Connection .....	34



## UPC-V315-QM77 Panel PC

Figure 3-23: LAN Connection .....	35
Figure 3-24: RJ-45 Ethernet Connector.....	35
Figure 3-25: 3-pin Terminal Block Pinouts .....	36
Figure 3-26: Power Input Connector.....	37
Figure 3-27: RJ-45 RS-232 Serial Port Pinout Location.....	37
Figure 3-28: DB-9 Connector Pinout Location .....	37
Figure 3-29: RJ-45 RS-232 Serial Device Connection.....	38
Figure 3-30: RJ-45 RS-422/485 Serial Port Pinout Location.....	39
Figure 3-31: DB-9 Connector Pinout Location .....	39
Figure 3-32: RJ-45 RS-422/485 Serial Device Connection.....	40
Figure 3-33: USB Device Connection .....	41
Figure 3-34: VGA Connector .....	42
Figure 3-35: VGA Connector .....	43
Figure 3-36: Power Connectors .....	44
Figure 3-37: ACC On: AT Mode.....	45
Figure 3-38: ACC On: ATX Mode.....	45
Figure 3-39: ACC On: Switch Between PWR1 and PWR2 .....	46
Figure 3-40: ACC On: Shutdown.....	47
Figure 3-41: ACC Off: AT Mode.....	48
Figure 3-42: ACC Off: ATX Mode .....	48
Figure 3-43: ACC Off: Switch Between PWR1 and PWR2 .....	48
Figure 3-44: ACC Off: Shutdown.....	49
Figure 3-45: Remote Control .....	50
Figure B-1: IEI One Key Recovery Tool Menu .....	89
Figure B-2: Launching the Recovery Tool .....	94
Figure B-3: Recovery Tool Setup Menu .....	94
Figure B-4: Command Prompt .....	95
Figure B-5: Partition Creation Commands.....	96
Figure B-6: Launching the Recovery Tool .....	98
Figure B-7: Manual Recovery Environment for Windows .....	98
Figure B-8: Building the Recovery Partition.....	99
Figure B-9: Press Any Key to Continue .....	99
Figure B-10: Press F3 to Boot into Recovery Mode.....	100
Figure B-11: Recovery Tool Menu .....	100
Figure B-12: About Symantec Ghost Window.....	101

Figure B-13: Symantec Ghost Path .....	101
Figure B-14: Select a Local Source Drive .....	102
Figure B-15: Select a Source Partition from Basic Drive .....	102
Figure B-16: File Name to Copy Image to .....	103
Figure B-17: Compress Image.....	103
Figure B-18: Image Creation Confirmation .....	104
Figure B-19: Image Creation Complete .....	104
Figure B-20: Image Creation Complete .....	104
Figure B-21: Press Any Key to Continue .....	105
Figure B-22: Auto Recovery Utility .....	106
Figure B-23: Launching the Recovery Tool .....	106
Figure B-24: Auto Recovery Environment for Windows .....	106
Figure B-25: Building the Auto Recovery Partition.....	107
Figure B-26: Factory Default Image Confirmation .....	107
Figure B-27: Image Creation Complete .....	108
Figure B-28: Press any key to continue .....	108
Figure B-29: Partitions for Linux.....	110
Figure B-30: Manual Recovery Environment for Linux .....	111
Figure B-31: Access menu.lst in Linux (Text Mode).....	112
Figure B-32: Recovery Tool Menu .....	112
Figure B-33: Recovery Tool Main Menu .....	113
Figure B-34: Restore Factory Default .....	114
Figure B-35: Recovery Complete Window .....	115
Figure B-36: Backup System.....	115
Figure B-37: System Backup Complete Window .....	116
Figure B-38: Restore Backup .....	116
Figure B-39: Restore System Backup Complete Window .....	117
Figure B-40: Symantec Ghost Window .....	117

# List of Tables

---

Table 1-1: LED Indicators .....	6
Table 1-2: Function Keys .....	10
Table 1-3: System Specifications.....	14
Table 3-1: HDMI Pinouts .....	34
Table 3-2: LAN Pinouts .....	36
Table 3-3: RJ-45 Ethernet Connector LEDs .....	36
Table 3-4: RJ-45 RS-232 Serial Port Pinouts .....	37
Table 3-5: DB-9 Connector Pinouts .....	38
Table 3-6: RJ-45 RS-422/485 Serial Port Pinouts .....	39
Table 3-7: DB-9 Connector Pinouts .....	39
Table 3-8: USB Port Pinouts (USB 2.0).....	41
Table 3-9: USB Port Pinouts (USB 3.0).....	42
Table 3-10: VGA Connector Pinouts.....	42
Table 4-1: BIOS Navigation Keys .....	53

Chapter

1

# Introduction

---

## 1.1 Overview



**Figure 1-1: UPC-V315-QM77 Panel PC**

The fanless UPC-V315-QM77 is Intel® Core™ i3-3217UE/i7-3517UE processor powered panel PC with a rich variety of functions and peripherals. The UPC-V315-QM77 panel PC is designed for easy and simplified integration into various vehicle applications.

An Intel® mobile QM77 express chipset ensures optimal memory, graphics, and peripheral I/O support. The system comes with 2GB of preinstalled DDR3 SDRAM ensuring smooth data throughputs with reduced bottlenecks and fast system access.

The redundant dual DC power input of the UPC-V315-QM77 increases the reliability of the system and prevents data loss and system corruption from sudden power failure.

The CAN-bus interface allows the UPC-V315-QM77 to communication with vehicles. Four serial ports, two external USB 3.0 ports and two external USB 2.0 ports ensure simplified connectivity to a variety of external peripheral devices. Wi-Fi capabilities and dual RJ-45 GbE connectors ensure smooth connection of the system to an external LAN.

## 1.2 Model Variations

The model numbers and model variations are listed below.

Model	CPU
UPC-V315-QM77-i7/R/2G-R10	Intel® Core™ i7-3517UE Processor
UPC-V315-QM77-i3/R/2G-R10	Intel® Core™ i3-3217UE Processor

## 1.3 Features

All the UPC-V315-QM77 models feature the following:

- Intel Ivy Bridge mobile chipset (QM77)
- 15" 400 nits 1024 x 768 LCD with LED backlight
- Full IP 65 compliant die-casting aluminum chassis
- PCIe mini card expansion
- Dual-DC input, 9V ~ 36V and 10.5V ~ 36V, switch automatically
- ACC power support
- Dual-band 2.4/5GHz Wi-Fi 802.11 a/b/g/n 3T3R MIMO design
- Reserved space for 3.75G / HSUPA USB dongle
- Optional GPS receiver
- Optional EM or Mifare RFID reader
- Optional Bluetooth module
- Built-in 2M pixels webcam with AF, AE and AWB capabilities
- CAN-bus interface with isolation
- F1 ~ F10 function keys with customization options

## 1.4 External Overview

The panel PC is a rectangular cubic structure that comprises of a screen, rear panel, top panel, bottom panel and two side panels (left and right). An aluminum frame surrounds the front screen. The rear panel provides screw holes for a wall-mounting bracket, and an arm mounting interface. The bottom panel provides access to external interface connectors.

### 1.4.1 Front Panel

The front side of the UPC-V315-QM77 is a flat panel TFT LCD screen surrounded by an aluminum frame. At the top of the front panel features one 2.0 megapixel webcam that supports auto-focus (AF), auto-exposure (AE) and auto white balance (AWB). The front panel also has following buttons, LED indicators and sensors:

- Buttons: F1~F10 (same as the function key on the keyboard)
- LEDs
  - Power 1 LED
  - Power 2 LED
  - AT/ATX power mode LED
  - CPU temperature alert LED
  - Wi-Fi connection LED
  - RFID LED
  - Bluetooth LED
  - 3G connection LED
  - GPS LED
  - Auto dimming LED
  - Microphone on/off LED
  - Audio mute LED
- Sensors
  - Ambient light sensor
  - Infrared remote control sensor

UPC-V315-QM77 Panel PC

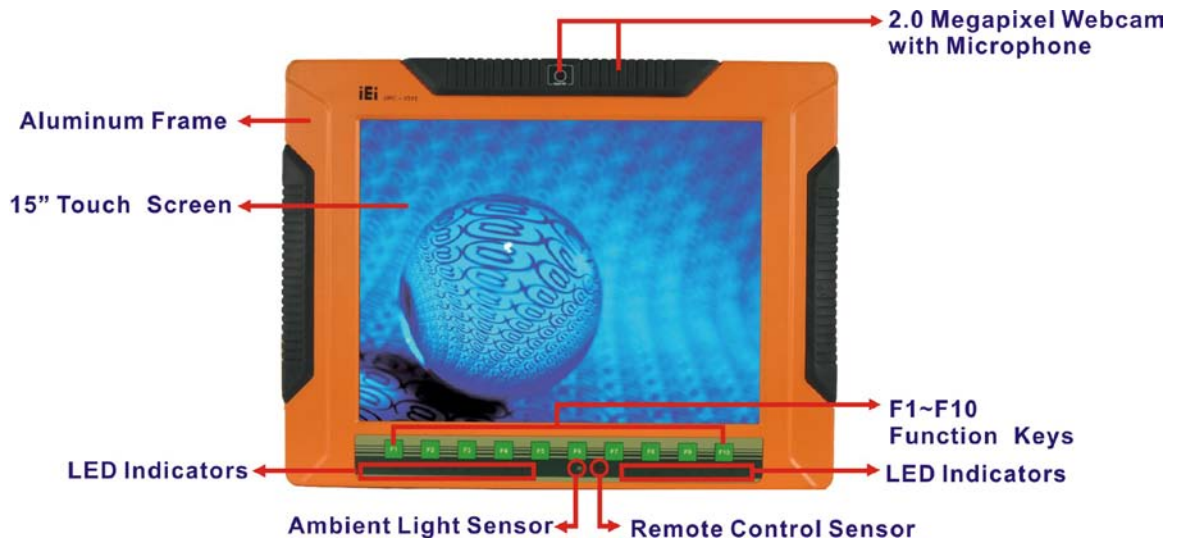


Figure 1-2: Front View

1.4.1.1 LED Indicators

The LED indicators on the front panel of the UPC-V315-QM77 are shown below.

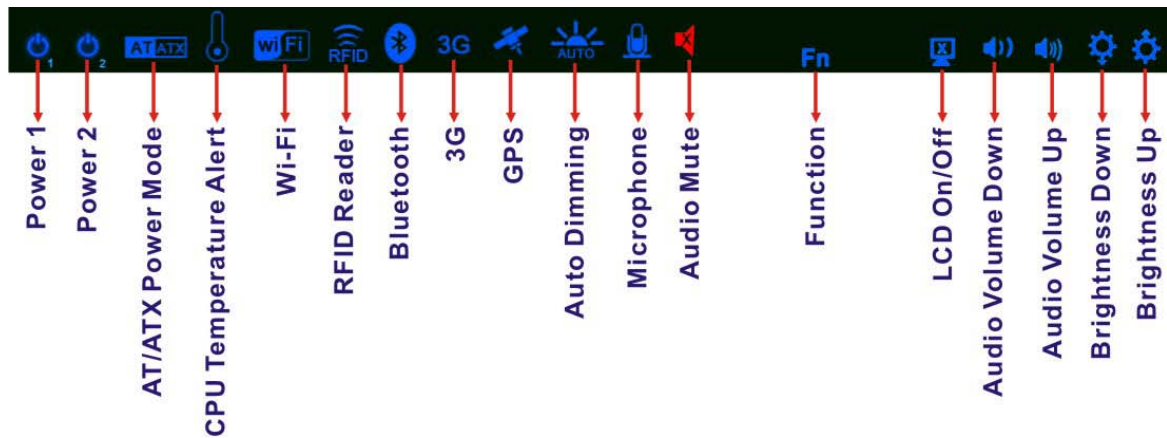


Figure 1-3: LED Indicators

The descriptions of each LED indicator are listed below.

LED Indicator	Description
<b>Power 1</b>	Pulsing Orange: Power 1 is the main power and is in standby mode Solid Orange: Power 1 is the second power and is in standby mode Solid Blue: Power 1 is providing power to the system
<b>Power 2</b>	Pulsing Orange: Power 2 is the main power and is in standby mode



	Solid Orange: Power 2 is the second power and is in standby mode Solid Blue: Power 2 is providing power to the system
<b>AT/ATX Power Mode</b>	Shows the power mode status. Controlled by the AT/ATX power mode switch.
<b>CPU Temperature Alert</b>	Blue: the CPU temperature is normal. Red: the CPU temperature is too high.
<b>Wi-Fi</b>	The Wi-Fi module is enabled or disabled. Controlled by the BIOS (see Section 4.4.1).
<b>RFID Reader</b>	The optional RFID reader is enabled or disabled. Controlled by the hot keys (see Section 1.4.5).
<b>Bluetooth</b>	The Bluetooth module is enabled or disabled. Controlled by the BIOS (see Section 4.4.1).
<b>3G</b>	The 3G module is enabled or disabled. Controlled by the BIOS (see Section 4.4.1).
<b>GPS</b>	The GPS receiver is enabled or disabled. Controlled by the BIOS (see Section 4.4.1).
<b>Auto Dimming</b>	The auto dimming function is enabled or disabled. Controlled by the BIOS (4.4.1).
<b>Microphone</b>	The microphone is enabled or disabled. Controlled by the BIOS (Section 4.4.1).
<b>Audio Mute</b>	Light on when the audio is turned off. Controlled by the hot keys (see Section 1.4.5).
<b>Function</b>	Shows the status of the function key below the LED indicator. Blinks when the corresponding button is pushed.
<b>LCD on/off</b>	
<b>Volume Down</b>	
<b>Volume Up</b>	
<b>Brightness Down</b>	
<b>Brightness Up</b>	

**Table 1-1: LED Indicators**

**CAUTION:**

If the CPU temperature alert LED shows in red, the user must lower the environment temperature or close some running applications to cool down the CPU.

### 1.4.2 Bottom Panel

The following is a list of the bottom panel peripheral device connectors on the UPC-V315-QM77.

- 1 x 9 V ~ 36 V DC power input terminal block (Power I)
- 1 x 10.5 V ~ 36 V DC power input connector (Power II)
- 2 x Audio jacks (Line out ,MIC)
- 1 x CAN bus connector
- 1 x HDMI connector
- 2 x RJ-45 GbE connectors
- 3 x RS-232 serial port connectors by RJ-45
- 1 x RS-422/485 serial port connector by RJ-45
- 2 x USB 2.0 connectors
- 2 x USB 3.0 connectors
- 1 x VGA connector

The bottom panel also includes the following switches and buttons:

- 1 x ACC on/off switch
- 1 x AT/ATX power mode switch
- 1 x Clear CMOS switch
- 1 x Reset button

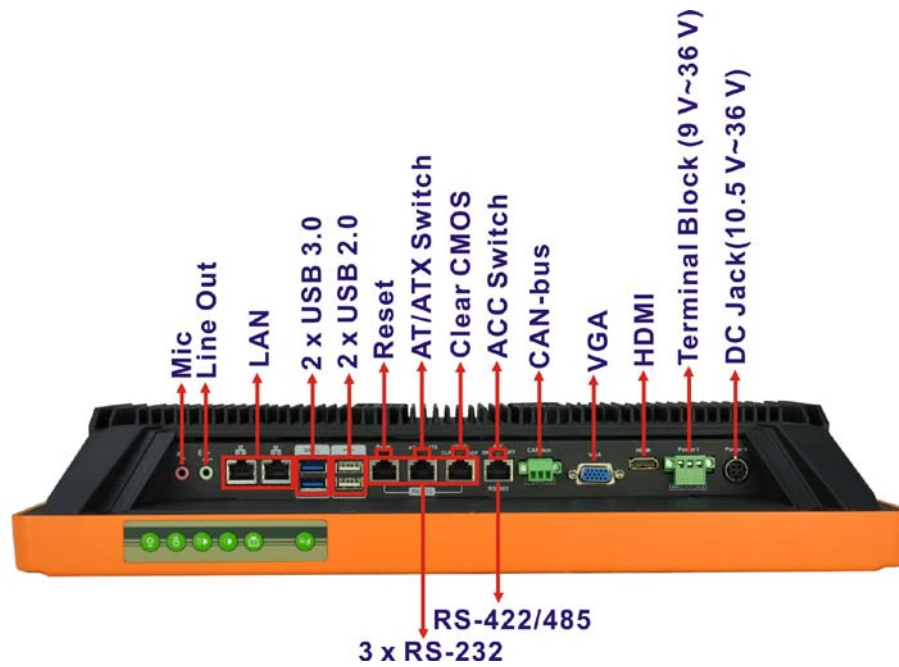


Figure 1-4: Bottom View

### 1.4.3 Side Panels

The left side panel of the panel PC provides access to the SSD drive bay. (Figure 1-5)



Figure 1-5: Left Side View

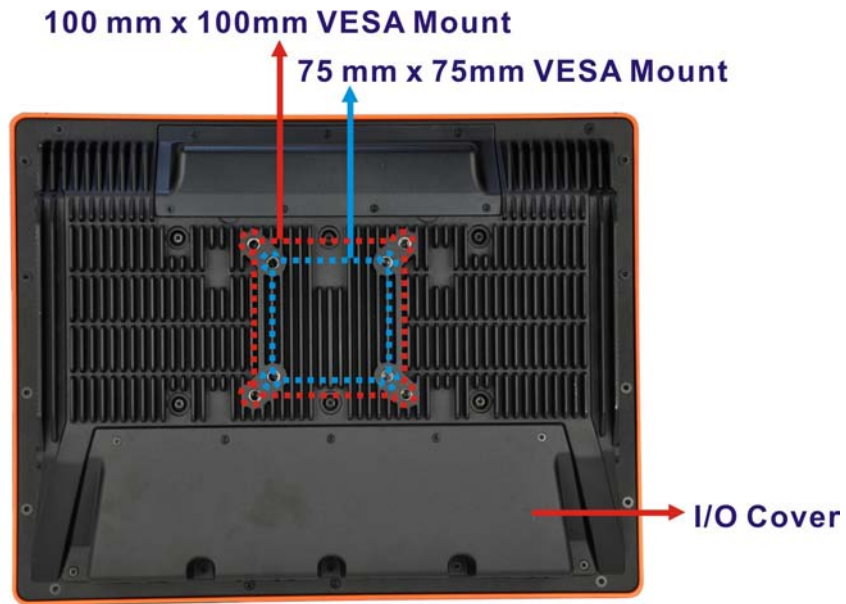


Figure 1-6: Right Side View

## UPC-V315-QM77 Panel PC

### 1.4.4 Rear Panel

The rear panel has retention screw holes that support a wall-mounting bracket.



**Figure 1-7: Rear View**

















### 1.4.5 Frame (Function Keys)

An aluminum frame surrounds the TFT LCD screen. The aluminum frame of the UPC-V315-QM77 contains several function keys that control audio volume, LCD brightness and some other system components.



**Figure 1-8: Function Key Locations**

The following table describes the function of these function keys.


Buttons	Function	Buttons	Function
	Function		
	LCD on/off	 + 	Enable/Disable RFID
	Audio volume down	 + 	Mute audio
	Audio volume up	 + 	Enable/Disable webcam
	Brightness up	 + 	Enable/Disable 3G USB 2.0 port
	Brightness down	 + 	Power on/off (Turn on: press 3 seconds Turn off: press 6 seconds)

**Table 1-2: Function Keys**

# UPC-V315-QM77 Panel PC

## 1.5 Dimensions

The dimensions of the UPC-V315-QM77 are shown in **Figure 1-9** and listed below.

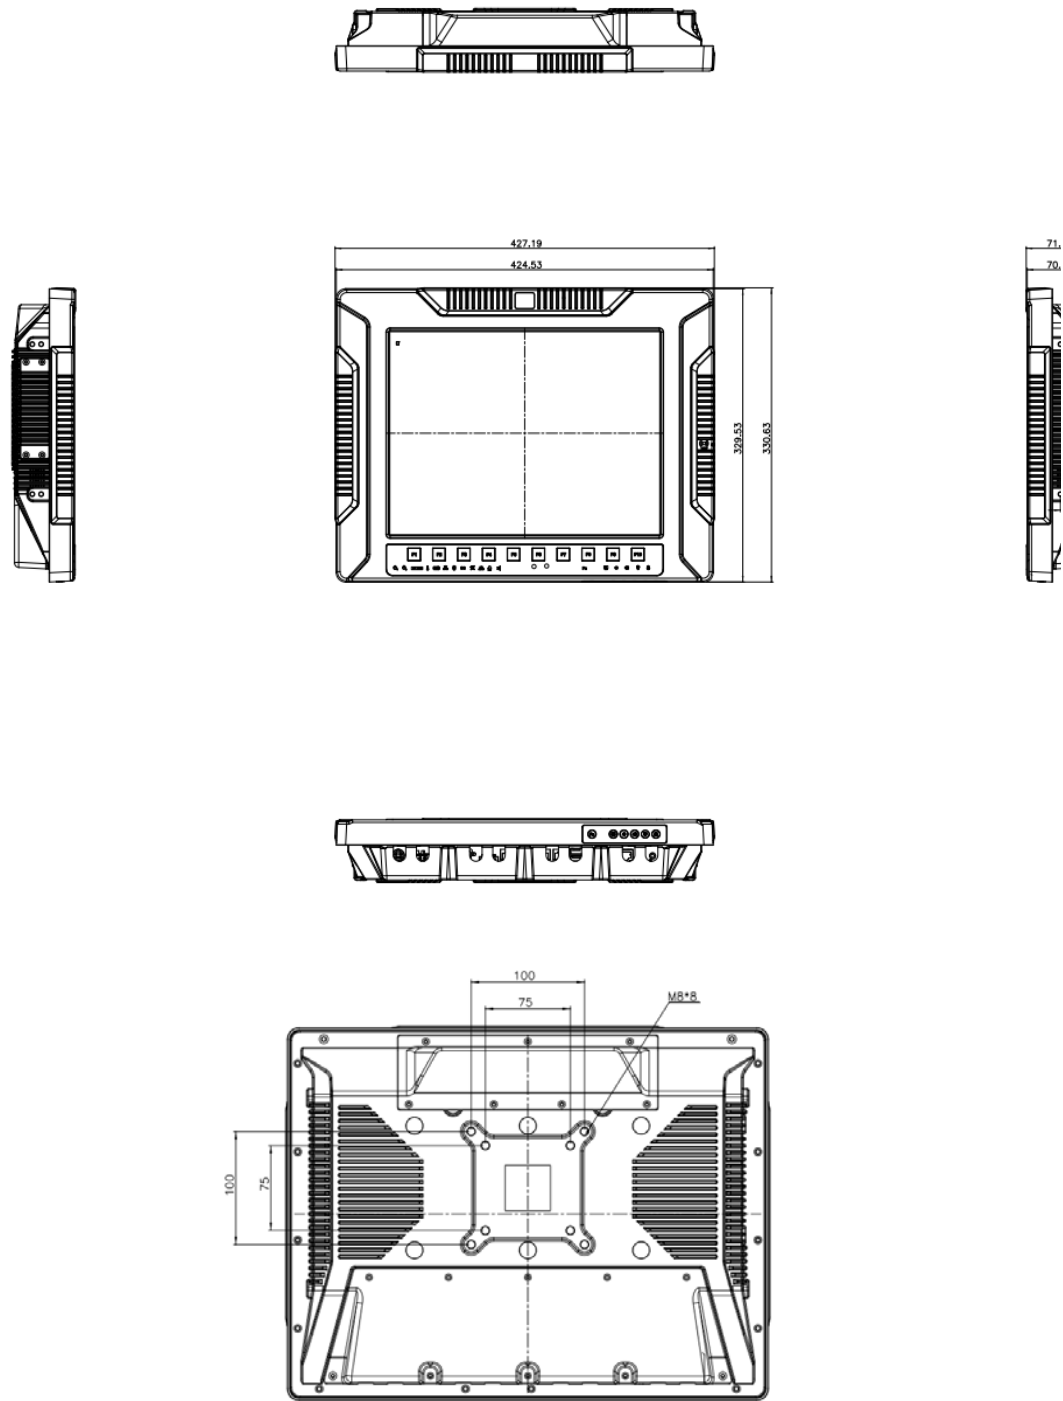

**Figure 1-9: UPC-V315-QM77 Dimensions (mm)**

## 1.6 Specifications

The technical specifications for the UPC-V315-QM77 system are listed in **Table 1-3**.

Specification	UPC-V315-QM77
<b>Display</b>	
<b>LCD Size</b>	15"
<b>Max. Resolution</b>	1024(W) x 768(H)
<b>Brightness (cd/m<sup>2</sup>)</b>	400
<b>Contrast Ratio</b>	700:1
<b>LCD Color</b>	16.2 M
<b>Pixel Pitch (mm)(HxV)</b>	0.297(H) x 0.297(V)
<b>Viewing Angle (V/H)</b>	125°/ 140°
<b>Backlight MTBF (hrs)</b>	50000
<b>Touch</b>	
<b>Touch Screen</b>	Resistive Type 5-Wire with RS-232 interface
<b>Touch Controller</b>	DMC 9000
<b>Motherboard</b>	
<b>CPU</b>	Intel® Core™ i3-3217UE Processor/ Intel® Core™ i7-3517UE Processor
<b>Chipset</b>	Mobile Intel® QM77 Express Chipset
<b>RAM</b>	Built in 1*2GB DDRIII memory (System Max. 8GB: on board Max. 4GB, socket Max. 4GB)
<b>Ethernet</b>	Intel® 82579 PHY with Intel® iAMT 8.0 supported Intel® 82583V PCIe controller
<b>Audio Codec</b>	Realtek ALC892 HD audio codec

## UPC-V315-QM77 Panel PC

<b>System</b>	
<b>Audio</b>	AMP 3W + 3W (Internal Speaker)
<b>Camera</b>	2M Mega Pixels
<b>Connectivity</b>	
<b>Wireless</b>	IEEE 802.11a/b/g/n 3T3R module (WIFI-RT5393-DB-R10)
<b>Bluetooth</b>	Bluetooth V2.0+EDR with USB interface (optional)
<b>3G</b>	Reserved USB connector (Optional)
<b>GPS</b>	FV-W9U (Optional, internal USB header)
<b>Drive Bay</b>	
<b>HDD Driver Bay</b>	1 x 2.5" SATA SSD
<b>SSD</b>	mSATA
<b>CD-ROM Driver Bay</b>	N/A
<b>Expansion Slot</b>	1 x PCIe Mini Card
<b>System Cooling</b>	Fanless
<b>Physical</b>	
<b>Construction Material</b>	Aluminium alloy
<b>Mounting</b>	VESA 100mm x100mm or 75mm x 75mm with M8 screws
<b>Front Panel Color</b>	Orange (Paintone 15C)
<b>Dimension (WxHxD) (mm)</b>	427.19 x 330.63 x 71.6
<b>Net Weight</b>	7.97KG
<b>Environment</b>	
<b>Operation Temperature</b>	-20°C ~60°C
<b>Storage Temperature</b>	-30°C ~70°C
<b>Operating Humidity</b>	5% ~90%, non-condensing



<b>Shock</b>	Half-sine wave shock 3G; 11ms; 3 shocks per axis
<b>Vibration</b>	MIL-STD-810F 514.5C-1 (with CF card or SSD)
<b>IP Rating</b>	Full IP 65
<b>Power</b>	
<b>Adapter</b>	90 W; 63040-010090-020-RS
<b>Requirement</b>	Power1:9V~36V(+/-0.3V) Power2:10.5V~36V(+/-0.3V)
<b>I/O Ports and Switches</b>	3 x RS-232 (RJ-45)
	1 x RS-422/485 (RJ-45)
	1 x CAN-BUS
	1 x VGA
	1 x HDMI port
	2 x GbE LAN
	2 x USB 2.0
	2 x USB 3.0
	1 x Reset button
	1 x Audio jack (Line out ,MIC)
	1 x DC Jack (10.5 V ~36 V DC)
	1 x Terminal block (9 V ~36 V DC)
	1 x AT / ATX mode switch
	1 x ACC on/off switch
1 x Clear CMOS switch	
1 x Reset button	

**Table 1-3: System Specifications**

Chapter

2

# Unpacking

---

## 2.1 Unpacking

To unpack the panel PC, follow the steps below:



### **WARNING!**

The front side LCD screen has a protective plastic cover stuck to the screen. Only remove the plastic cover after the panel PC has been properly installed. This ensures the screen is protected during the installation process.

---

- Step 1:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the external (second) box.
- Step 2:** Open the external (second) box.
- Step 3:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the internal (first) box.
- Step 4:** Lift the monitor out of the boxes.
- Step 5:** Remove both polystyrene ends, one from each side.
- Step 6:** Pull the plastic cover off the panel PC.
- Step 7:** Make sure all the components listed in the packing list are present.

## UPC-V315-QM77 Panel PC

### 2.2 Packing List

The UPC-V315-QM77 panel PC is shipped with the following components:

Quantity	Item	Image
1	UPC-V315-QM77 panel PC	
1	Power adapter (P/N: 63040-010065-010-RS)	
1	Power cord (P/N: 32702-000401-100-RS)	
1	Power transfer cord (P/N: 32702-000300-100-RS)	
4	RJ-45 to DB-9 COM port cable (P/N: 32005-000200-200-RS)	
1	Remote control (P/N: 7Z000-SLPCB001-RS)	
8	VESA mount screw (M8) (P/N: 44325-080081-RS)	

8	VESA mount screw (M4) (P/N: 44005-040082-RS)	
2	Mounting bracket (side panels) (P/N: 41003-0382C2-00-RS)	
1	Screw driver (P/N: 45019-001004-00)	
1	One Key Recover CD	
1	Utility CD	

If any of these items are missing or damaged, contact the distributor or sales representative immediately.

Chapter

3

# Installation

---

### 3.1 Anti-static Precautions

---



#### WARNING:

Failure to take ESD precautions during the maintenance of the EP series may result in permanent damage to the EP series and severe injury to the user.

---

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the UPC-V315-QM77. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the UPC-V315-QM77 is accessed internally, or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- **Wear an anti-static wristband:** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- **Self-grounding:** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- **Use an anti-static pad:** - When configuring the UPC-V315-QM77, place it on an anti-static pad. This reduces the possibility of ESD damaging the UPC-V315-QM77.
- **Only handle the edges of the PCB:** - When handling the PCB, hold the PCB by the edges.

### 3.2 Installation Precautions

When installing the panel PC, please follow the precautions listed below:

- **Power turned off:** When installing the panel PC, make sure the power is off. Failing to turn off the power may cause severe injury to the body and/or damage to the system.
- **Certified Engineers:** Only certified engineers should install and modify onboard functionalities.
- **Anti-static Discharge:** If a user opens the rear panel of the panel PC, to

configure the jumpers or plug in added peripheral devices, ground themselves first and wear an anti-static wristband.

### 3.3 Preinstalled Components

The following components are all preinstalled.

- Motherboard
- TFT LCD screen
- DDR3 memory module
- Resistive type touch screen
- Stereo speakers
- Wireless module
- Webcam



#### **CAUTION:**

The UPC-V315-QM77 is an IP 65 compliant panel PC. A user cannot open the rear cover and install any components inside the UPC-V315-QM77. Doing so may compromise the system's waterproof performance. To install components in the system, please contact the system vendor, reseller or an IEI sales person directly.

---

### 3.4 SSD Installation

To install the SSD into the UPC-V315-QM77, please follow the steps below:

**Step 1:** **Locate the SSD drive bay access panel.** The SSD drive bay access panel is located on the left side panel of the UPC-V315-QM77.

**Step 2:** **Remove the SSD drive bay access panel** by removing the four retention screws.






**NOTE:**



Please use the screw driver that comes with the UPC-V315-QM77 to remove the screws on the chassis.

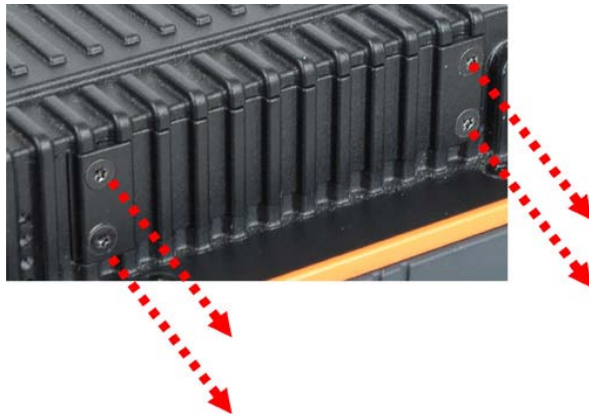


**Figure 3-1: Remove the SSD Drive Bay Access Panel**

**Step 3:** Insert the SSD into the bracket as shown.



**Figure 3-2: Inserting the SSD**

**Step 4:** Secure the SSD to the bracket using four retention screws.

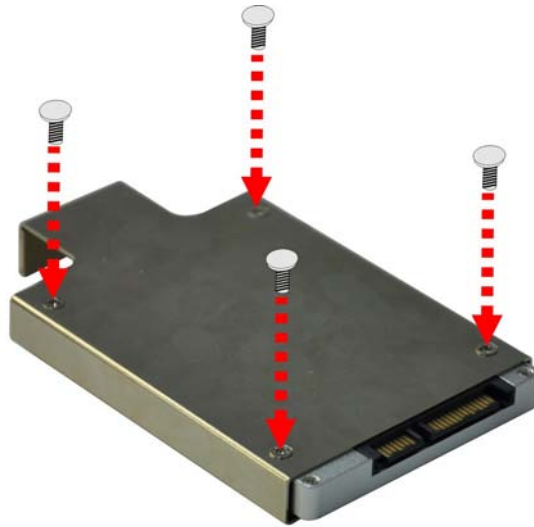

**Figure 3-3: Securing the SSD**

**Step 5:** **Install the SSD.** Correctly align the SSD bracket with the system and insert the SSD bracket into the system.



**Figure 3-4: SSD Installation**

**Step 6:** Reinstall the SSD drive bay access panel.

### 3.5 Internal USB Devices Installation

The UPC-V315-QM77 has one internal USB 2.0 port inside the chassis. This USB port is reserved for the 3G USB dongle. To install the 3G USB dongle, follow the instructions below.

**Step 1:** Remove the internal USB port cover by removing the seven retention screws.



**Figure 3-5: Internal USB Port Cover Retention Screws**

**Step 2:** Remove the internal USB port cover and locate the internal USB port.



**Figure 3-6: Internal USB Port Location**

**Step 3:** Install the USB dongle. Correctly align the USB dongle with the connector and insert the USB dongle into the connector.


**Step 4:** Reinstall the internal USB port cover.

### 3.6 Mounting the System

**WARNING:**

When mounting the panel PC onto an arm or onto the wall, it is better to have more than one person to help with the installation to make sure the panel PC does not fall down and get damaged.

The panel PC is VESA (Video Electronics Standards Association) compliant and can be mounted on an arm, a stand or a bracket with a 100 mm/75 mm interface pad. M8 and M4 mounting screws can both be used for VESA mount. The VESA mount retention screw holes of the UPC-V315-QM77 are shown in **Figure 3-7**.

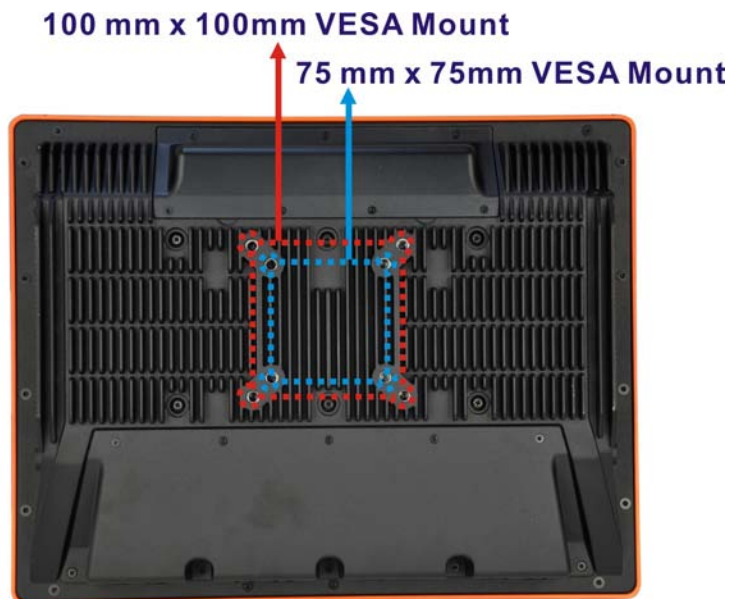

**Figure 3-7: VESA Mount Retention Screw Holes**

To enhance the stability, the user can use the mounting brackets, which are shipped with the UPC-V315-QM77 and can be attached on both side panels. An additional mounting device is required for the mounting brackets.



**Figure 3-8: Mounting Brackets (Side Panels)**



**NOTE:**

When mounting the UPC-V315-QM77 on a vehicle, it is recommended to use the **M8** mounting screws on the rear panel. A special mounting bracket is required for M8 mounting screw. Please contact IEI for more information.

The following installation options are available:

- Arm mounting
- Stand mounting
- Wall mounting

The mounting methods are described below.

### 3.6.1 Arm Mounting

The UPC-V315-QM77 can be installed on any arm that supports the standard VESA mounting interface. An example arm is shown below.



**Figure 3-9: VESA Compliant Arm**

## UPC-V315-QM77 Panel PC

To install the UPC-V315-QM77 on the arm, follow the directions below.



### NOTE:

Make sure the arm supports standard VESA mounting. The UPC-V315-QM77 uses a VESA mounting to attach to the arm.

---

- Step 1:** The arm is purchased separately. Follow the instructions in the arm's user manual to securely attach the arm to the wall.
- Step 2:** Once the mounting arm has been firmly attached to the surface, lift the panel PC onto the interface pad of the mounting arm.
- Step 3:** Align the retention screw holes on the mounting arm interface with those in the panel PC. The arm mount retention screw holes are shown in **Figure 3-7**.
- Step 4:** Secure the flat panel PC to the interface pad by inserting four retention screws through the bottom of the mounting arm interface pad and into the flat panel PC.

### 3.6.2 Stand Mounting

The UPC-V315-QM77 can be installed on any stand that supports the standard VESA mounting interface. An example stand is shown below.



**Figure 3-10: VESA Compliant Stand**

To install the UPC-V315-QM77 on the stand, follow the directions below.

**Step 1:** Locate the screw holes on the rear of the UPC-V315-QM77. This is where the stand bracket will be attached. The stand mount retention screw holes are shown in **Figure 3-7**.

**Step 2:** Align the bracket with the screw holes.

**Step 3:** Insert the retention screws into the screw holes to secure the bracket to the UPC-V315-QM77.

### 3.6.3 Wall Mounting

To mount the panel PC onto the wall, please follow the steps below.


**Step 1:** Select the location on the wall for the wall-mounting bracket.

**Step 2:** Carefully mark the locations of the four brackets screw holes on the wall.

**Step 3:** Drill four pilot holes at the marked locations on the wall for the bracket retention screws.

**Step 4:** Align the wall-mounting bracket screw holes with the pilot holes.


**Step 5:** Secure the mounting-bracket to the wall by inserting the retention screws into the four pilot holes and tightening them (Figure 3-11).

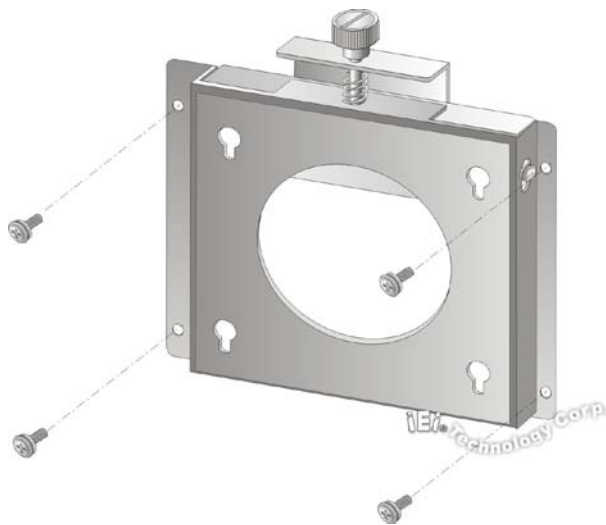

**Figure 3-11: Wall-mounting Bracket**

## UPC-V315-QM77 Panel PC

- Step 6:** Insert the four monitor mounting screws provided in the wall mounting kit into the four screw holes on the rear panel of the flat panel PC and tighten until the screw shank is secured against the rear panel (Figure 3-12).
- Step 7:** Align the mounting screws on the monitor rear panel with the mounting holes on the bracket.
- Step 8:** Carefully insert the screws through the holes and gently pull the monitor downwards until the monitor rests securely in the slotted holes (Figure 3-12). Ensure that all four of the mounting screws fit snugly into their respective slotted holes.

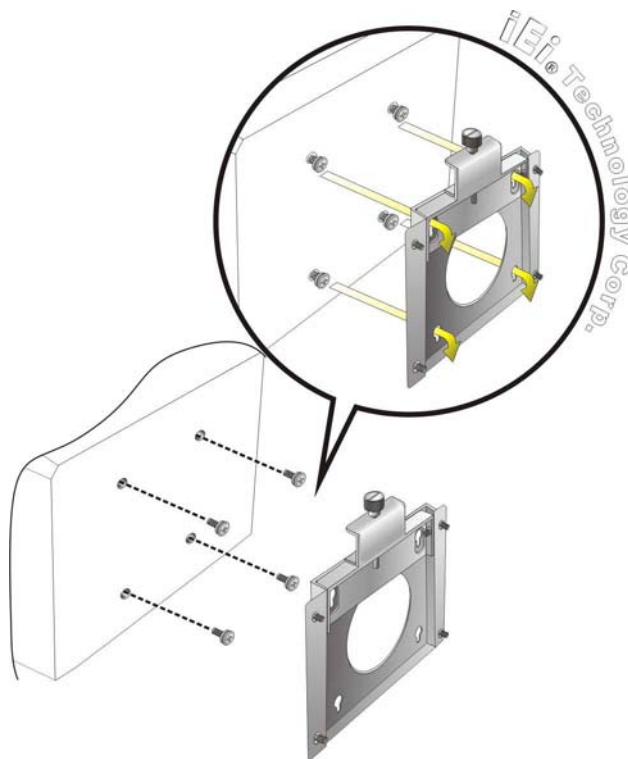

**Figure 3-12: Chassis Support Screws**




**NOTE:**

In the diagram below the bracket is already installed on the wall.



**Step 9:** Secure the panel PC by fastening the retention screw of the wall-mounting bracket. (Figure 3-13).

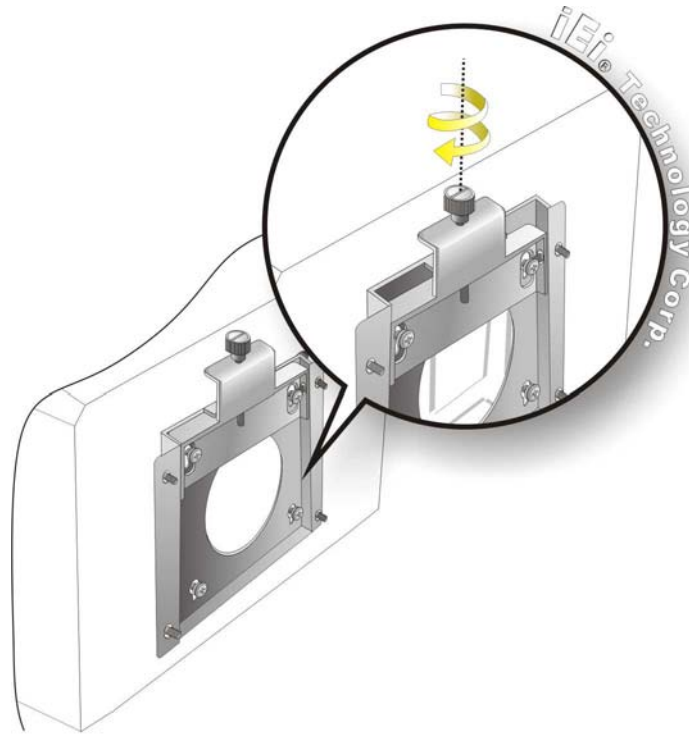

**Figure 3-13: Secure the Panel PC**

## 3.7 Bottom Panel Connectors

The bottom panel of the UPC-V315-QM77 contains I/O connectors, switches and a reset button. These connectors are protected by an I/O cover. Detailed descriptions of the connectors can be found in the subsections below.

### 3.7.1 External Peripheral Device Connection

To install external peripheral devices to the UPC-V315-QM77, please follow the steps below.

**Step 1:** Remove the I/O cover by removing the ten retention screws as shown in **Figure 3-14**.



**Figure 3-14: I/O Cover Retention Screws**

**Step 2:** Connect the cable from the external peripheral device to the corresponding connector of the UPC-V315-QM77 (**Figure 3-15**).



**Figure 3-15: External Peripheral Device Connection**

**Step 3:** Take out a rubber gasket from the I/O cover (**Figure 3-16**).



**Figure 3-16: Rubber Gasket Removal**

**Step 4:** Remove some rubber rings from the gasket to make the gasket fit perfectly to the size of the cable (**Figure 3-17**).



**Figure 3-17: Rubber Gasket and Cable**

**Step 5:** Repeat steps to other connected cables.

**Step 6:** Install the I/O cover and make sure each rubber gasket snaps into place tightly.

**Step 7:** Secure the I/O cover by the previously removed retention screws.



**Figure 3-18: External Peripheral Device Connection Complete**

### 3.7.2 ACC Mode Selection


The ACC mode can be turned on or off. The setting is made through the ACC mode switch on the bottom panel as shown below.



**Figure 3-19: ACC Mode Switch**

### 3.7.3 AT/ATX Power Mode Selection

The UPC-V315-QM77 supports both AT and ATX power modes. The setting can be made through the AT/ATX power mode switch on the bottom panel as shown below.

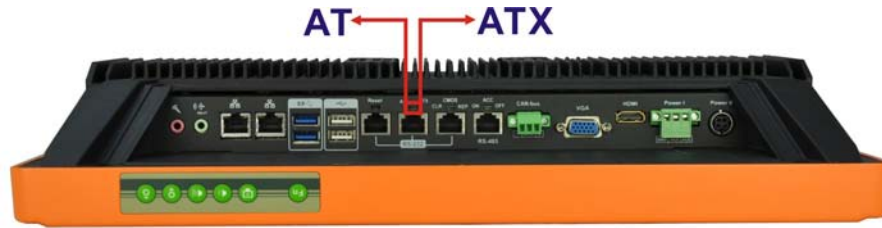

**Figure 3-20: AT/ATX Power Mode Switch**


### 3.7.4 Audio Connectors

The audio jacks connect to external audio devices.

- **Microphone (Pink):** Connects a microphone.
- **Line Out port (Green):** Connects to a headphone or a speaker. With multi-channel configurations, this port can also connect to front speakers.

### 3.7.5 CAN-bus Terminal Block

There is one 3-pin CAN-bus terminal block. The pinouts are shown in **Figure 3-21**




**Figure 3-21: CAN-bus Terminal Block Pinouts**

### 3.7.6 HDMI Connector

The HDMI connector transmits a digital signal to compatible HDMI display devices such as a TV or computer screen. To connect the HDMI cable to the UPC-V315-QM77, follow the steps below.

**Step 1:** **Locate the HDMI connector.** The location is shown in **Chapter 1**.

**Step 2:** **Align the connector.** Align the HDMI connector with the HDMI port. Make sure the orientation of the connector is correct.

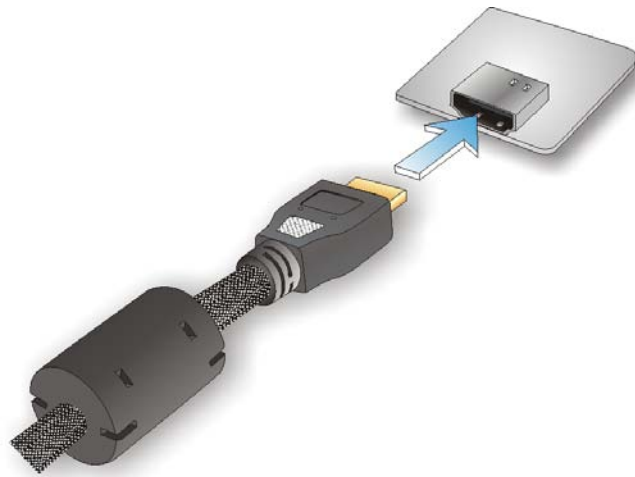
**Figure 3-22: HDMI Connection**

**Step 3: Insert the HDMI connector.** Gently insert the HDMI connector. The connector should engage with a gentle push. If the connector does not insert easily, check again that the connector is aligned correctly, and that the connector is being inserted with the right way up.

The pinouts of the HDMI connector is shown below.

Pin	Description	Pin	Description
1	HDMI_DATA2	2	GND
3	HDMI_DATA2#	4	HDMI_DATA1
5	GND	6	HDMI_DATA1#
7	HDMI_DATA2	8	GND
9	HDMI_DATA2#	10	HDMI_CLK
11	GND	12	HDMI_CLK#
13	NC	14	NC
15	HDMI_SCL	16	HDMI_SDA
17	GND	18	+5V
19	HDMI_HPD		


**Table 3-1: HDMI Pinouts**

## UPC-V315-QM77 Panel PC

## 3.7.7 LAN Connector


To connect the UPC-V315-QM77 to a network through the RJ-45 LAN connector, follow the steps below.

- Step 1:** Locate the RJ-45 connector. The location of the RJ-45 connectors is shown in **Figure 1-4**.
- Step 2:** **Align the connectors.** Align the RJ-45 connector on the LAN cable with one of the RJ-45 connectors on the UPC-V315-QM77. See **Figure 3-23**.

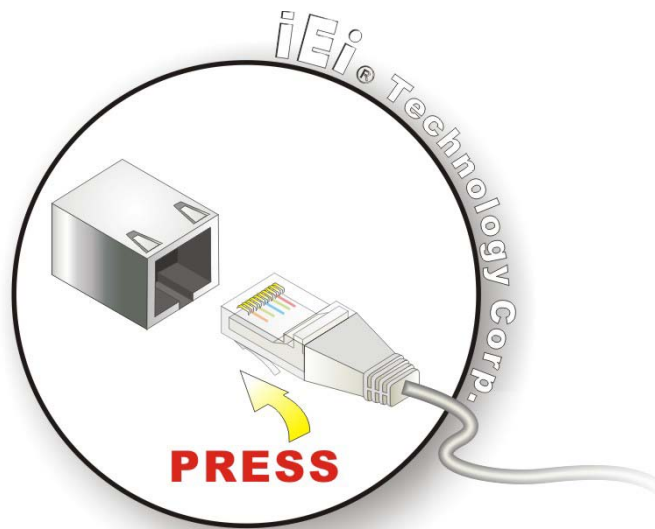

**Figure 3-23: LAN Connection**

- Step 3:** **Insert the LAN cable RJ-45 connector.** Once aligned, gently insert the LAN cable RJ-45 connector into the on-board RJ-45 connector.



**Figure 3-24: RJ-45 Ethernet Connector**

The pinouts of the RJ-45 LAN connector is shown below.

Pin	Description	Pin	Description
1	MDI0+	2	MDI0-
3	MDI1+	4	MDI1-
5	MDI2+	6	MDI2-
7	MDI3+	8	MDI3-

**Table 3-2: LAN Pinouts**


The RJ-45 Ethernet connector has two status LEDs, one green and one yellow. See **Figure 3-24**.

LED	Description	LED	Description
A	on: linked blinking: data is being sent/received	B	off: 10 Mb/s green: 100 Mb/s orange: 1000 Mb/s

**Table 3-3: RJ-45 Ethernet Connector LEDs**

### 3.7.8 Power Input, 3-pin Terminal Block


The power connector connects the leads of a 9V~36V DC power supply into the terminal block. Make sure that the power and ground wires are attached to the correct sockets of the connector.

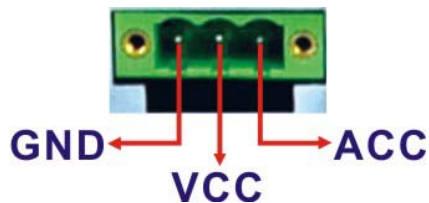

**Figure 3-25: 3-pin Terminal Block Pinouts**

### 3.7.9 Power Input, 4-pin DIN Connector


The power connector connects to the 10.5 V ~ 36 V DC power adapter.



**Figure 3-26: Power Input Connector**

### 3.7.10 RJ-45 RS-232 Serial Port


RS-232 serial port devices can be attached to the RJ-45 RS-232 serial ports on the bottom panel. The pinouts of the RJ-45 RS-232 serial port is shown below.



**Figure 3-27: RJ-45 RS-232 Serial Port Pinout Location**

Pin	Description	Pin	Description
1	RI	5	RTS
2	DTR	6	RX
3.	CTS	7	DSR
4.	TX	8	DCD

**Table 3-4: RJ-45 RS-232 Serial Port Pinouts**



**Figure 3-28: DB-9 Connector Pinout Location**

Pin	Description	Pin	Description
1	DCD	6	DSR
2	RX	7	RTS




Pin	Description	Pin	Description
3	TX	8	CTS
4	DTR	9	RI
5	GND		

**Table 3-5: DB-9 Connector Pinouts**

To install the RS-232 devices, follow the steps below.

**Step 1: Locate the RJ-45 RS-232 connector.** The location of the RJ-45 RS-232 connector is shown in **Figure 1-4**.

**Step 2: Insert the RJ-45 connector.** Insert the RJ-45 connector on the RJ-45 to DB-9 COM port cable to the RJ-45 RS-232 connector on the UPC-V315-QM77. See **Figure 3-29**.

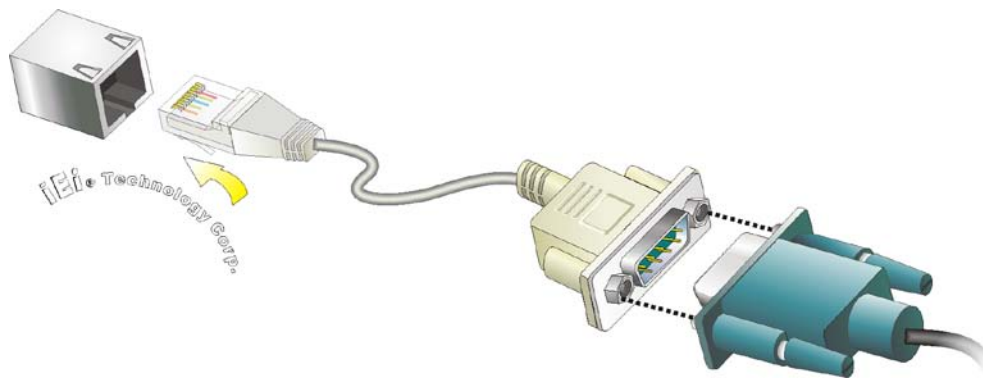

**Figure 3-29: RJ-45 RS-232 Serial Device Connection**

**Step 3: Insert the serial connector.** Insert the DB-9 connector of a serial device into the DB-9 connector on the RJ-45 to DB-9 COM port cable.

**Step 4: Secure the connector.** Secure the serial device connector to the external interface by tightening the two retention screws on either side of the connector.

### 3.7.11 RJ-45 RS-422/485 Serial Port


A RS-422/485 serial port device can be connected to the RS-422/485 serial port on the bottom panel. The pinouts of the RS-422/485 serial port is shown below.



**Figure 3-30: RJ-45 RS-422/485 Serial Port Pinout Location**

Pin	Description	Pin	Description
1	N/A	5	N/A
2	TXD485#	6	RXD485#
3.	N/A	7	N/A
4.	TXD485+	8	RXD485+

**Table 3-6: RJ-45 RS-422/485 Serial Port Pinouts**

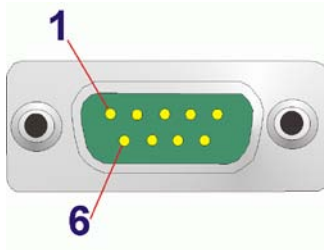


**Figure 3-31: DB-9 Connector Pinout Location**

Pin	Description (RS-422)	Description (RS-485)
1	RXD422+	N/A
2	RXD422#	N/A
3	TXD422+	TXD485+
4	TXD422#	TXD485#
5	N/A	N/A
6	N/A	N/A
7	N/A	N/A
8	N/A	N/A
9	N/A	N/A

**Table 3-7: DB-9 Connector Pinouts**

To install the RS-422/485 devices, follow the steps below.

- Step 5:** **Locate the RJ-45 RS-422/485 connector.** The location of the RJ-45 RS-422/485 connector is shown in **Figure 1-4**.
- Step 6:** **Insert the RJ-45 connector.** Insert the RJ-45 connector on the RJ-45 to DB-9 COM port cable to the RJ-45 RS-422/485 connector on the UPC-V315-QM77. See **Figure 3-29**.

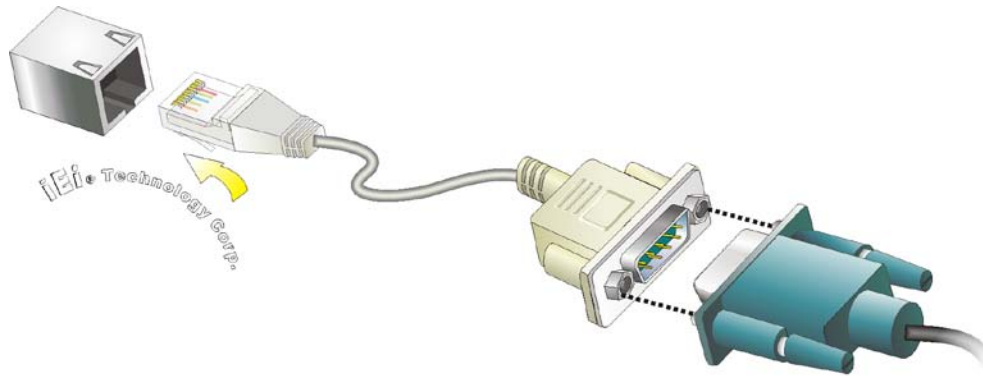


**Figure 3-32: RJ-45 RS-422/485 Serial Device Connection**

- Step 7:** **Insert the serial connector.** Insert the DB-9 connector of a serial device into the DB-9 connector on the RJ-45 to DB-9 COM port cable.
- Step 8:** **Secure the connector.** Secure the serial device connector to the external interface by tightening the two retention screws on either side of the connector.

### 3.7.12 USB Connectors

The USB ports are for attaching USB peripheral devices to the system. To install a USB device, follow the steps below.

- Step 1:** **Locate the USB connectors.** The locations of the USB connectors are shown in **Figure 1-4**.
- Step 2:** **Align the connectors.** Align the USB device connector with one of the connectors. See **Figure 3-33**.

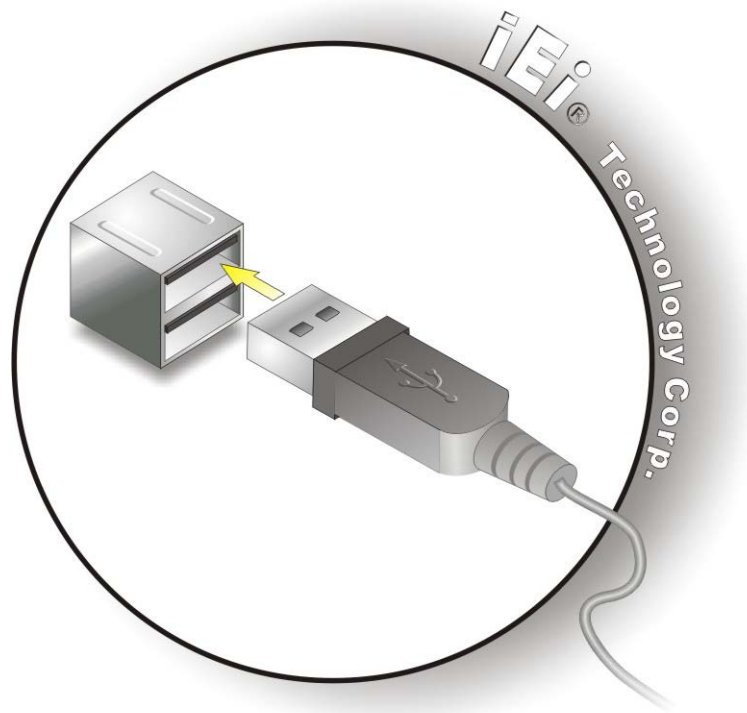

**Figure 3-33: USB Device Connection**

**Step 3: Insert the device connector.** Once aligned, gently insert the USB device connector into the on-board connector.

The pinouts of the USB ports are shown below.

Pin	Description	Pin	Description
1	+5V	5	+5V
2	USB_PN0	6	USB_PN1
3	USB_PP0	7	USB_PP1
4	GND	8	GND

**Table 3-8: USB Port Pinouts (USB 2.0)**


Pin	Description	Pin	Description
1	+5V	10	+5V
2	USB2P0_N	11	USB2P1_N
3	USB2P0_P	12	USB2P1_P
4	GND	13	GND

Pin	Description	Pin	Description
5	USB3P0_RXN	14	USB3P1_RXN
6	USB3P0_RXP	15	USB3P1_RXP
7	GND	16	GND
8	USB3P0_TXN	17	USB3P1_TXN
9	USB3P0_TXP	18	USB3P1_TXP

**Table 3-9: USB Port Pinouts (USB 3.0)**

### 3.7.13 VGA Connector

The VGA connector connects to a monitor that accepts VGA video input. The pinouts of the VGA connector is shown below.


**Figure 3-34: VGA Connector**


Pin	Description	Pin	Description
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	GND
7	GND	8	GND
9	VCC / NC	10	GND
11	NC	12	DDC DAT
13	HSYNC	14	VSYNC
15	DDCCLK		

**Table 3-10: VGA Connector Pinouts**

To connect the UPC-V315-QM77 to a monitor that accepts VGA video input, follow the steps below,

## UPC-V315-QM77 Panel PC

- Step 1: Locate the female DB-15 connector.** The location of the female DB-15 connector is shown in Figure 1-4.
- Step 2: Align the VGA connector.** Align the male DB-15 connector on the VGA screen cable with the female DB-15 connector on the external peripheral interface.
- Step 3: Insert the VGA connector** Once the connectors are properly aligned with the insert the male connector from the VGA screen into the female connector on the UPC-V315-QM77. See **Figure 3-35**.

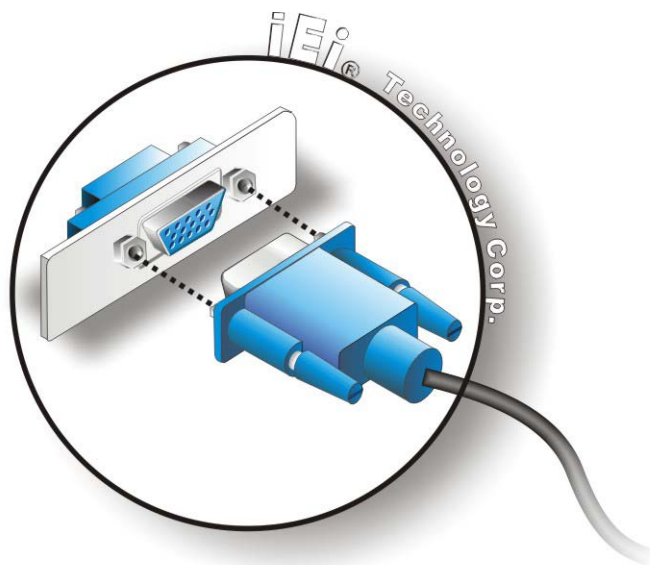

**Figure 3-35: VGA Connector**



**CAUTION:**

It is suggested that not to open the rear cover and replace any components. If the components fail, it must be shipped back to IEI to be replaced. If the system has failed, please contact the system vendor, reseller or an IEI sales person directly.

---

### 3.8 Redundant Power

The UPC-V315-QM77 is a system that supports redundant power. The redundant power input increases the reliability of the system while preventing data loss and system corruption from sudden power failure. The system can instantly and uninterruptedly switch to the second power input when the main power is unavailable or in low voltage capacity.

There are two power connectors on the bottom panel. Power 1 connector is a 3-pin terminal block that supports ACC On signal. Power 2 connector is a DIN connector that can directly connect to a power adapter. The supported power input voltages are:

- **Power 1 (Terminal block):** 9 V (+/-0.3 V) ~ 36 V
- **Power 2 (DC jack):** 10.5 V (+/-0.3 V) ~ 36 V



**Figure 3-36: Power Connectors**

When the system is in ACC On mode, the main power input is from the Power 1 connector. When the system is in ACC Off mode, the main power input is from the Power 2 connector. The ACC on/off mode is selected by the ACC on/off switch on the bottom panel.

**(Figure 3-19).**

The following sections describe how redundant power works in ACC On mode and ACC Off mode.

### 3.8.1 ACC ON



**NOTE:**

In ACC On mode, the Power 1 connector must connect to the ACC on signal to be able to control system power.

The ACC On mode is designed for vehicle applications. When the UPC-V315-QM77 is in ACC On mode, the main power input is the Power 1 connector and the backup power is from the Power 2 connector.

#### 3.8.1.1 Boot-up

When both power connectors are connected to the power source with over 9 V, the two power LEDs on the front panel remain off until **the ACC ON signal jumps from low to high**. The user can choose AT power mode or ATX power mode to control the system. The following flow diagrams show the boot-up process and the LED status in AT and ATX power modes.

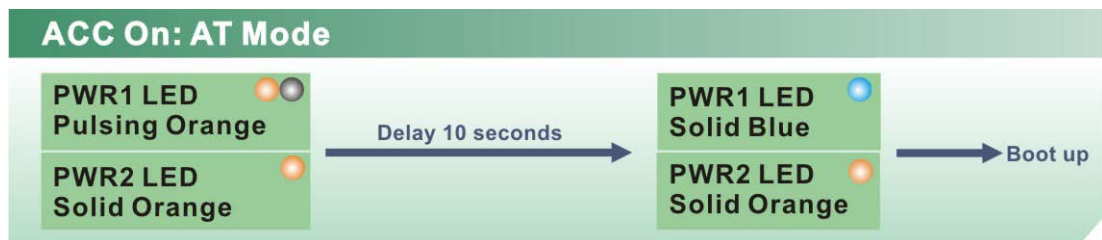


Figure 3-37: ACC On: AT Mode

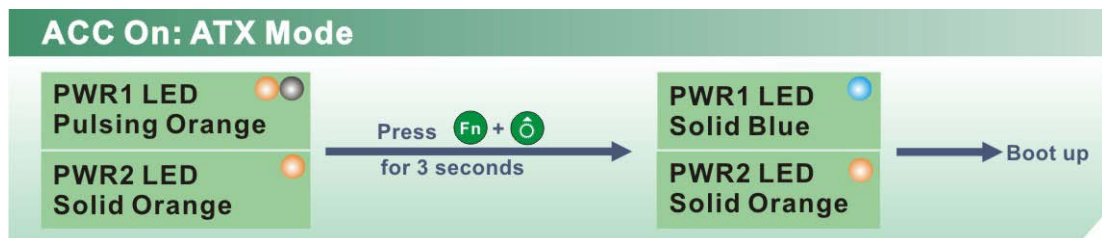


Figure 3-38: ACC On: ATX Mode




### 3.8.1.2 Switch to Backup Power

During operation, system power will switch from Power 1 to Power 2 automatically when the following situations occur:

- Power 1 < 9V and Power 2 > 10.5V
- Power 1 > 9V, but the ACC ON signal jump from high to low
- Power 1 is unplugged and Power 2 > 10.5V

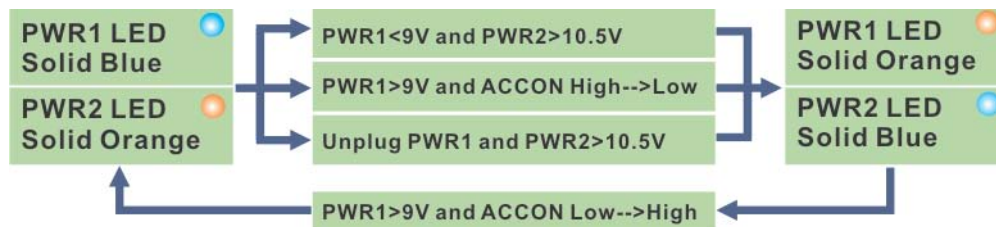

The following flow diagram shows how the power is switched between Power 1 and Power 2 and their LED statuses.



**Figure 3-39: ACC On: Switch Between PWR1 and PWR2**

### 3.8.1.3 Shutdown

The system will shutdown in the following situations:

- Power 1 < 9V and Power 2 < 10.5V
- Power 1 > 9V, Power 2 < 10.5V and ACC ON signal jump from high to low
- Press  +  buttons for 6 seconds


The following flow diagram shows the system shutdown process and the LED statuses.



Figure 3-40: ACC On: Shutdown



**NOTE:**

To turn on the system in ATX power mode, press the  button for three seconds. Press these two buttons for six seconds to turn off the system.

### 3.8.2 ACC OFF

When the UPC-V315-QM77 is in ACC Off mode, the main power input is the Power 2 connector and the backup power is from the Power 1 connector.

#### 3.8.2.1 Boot-up

When both power connectors are connected to the power source with over 9 V, the two power LEDs on the front panel turn on. The user can choose AT power mode or ATX power mode to control the system. The following flow diagrams show the boot-up process and the LED status in AT and ATX power modes.

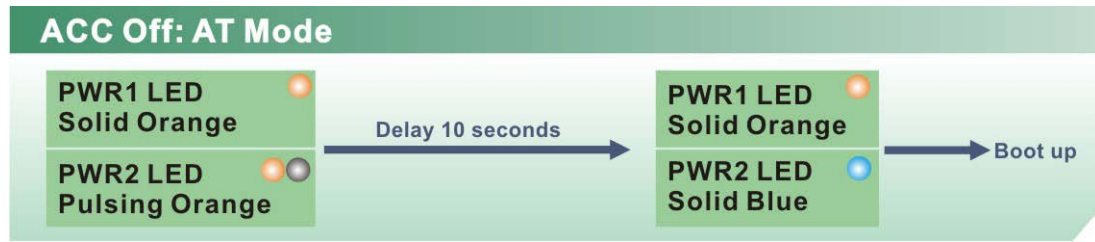


Figure 3-41: ACC Off: AT Mode

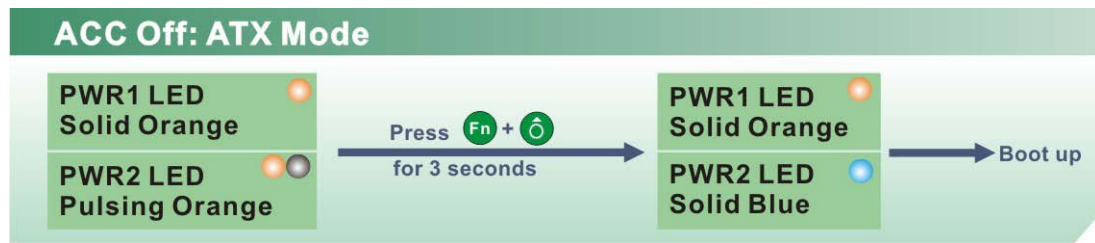


Figure 3-42: ACC Off: ATX Mode

### 3.8.2.2 Switch to Backup Power

During operation, system power switches from Power 2 to Power 1 automatically when the following situations occur:

- Power 2 < 10.5V and Power 1 > 9V
- Power 2 is unplugged and Power 1 > 9V

The following flow diagram shows how the power is switched between Power 2 and Power 1 and their LED statuses.

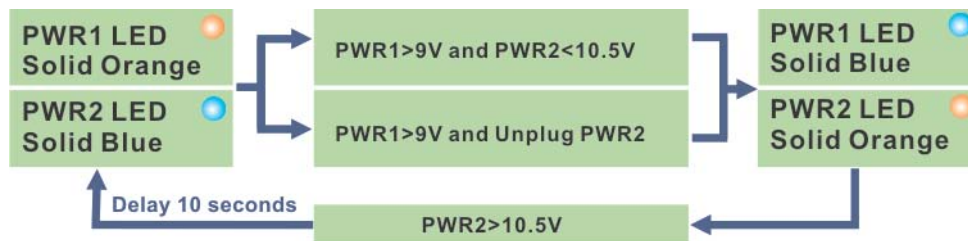


Figure 3-43: ACC Off: Switch Between PWR1 and PWR2

### 3.8.2.3 Shutdown

The system will shutdown in the following situations:

- Power 2 < 10.5V and Power 1 < 9V
- Press  +  buttons for 6 seconds

The following flow diagram shows the system shutdown process and the LED statuses.

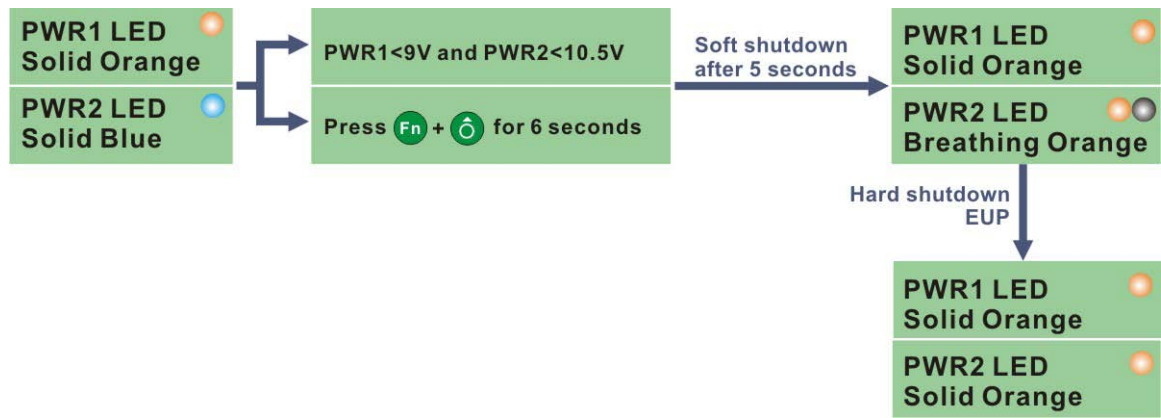


Figure 3-44: ACC Off: Shutdown




**NOTE:**

The power LED turns off when the power cable is unplugged from the system.

### 3.9 Remote Control

The UPC-V315-QM77 comes with a remote control for easy configuration. **Figure 3-45** shows the remote control and its function keys.

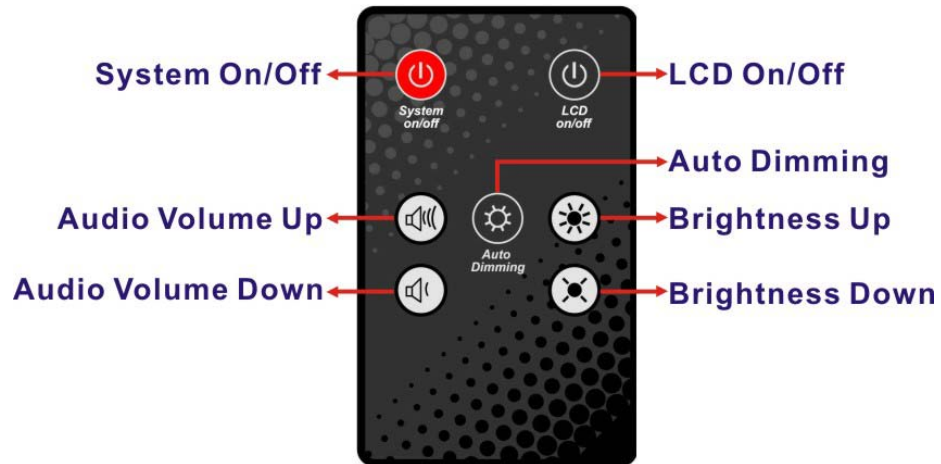

**Figure 3-45: Remote Control**

- **System On/Off:** Press this button to turn the UPC-V315-QM77 on or off.
- **LCD On/Off.** Press this button to turn the LCD monitor on or off.
- **Auto-Dimming.** Press this button to turn the auto-dimming function on or off.
- **Brightness.** Use these control buttons to adjust the brightness of the LCD screen.
- **Volume.** Press these buttons to adjust the audio volume level.

Chapter

4

BIOS

---

## 4.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.

### 4.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

### 4.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **ESC** to quit. Navigation keys are shown in.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes
-	Decrease the numeric value or make changes
Page Up key	Move to the previous page
Page Dn key	Move to the next page

Key	Function
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2	Load previous values
F3	Load optimized defaults
F4	Save changes and Exit BIOS

**Table 4-1: BIOS Navigation Keys**

#### 4.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

#### 4.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the jumper described in Chapter 4.

#### 4.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Boot – Changes the system boot configuration.
- Security – Sets User and Supervisor Passwords.
- Save & Exit – Selects exit options and loads default settings

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.



## 4.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.					
Main	Advanced	Chipset	Boot	Security	Save & Exit
BIOS Information					Set the Date. Use Tab to switch between Data elements.
BIOS Vendor	American Megatrends				
Core Version	4.6.5.3				
Compliance	UEFI 2.3; PI 1.2				
Project Version	SE31AR12.ROM				
Build Date and Time	03/25/2013 10:54:06				
IWDD Vender	ICP				
IWDD Version	SE31ER13.BIN				
Processor Information					
Name	IvyBridge				
Brand String	Intel(R) Core(TM) i3-				
Frequency	1500 MHz				
Processor ID	306a9				
Stepping	E1				
Number of Processors	2Core(s) / 4Thread(s)				
Microcode Revision	10				
GT Info	GT2 (900 MHz)				
IGFX VBIOS Version	2137				
Memory RC Version	1.2.0.0				
Total Memory	2048 MB (DDR3)				
Memory Frequency	1333 MHz				
PCH Information					
Name	PantherPoint				
Stepping	04/C1				
LAN PHY Revision	C0				
ME FW Version	8.0.3.1427				
ME Firmware SKU	5MB				
-----					
SPI Clock Frequency				→←: Select Screen	
DOFR Support	Supported			↑↓: Select Item	
Read Status Clock Frequency	33 MHz			Enter: Select	
Write Status Clock Frequency	33 MHz			+/-: Change Opt.	
Fast Read Status Clock Frequency	33 MHz			F1: General Help	
System Date	[Mon 04/08/2013]			F2: Previous Values	
System Time	[15:10:27]			F3: Optimized Defaults	
Access Level	Administrator			F4: Save & Exit	
Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.					

**BIOS Menu 1: Main**

## UPC-V315-QM77 Panel PC

### → System Overview

The system overview lists a brief summary of the BIOS. The fields in system overview cannot be changed. The items shown in the system overview include:

- BIOS Information
- IWDD Information
- Processor Information
- Memory Information
- PCH Information
- ME Information
- SPI Clock Frequency

The **Main** menu has two user configurable fields:

### → System Date [xx/xx/xx]

Use the **System Date** option to set the system date. Manually enter the day, month and year.

### → System Time [xx:xx:xx]

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

## 4.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



### WARNING!

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

---

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit

> ACPI Settings
> RTC Wake Settings
> CPU Configuration
> SATA Configuration
> Intel(R) Rapid Start Technology
> USB Configuration
> F81866 Super IO Configuration
> F81866 H/M Monitor
> Serial Port Console Redirection
> iEi Feature

System ACPI Parameters
-----
-><: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
    
```

### BIOS Menu 2: Advanced

#### 4.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced

ACPI Settings
ACPI Sleep State          [S1 (CPU Stop Clock)]

Select ACPI sleep state
the system will enter
when the SUSPEND button
is pressed.
-----
-><: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
    
```

### BIOS Menu 3: ACPI Configuration

## UPC-V315-QM77 Panel PC


### → ACPI Sleep State [S1 (CPU Stop Clock)]

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- **S1 (CPU Stop Clock)** **DEFAULT** The system enters S1 (POS) sleep state. The system appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.
- **S3 (Suspend to RAM)** The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

### 4.3.2 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 4**) enables the system to wake at the specified time.

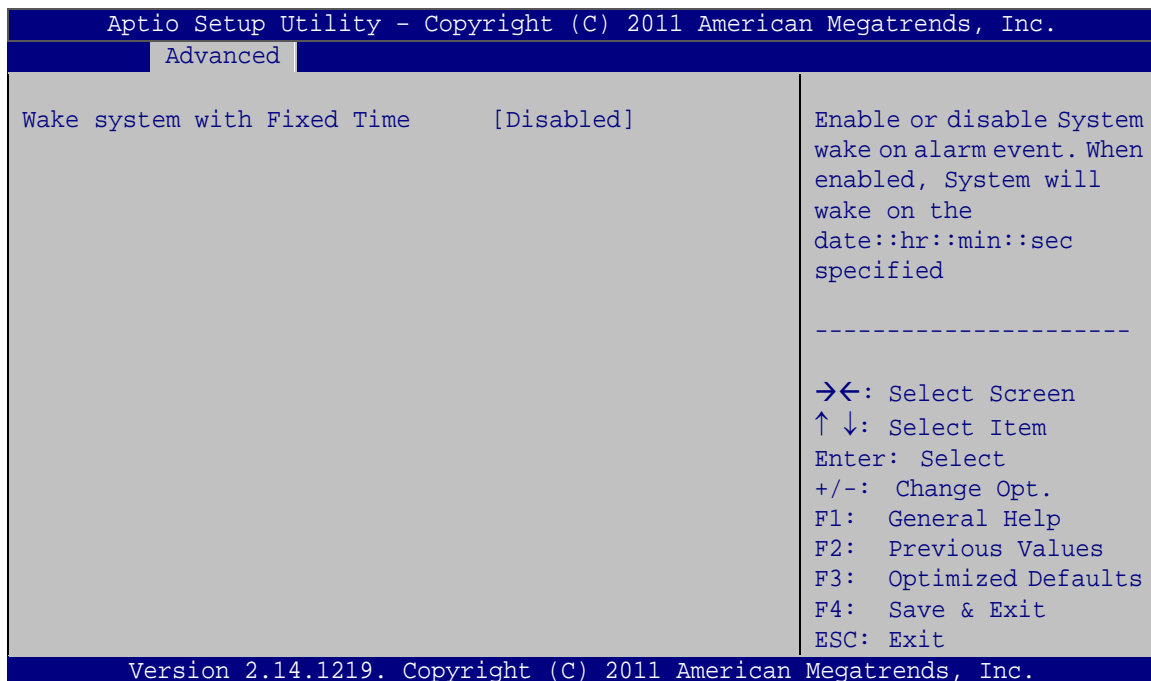

**BIOS Menu 4: RTC Wake Settings**

→ Wake system with Fixed Time [Disabled]

Use the **Wake system with Fixed Time** option to enable or disable the system wake on alarm event.

→ **Disabled**      **DEFAULT**      The real time clock (RTC) cannot generate a wake event

→ **Enabled**      If selected, the **Wake up every day** option appears allowing you to enable to disable the system to wake every day at the specified time. Besides, the following options appear with values that can be selected:

Wake up date

Wake up hour

Wake up minute

Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

### 4.3.3 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 5**) to view detailed CPU specifications or enable the Intel Virtualization Technology.

## UPC-V315-QM77 Panel PC

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.

Advanced

CPU Configuration		Enabled for Windows XP and Linux (OS optimized for Hyper-Threading Technology) and Disabled for other OS (OS not optimized for Hyper-Threading Technology). When Disabled only one thread per enabled core is enabled.
Intel(R) Core(TM) i3-3217UE CPU @ 1.60GHz		
CPU Signature	306a9	
Microcode Patch	10	
Max CPU Speed	1600 MHz	
Min CPU Speed	800 MHz	
CPU Speed	1500 MHz	
Processor Cores	2	
Intel HT Technology	Supported	
Intel VT-x Technology	Supported	
Intel SMX Technology	Not Supported	
64-bit	Supported	
L1 Data Cache	32 kB x 2	----- →←: Select Screen ↑ ↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
L1 Code Cache	32 kB x 2	
L2 Cache	256 kB x 2	
L3 Cache	3072 kB	
Hyper-Threading	[Enabled]	
Intel Virtualization Technology	[Disabled]	

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.

### BIOS Menu 5: CPU Configuration

#### → Hyper-threading [Enabled]

Use the **Hyper-threading** function to enable or disable the CPU hyper threading function.

→ **Disabled** Disables the use of hyper-threading technology

→ **Enabled** **DEFAULT** Enables the use of hyper-threading technology

#### → Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

→ **Disabled** **DEFAULT** Disables Intel Virtualization Technology.

→ **Enabled** Enables Intel Virtualization Technology.

#### 4.3.4 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 6**) to change and/or set the configuration of the SATA devices installed in the system.



#### BIOS Menu 6: SATA Configuration

##### → SATA Mode Selection [IDE]

Use the **SATA Mode Selection** option to configure SATA devices as normal IDE devices.

- **IDE**                      **DEFAULT**      Configures SATA devices as normal IDE device.
- **AHCI**    Configures SATA devices as AHCI device.
- **RAID**    Configures SATA devices as RAID device.

#### 4.3.5 Intel(R) Rapid Start Technology

Use the **Intel(R) Rapid Start Technology** menu (**BIOS Menu 7**) to configure Intel Rapid Start Technology support.

## UPC-V315-QM77 Panel PC

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
  Advanced
Intel(R) Rapid Start Technology [Disabled]

-----
-><: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.

```

### BIOS Menu 7: Intel(R) Rapid Start Technology

#### 4.3.6 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 8**) to read USB configuration information and configure the USB settings.

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
  Advanced
USB Configuration
USB Devices:
  1 Keyboard, 2 Hubs
Legacy USB Support [Enabled]

Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.

-----
-><: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.

```

### BIOS Menu 8: USB Configuration



➔ **USB Devices**

The **USB Devices** field lists the USB devices that are enabled on the system

➔ **Legacy USB Support [Enabled]**

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- ➔ **Enabled**      **DEFAULT**      Legacy USB support enabled
- ➔ **Disabled**                      Legacy USB support disabled
- ➔ **Auto**                              Legacy USB support disabled if no USB devices are connected

#### 4.3.7 F81866 Super IO Configuration

Use the **F81866 Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the parallel ports and serial ports.

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
  Advanced
-----
F81866 Super IO Configuration
F81866 Super IO Chip           F81866
> Serial Port 1 Configuration
> Serial Port 2 Configuration
> Serial Port 3 Configuration
> Serial Port 4 Configuration

Set Parameters of Serial
Port 1 (COMA)


-----
➔←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
    
```

**BIOS Menu 9: F81866 Super IO Configuration**

### 4.3.7.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

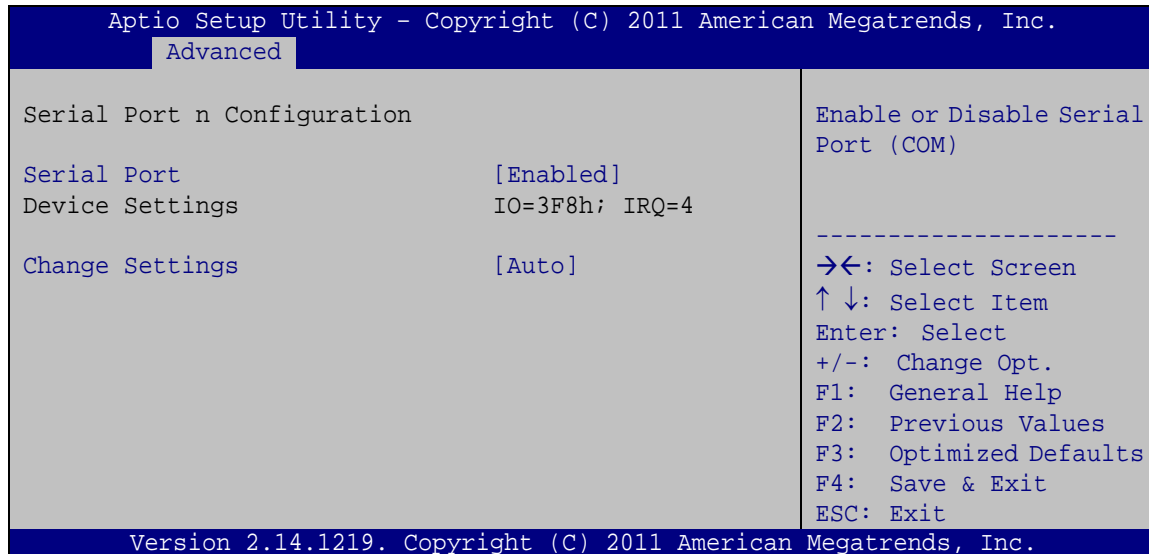

#### BIOS Menu 10: Serial Port n Configuration Menu

##### 4.3.7.1.1 Serial Port 1 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled**                      Disable the serial port
- **Enabled**            **DEFAULT**      Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto**            **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.
- **IO=3F8h;**  
**IRQ=4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ4

- ➔ **IO=3F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4
- ➔ **IO=2F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4

#### 4.3.7.1.2 Serial Port 2 Configuration

##### ➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled**                      Disable the serial port
- ➔ **Enabled**                      **DEFAULT**                      Enable the serial port

##### ➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto**                      **DEFAULT**                      The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=2F8h;**  
**IRQ=4**                      Serial Port I/O port address is 2F8h and the interrupt address is IRQ4
- ➔ **IO=3F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4
- ➔ **IO=2F8h;**  
**IRQ=3, 4**                      Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4

#### 4.3.7.1.3 Serial Port 3 Configuration

##### ➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled**                      Disable the serial port

➔ **Enabled**      **DEFAULT**      Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

➔ **Auto**      **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.

➔ **IO=2E0h;**  
**IRQ=5**      Serial Port I/O port address is 2E0h and the interrupt address is IRQ5

➔ **IO=2E0h;**  
**IRQ=5, 7**      Serial Port I/O port address is 2E0h and the interrupt address is IRQ5, 7

➔ **IO=2E8h;**  
**IRQ=5, 7**      Serial Port I/O port address is 2E8h and the interrupt address is IRQ5, 7

#### 4.3.7.1.4 Serial Port 4 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

➔ **Disabled**      Disable the serial port

➔ **Enabled**      **DEFAULT**      Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

➔ **Auto**      **DEFAULT**      The serial port IO port address and interrupt address are automatically detected.

➔ **IO=2E8h;**  
**IRQ=7**      Serial Port I/O port address is 2E8h and the interrupt address is IRQ7

- ➔ **IO=2E0h;**                      Serial Port I/O port address is 2E0h and the interrupt address is IRQ5, 7  
**IRQ=5, 7**
- ➔ **IO=2E8h;**                      Serial Port I/O port address is 2E8h and the interrupt address is IRQ5, 7  
**IRQ=5, 7**

- ➔ Device Mode [RS485/RS422]

The **Device Mode** shows Serial Port 4 provides RS-485/RS-422 communications.

#### 4.3.8 H/W Monitor

The H/W Monitor menu (**BIOS Menu 11**) shows the operating temperature, fan speeds and system voltages.

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
  Advanced
PC Health Status

CPU Temperature           :+50 C
Accuracy: 1.(-5~+10)degree around 100 degree
                2.(-10~+15)degree around 50 degree
System Temperature       :+41 C
V_CORE                   :+0.808 V
V_5S                     :+5.129 V
V_12S                    :+11.968 V
V_1.5V                   :+1.600 V
VSB5V                    :+5.136 V
VCC3V                    :+3.344 V
VSB3V                    :+3.360 V

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save
ESC  Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
    
```

#### BIOS Menu 11: Hardware Health Configuration

- ➔ PC Health Status

The following system parameters and values are shown. The system parameters that are monitored are:


- Temperatures:
  - CPU Temperature

## UPC-V315-QM77 Panel PC

- System Temperature
- Voltages:
  - V\_CORE
  - V\_5S
  - V\_12S
  - V\_1.5V
  - VSB5V
  - VCC3V
  - VSB3V

### 4.3.9 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 12**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

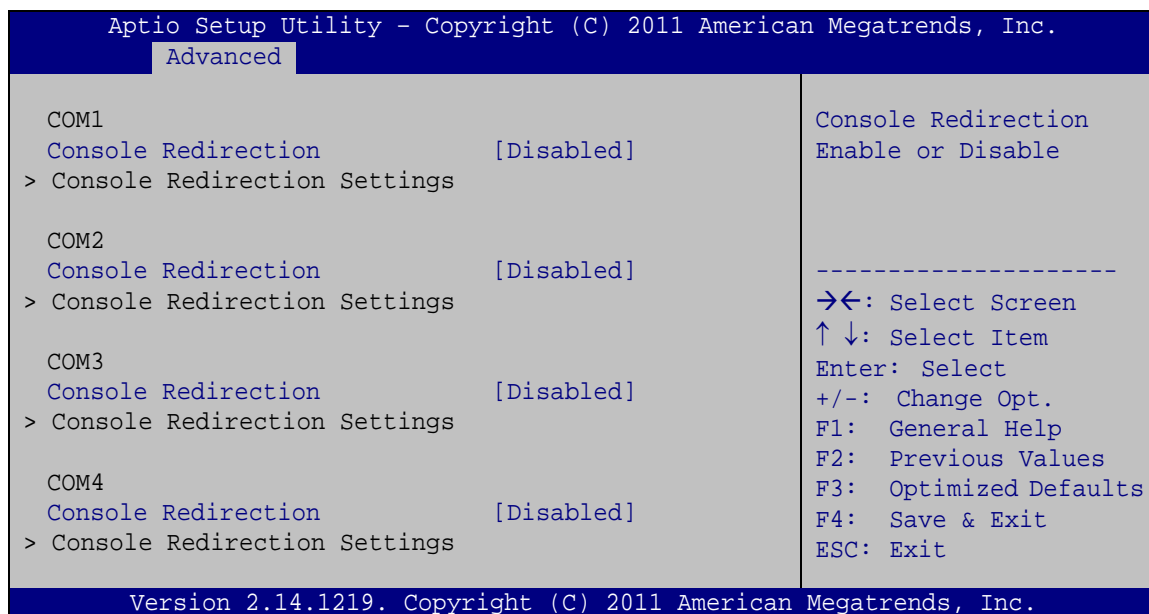

#### BIOS Menu 12: Serial Port Console Redirection

➔ Console Redirection [Disabled]

Use **Console Redirection** option to enable or disable the console redirection function.

➔ **Disabled**    **DEFAULT**    Disabled the console redirection function

→ **Enabled** Enabled the console redirection function

→ **Terminal Type [ANSI]**

Use the **Terminal Type** option to specify the remote terminal type.

→ **VT100** The target terminal type is VT100

→ **VT100+** The target terminal type is VT100+

→ **VT-UTF8** The target terminal type is VT-UTF8

→ **ANSI** **DEFAULT** The target terminal type is ANSI

→ **Bits per second [115200]**

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

→ **9600** Sets the serial port transmission speed at 9600.

→ **19200** Sets the serial port transmission speed at 19200.

→ **38400** Sets the serial port transmission speed at 38400.

→ **57600** Sets the serial port transmission speed at 57600.

→ **115200** **DEFAULT** Sets the serial port transmission speed at 115200.

→ **Data Bits [8]**

Use the **Data Bits** option to specify the number of data bits.

→ **7** Sets the data bits at 7.

→ **8** **DEFAULT** Sets the data bits at 8.

→ **Parity [None]**

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

## UPC-V315-QM77 Panel PC

- **None**      **DEFAULT**      No parity bit is sent with the data bits.
- **Even**      The parity bit is 0 if the number of ones in the data bits is even.
- **Odd**      The parity bit is 0 if the number of ones in the data bits is odd.
- **Mark**      The parity bit is always 1. This option does not provide error detection.
- **Space**      The parity bit is always 0. This option does not provide error detection.

### → Stop Bits [1]


Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- **1**      **DEFAULT**      Sets the number of stop bits at 1.
- **2**      Sets the number of stop bits at 2.

### 4.3.10 iEi Feature

Use the **iEi Feature** menu (**BIOS Menu 13**) to configure One Key Recovery function.



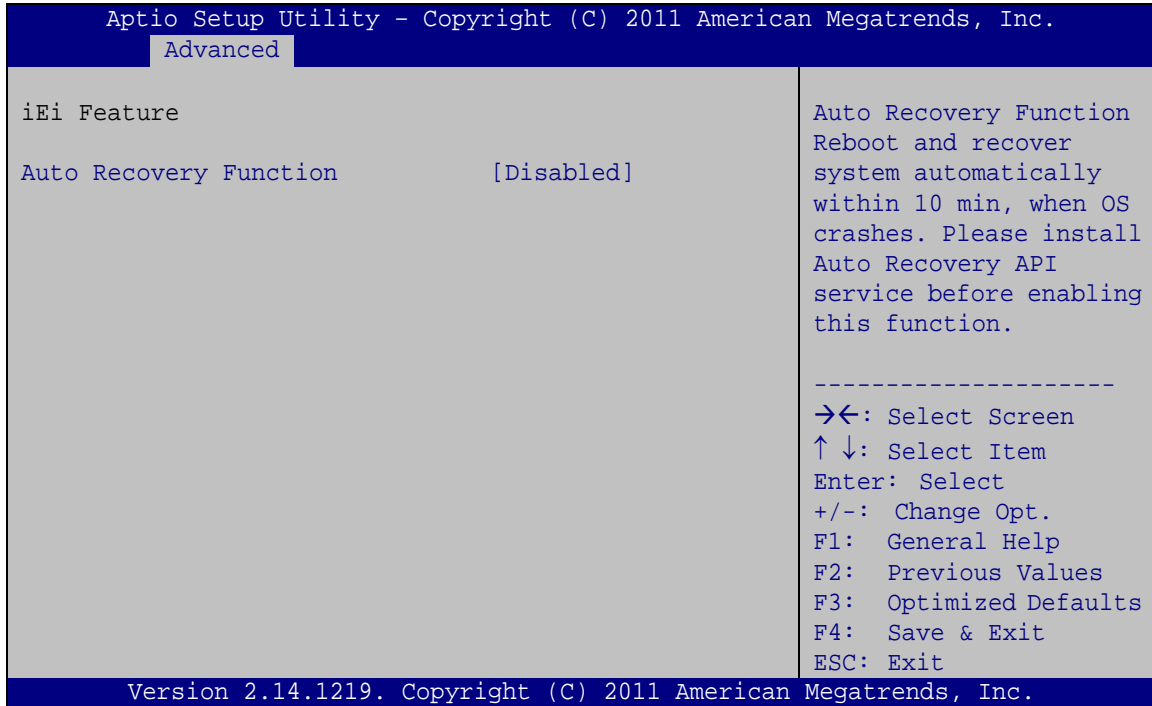

### BIOS Menu 13: iEi Feature

→ Auto Recovery Function [Disabled]

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

- **Disabled**     **DEFAULT**     Auto recovery function disabled
- **Enabled**     Auto recovery function enabled

## 4.4 Chipset

Use the **Chipset** menu (**BIOS Menu 14**) to access the PCH IO and System Agent (SA) configuration menus.



### WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

```
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit
-----
> PCH-IO Configuration
> System Agent (SA) Configuration


PCH Parameters
-----
-><: Select Screen
↑ ↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
```

**BIOS Menu 14: Chipset**

#### 4.4.1 PCH-IO Configuration

Use the **PCH-IO Configuration** menu (**BIOS Menu 15**) to configure the PCH parameters.

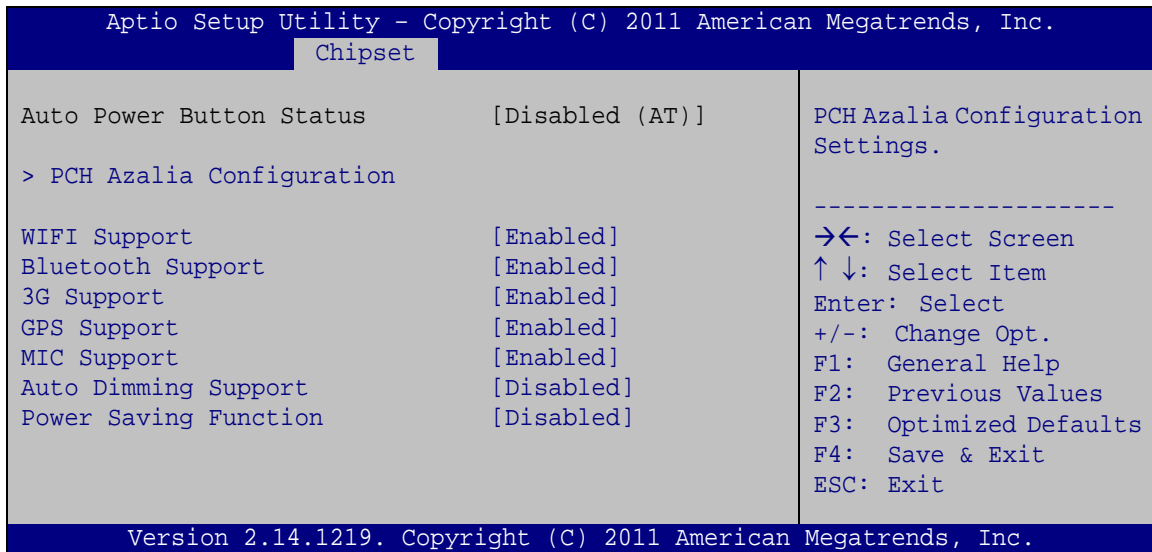

##### BIOS Menu 15: PCH-IO Configuration

###### → WIFI Support [Enabled]

Use the **WIFI Support** option to enable or disable the Wi-Fi function.

→ **Enabled** **DEFAULT** Enables Wi-Fi function

→ **Disabled** Disables Wi-Fi function

###### → Bluetooth Support [Enabled]

Use the **Bluetooth Support** option to enable or disable the Bluetooth function.

→ **Enabled** **DEFAULT** Enables Bluetooth function

→ **Disabled** Disables Bluetooth function

###### → 3G Support [Enabled]

Use the **3G Support** option to enable or disable the 3G connection.

→ **Enabled** **DEFAULT** Enables 3G connection

## UPC-V315-QM77 Panel PC

→ **Disabled**                      Disables 3G connection

→ GPS Support [Enabled]

Use the **GPS Support** option to enable or disable the GPS function.

→ **Enabled**    **DEFAULT**      Enables GPS function

→ **Disabled**                      Disables GPS function

→ MIC Support [Enabled]

Use the **MIC Support** option to enable or disable the microphone.

→ **Enabled**    **DEFAULT**      Enables microphone

→ **Disabled**                      Disables microphone

→ Auto Dimming Support [Disabled]

Use the **Auto Dimming Support** option to enable or disable the auto dimming function.

→ **Enabled**                      Enables auto dimming function

→ **Disabled**    **DEFAULT**      Disables auto dimming function

→ Power Saving Function [Disabled]


Use the **Power Saving Function** BIOS option to enable or disable the power saving function.

→ **Enabled**                      Power saving function is enabled. It will reduce power consumption when the system is off.

→ **Disabled**                      **DEFAULT**      Power saving function is disabled.

#### 4.4.1.1 PCH Azalia Configuration

Use the **PCH Azalia Configuration** menu (**BIOS Menu 16**) to configure the PCH Azalia settings.

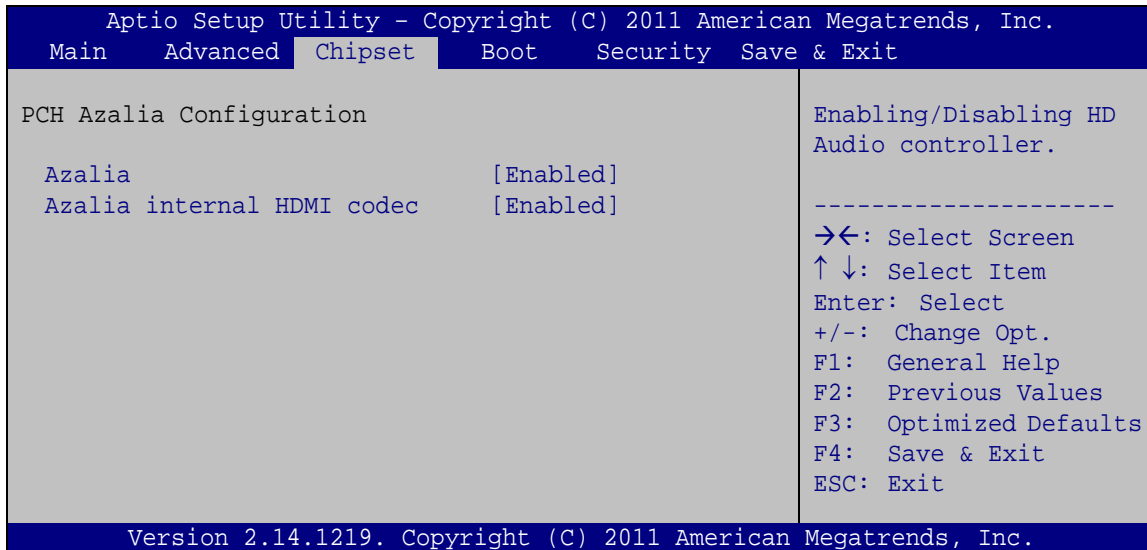

#### BIOS Menu 16: PCH Azalia Configuration Menu

##### → Azalia [Enabled]

Use the **Azalia** option to enable or disable the High Definition Audio controller.

- **Disabled**                      The onboard High Definition Audio controller is disabled
- **Enabled    DEFAULT**        The onboard High Definition Audio controller automatically detected and enabled

##### → Azalia internal HDMI codec [Enabled]


Use the **Azalia internal HDMI codec** option to enable or disable the internal HDMI codec for High Definition Audio.

- **Disabled**                      Disables the internal HDMI codec for High Definition Audio
- **Enabled    DEFAULT**        Enables the internal HDMI codec for High Definition Audio

## UPC-V315-QM77 Panel PC

### 4.4.2 System Agent (SA) Configuration


Use the **System Agent (SA) Configuration** menu (**BIOS Menu 17**) to configure the System Agent (SA) parameters.

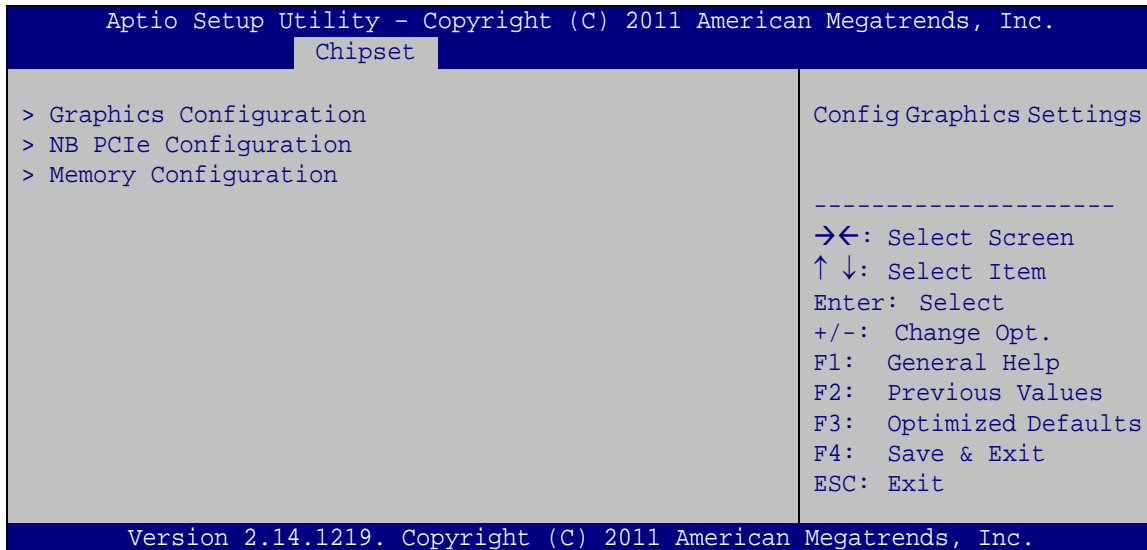

#### BIOS Menu 17: System Agent (SA) Configuration

#### 4.4.2.1 Graphics Configuration

Use the **Graphics Configuration (BIOS Menu 18)** menu to configure the video device connected to the system.

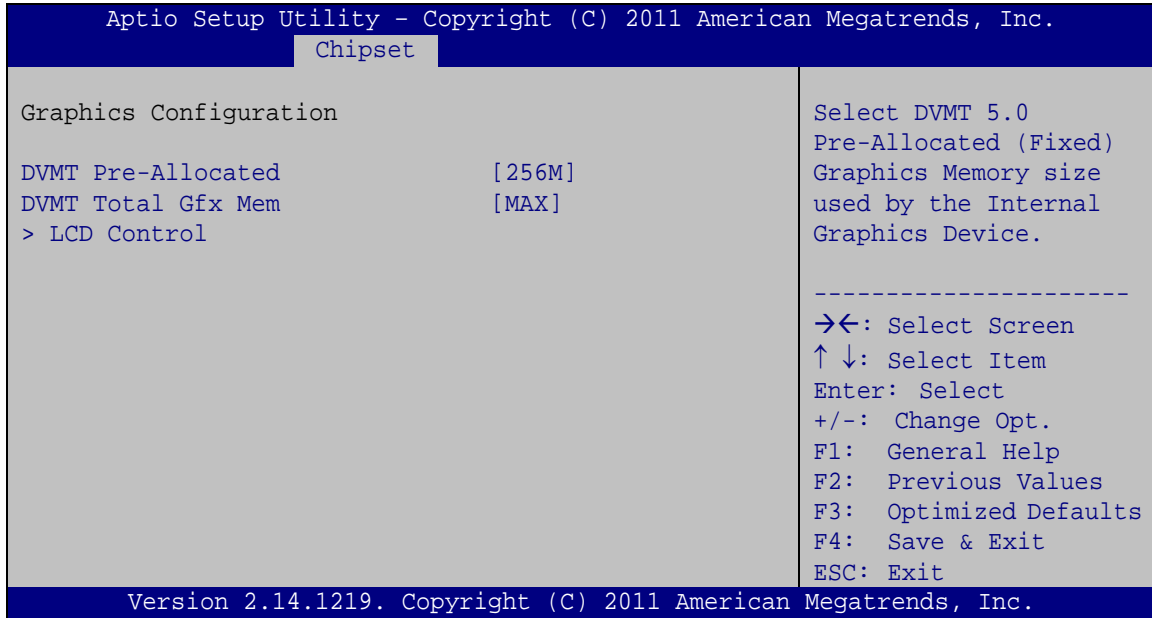

### BIOS Menu 18: Graphics Configuration

#### → DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to set the amount of system memory allocated to the integrated graphics processor when the system boots. The system memory allocated can then only be used as graphics memory, and is no longer available to applications or the operating system. Configuration options are listed below:


- 32M
- 64M
- 128M
- 256M                      **Default**
- 512M

#### → DVMT Total Gfx Mem [MAX]

Use the **DVMT Total Gfx Mem** option to select DVMT5.0 total graphic memory size used by the internal graphic device. The following options are available:

- 128M
- 256M
- MAX                              **Default**

#### 4.4.2.1.1 LCD Control

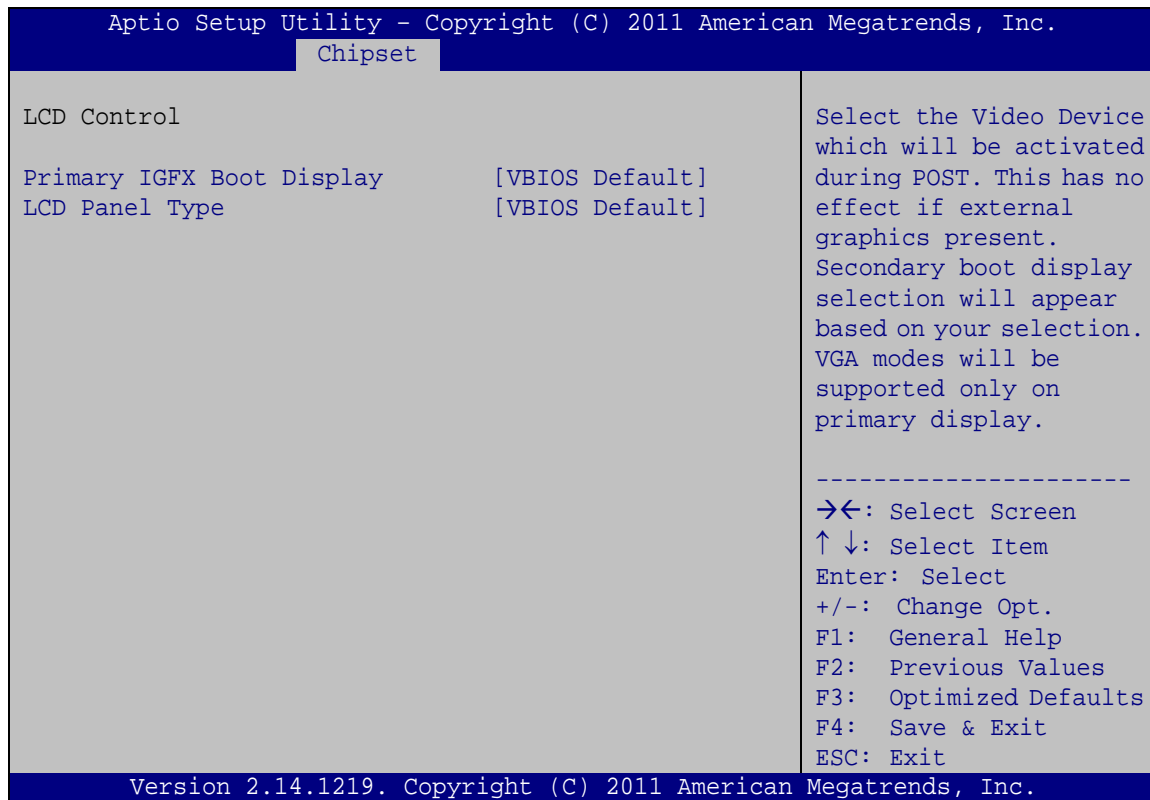

#### BIOS Menu 19: LCD Control

##### → Primary IGFX Boot Display [VBIOS]

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS                      **DEFAULT**
- CRT
- HDMI
- LVDS

##### → LCD Panel Type [VBIOS]


Use the **LCD Panel Type** option to select the type of flat panel connected to the system. Configuration options are listed below.

- VBIOS                      **DEFAULT**
- 640x480                      LVDS



- 800x600 LVDS
- 1024x768 LVDS1
- 1280x1024 LVDS
- 1400x1050(RB) LVDS1
- 1400x1050 LVDS2
- 1600x1200 LVDS
- 1366x768 LVDS
- 1680x1050 LVDS
- 1920x1200 LVDS
- 1440x900 LVDS
- 1600x1200 LVDS
- 1024x768 LVDS2
- 1280x800 LVDS
- 1920x1080 LVDS
- 2048x1536 LVDS

#### 4.4.2.2 NB PCIe Configuration

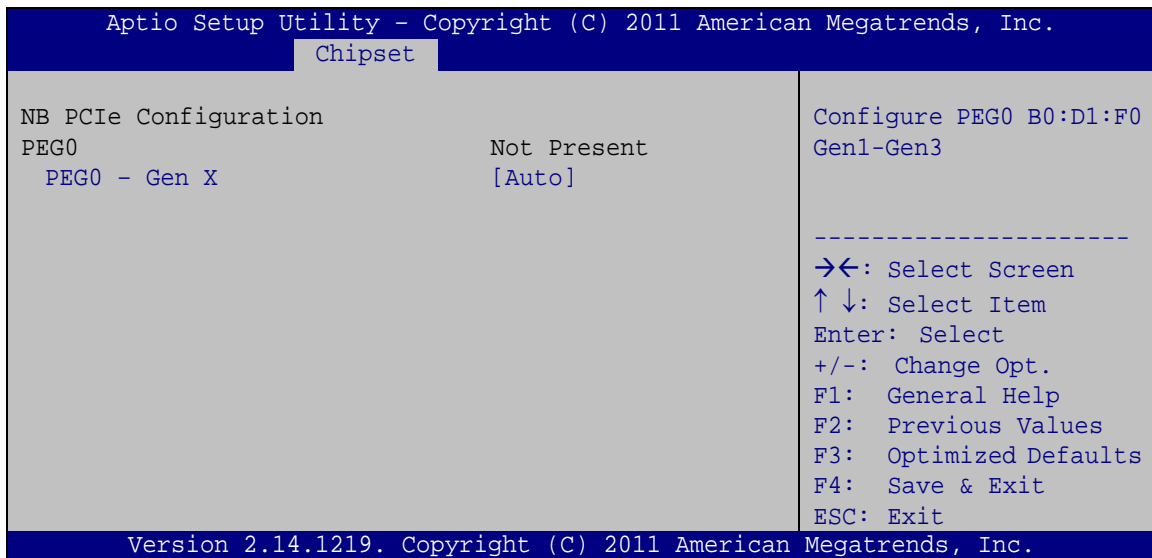

#### BIOS Menu 20: NB PCIe Configuration

→ PEG0 - Gen X [Auto]


Use the **PEG0 - Gen X** option to select the support type of the PCI Express (PEG) controller. The following options are available:

## UPC-V315-QM77 Panel PC

- Auto                   **Default**
- Gen1
- Gen2
- Gen3

### 4.4.2.3 Memory Configuration


Use the **Memory Configuration** submenu (**BIOS Menu 21**) to view memory information.

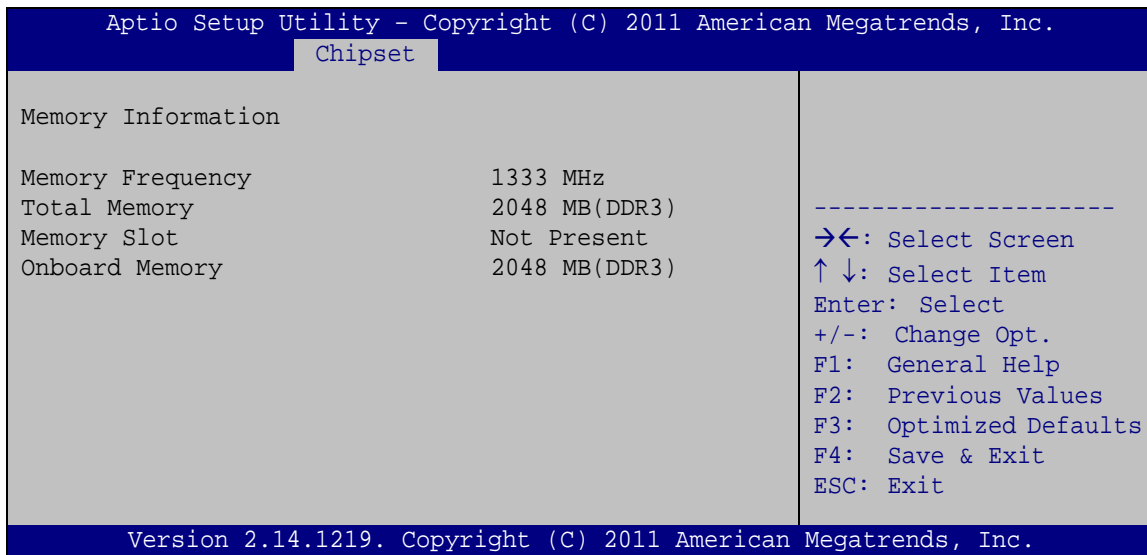

### BIOS Menu 21: Memory Configuration

## 4.5 Boot

Use the **Boot** menu (**BIOS Menu 22**) to configure system boot options.

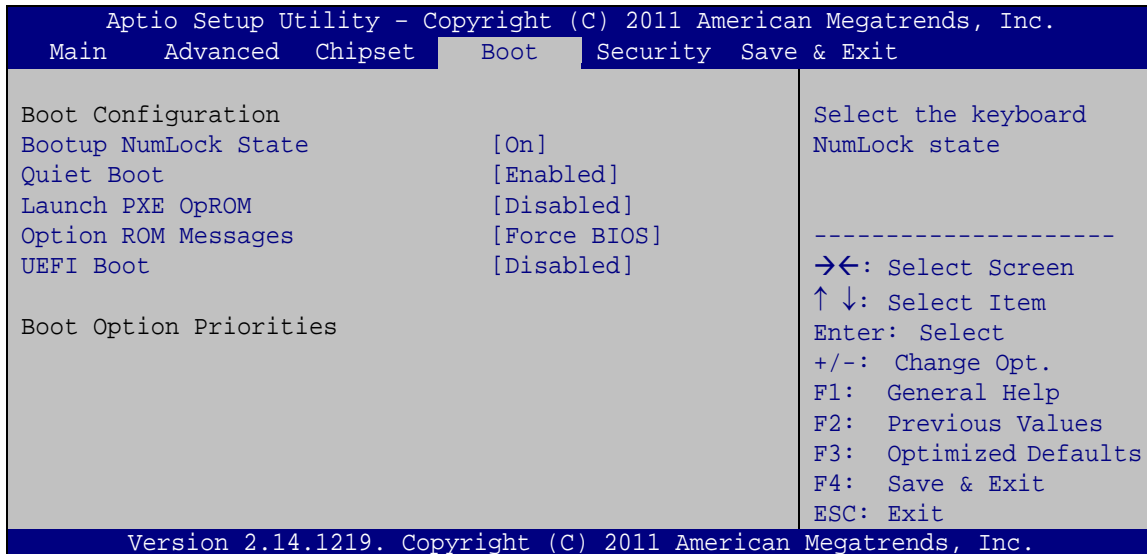

### BIOS Menu 22: Boot

#### → Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ **On**                      **DEFAULT**                      Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ **Off**                                      Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

## UPC-V315-QM77 Panel PC

### → Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** Normal POST messages displayed
- **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

### → Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- **Disabled** **DEFAULT** Ignore all PXE Option ROMs
- **Enabled** Load PXE Option ROMs.

### → Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
- **Keep Current** Sets display mode to current.

### → UEFI Boot [Disabled]

Use the **UEFI Boot** option to enable or disable to boot from the UEFI devices.

- **Enabled** Boot from UEFI devices is enabled.
- **Disabled** **DEFAULT** Boot from UEFI devices is disabled.



## 4.7 Save & Exit

Use the **Safe & Exit** menu (**BIOS Menu 24**) to load default BIOS values, optimal failsafe values and to save configuration changes.

```

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main   Advanced  Chipset   Boot     Security  Save & Exit
-----
Save Changes and Reset
Discard Changes and Reset

Restore Defaults
Save as User Defaults
Restore User Defaults

Exit the system after
saving the changes.

-----
-><: Select Screen
↑ ↓: Select Item
Enter: Select
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.14.1219. Copyright (C) 2011 American Megatrends, Inc.
  
```

### BIOS Menu 24: Save & Exit

#### → Save Changes and Reset

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

#### → Discard Changes and Reset

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

#### → Restore Defaults

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

➔ Save as User Defaults

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

➔ Restore User Defaults

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Appendix

A

# BIOS Menu Options

---



➔ System Overview .....	55
➔ System Date [xx/xx/xx] .....	55
➔ System Time [xx:xx:xx] .....	55
➔ ACPI Sleep State [S1 (CPU Stop Clock)] .....	57
➔ Wake system with Fixed Time [Disabled].....	58
➔ Hyper-threading [Enabled].....	59
➔ Intel Virtualization Technology [Disabled] .....	59
➔ SATA Mode Selection [IDE] .....	60
➔ USB Devices .....	62
➔ Legacy USB Support [Enabled].....	62
➔ Serial Port [Enabled].....	63
➔ Change Settings [Auto] .....	63
➔ Serial Port [Enabled].....	64
➔ Change Settings [Auto] .....	64
➔ Serial Port [Enabled].....	64
➔ Change Settings [Auto] .....	65
➔ Serial Port [Enabled].....	65
➔ Change Settings [Auto] .....	65
➔ Device Mode [RS485/RS422].....	66
➔ PC Health Status .....	66
➔ Console Redirection [Disabled].....	67
➔ Terminal Type [ANSI].....	68
➔ Bits per second [115200].....	68
➔ Data Bits [8] .....	68
➔ Parity [None].....	68
➔ Stop Bits [1].....	69
➔ Auto Recovery Function [Disabled].....	70
➔ WIFI Support [Enabled] .....	72
➔ Bluetooth Support [Enabled] .....	72
➔ 3G Support [Enabled] .....	72
➔ GPS Support [Enabled] .....	73
➔ MIC Support [Enabled] .....	73
➔ Auto Dimming Support [Disabled] .....	73
➔ Power Saving Function [Disabled].....	73

→ Azalia [Enabled] .....	74
→ Azalia internal HDMI codec [Enabled] .....	74
→ DVMT Pre-Allocated [256M] .....	76
→ DVMT Total Gfx Mem [MAX].....	76
→ Primary IGFX Boot Display [VBIOS] .....	77
→ LCD Panel Type [VBIOS] .....	77
→ PEG0 – Gen X [Auto] .....	78
→ Bootup NumLock State [On].....	80
→ Quiet Boot [Enabled] .....	81
→ Launch PXE OpROM [Disabled] .....	81
→ Option ROM Messages [Force BIOS].....	81
→ UEFI Boot [Disabled] .....	81
→ Administrator Password .....	82
→ User Password .....	82
→ Save Changes and Reset .....	83
→ Discard Changes and Reset .....	83
→ Restore Defaults .....	83
→ Save as User Defaults .....	84
→ Restore User Defaults .....	84

Appendix

B

# One Key Recovery

---

## B.1 One Key Recovery Introduction

The IEI one key recovery is an easy-to-use front end for the Norton Ghost system backup and recovery tool. This tool provides quick and easy shortcuts for creating a backup and reverting to that backup or reverting to the factory default settings.



### NOTE:

The latest One Key Recovery software provides an auto recovery function that allows a system running Microsoft Windows OS to automatically restore from the factory default image after encountering a Blue Screen of Death (BSoD) or a hang for around 10 minutes. Please refer to Section B.3 for the detailed setup procedure.

---

The IEI One Key Recovery tool menu is shown below.

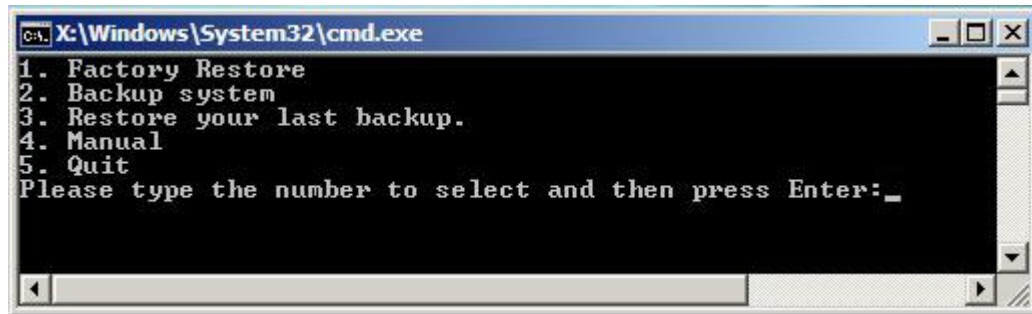


Figure B-1: IEI One Key Recovery Tool Menu

Prior to using the IEI One Key Recovery tool (as shown in **Figure B-1**) to backup or restore Windows system, five setup procedures are required.

3. Hardware and BIOS setup (see **Section B.2.1**)
4. Create partitions (see **Section B.2.2**)
5. Install operating system, drivers and system applications (see **Section B.2.3**)
6. Build the recovery partition (see **Section B.2.4**)
7. Create factory default image (see **Section B.2.5**)

After completing the five initial setup procedures as described above, users can access the recovery tool by pressing <F3> while booting up the system. The detailed information of each function is described in **Section B.5**.


**NOTE:**

The initial setup procedures for Linux system are described in **Section B.3**.

### B.1.1 System Requirement


**NOTE:**

The recovery CD can only be used with IEI products. The software will fail to run and a warning message will appear when used on non-IEI hardware.



To create the system backup, the main storage device must be split into two partitions (three partitions for Linux). The first partition will be for the operating system, while the second partition will be invisible to the operating system and contain the backup made by the one key recovery software.

The partition created for recovery images must be big enough to contain both the factory default image and the user backup image. The size must be calculated before creating the

partitions. Please take the following table as a reference when calculating the size of the partition.

	OS	OS Image after Ghost	Compression Ratio
<b>Windows® 7</b>	7 GB	5 GB	70%
<b>Windows® XPE</b>	776 MB	560 MB	70%
<b>Windows® CE 6.0</b>	36 MB	28 MB	77%



**NOTE:**

Specialized tools are required to change the partition size if the operating system is already installed.

### B.1.2 Supported Operating System

The recovery CD is compatible with both Microsoft Windows and Linux operating systems (OS). The supported OS versions are listed below.

- Microsoft Windows
  - Windows XP (Service Pack 2 or 3 required)
  - Windows Vista
  - Windows 7
  - Windows CE 5.0
  - Windows CE 6.0
  - Windows XP Embedded
- Linux
  - Fedora Core 12 (Constantine)
  - Fedora Core 11 (Leonidas)
  - Fedora Core 10 (Cambridge)
  - Fedora Core 8 (Werewolf)
  - Fedora Core 7 (Moonshine)
  - RedHat RHEL-5.4
  - RedHat 9 (Ghirke)

- Ubuntu 8.10 (Intrepid)
- Ubuntu 7.10 (Gutsy)
- Ubuntu 6.10 (Edgy)
- Debian 5.0 (Lenny)
- Debian 4.0 (Etch)
- SuSe 11.2
- SuSe 10.3

**NOTE:**

Installing unsupported OS versions may cause the recovery tool to fail.

---

## B.2 Setup Procedure for Windows

Prior to using the recovery tool to backup or restore, a few setup procedures are required.

**Step 4:** Hardware and BIOS setup (see **Section B.2.1**)

**Step 5:** Create partitions (see **Section B.2.2**)

**Step 6:** Install operating system, drivers and system applications (see **Section B.2.3**)

**Step 7:** Build the recovery partition (see **Section B.2.4**) or build the auto recovery partition (see **Section B.3**)

**Step 8:** Create factory default image (see **Section B.2.5**)

The detailed descriptions are described in the following sections.

---

**NOTE:**

The setup procedures described below are for Microsoft Windows operating system users. For Linux, most of the setup procedures are the same except for several steps described in **Section B.3**.

---

### B.2.1 Hardware and BIOS Setup

- Step 1:** Make sure the system is powered off and unplugged.
- Step 2:** Install a hard drive or SSD in the system. An unformatted and unpartitioned disk is recommended.
- Step 3:** Connect an optical disk drive to the system and insert the recovery CD.
- Step 4:** Turn on the system.
- Step 5:** Press the <DELETE> key as soon as the system is turned on to enter the BIOS.
- Step 6:** Select the connected optical disk drive as the 1<sup>st</sup> boot device. (**Boot → Boot Device Priority → 1<sup>st</sup> Boot Device**).
- Step 7:** Save changes and restart the computer. Continue to the next section for instructions on partitioning the internal storage.

### B.2.2 Create Partitions

To create the system backup, the main storage device must be split into two partitions (three partitions for Linux). The first partition will be for the operating system, while the second partition will be invisible to the operating system and contain the backup made by the one key recovery software.

- Step 1:** Put the recovery CD in the optical drive of the system.
- Step 2:** **Boot the system from recovery CD.** When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!



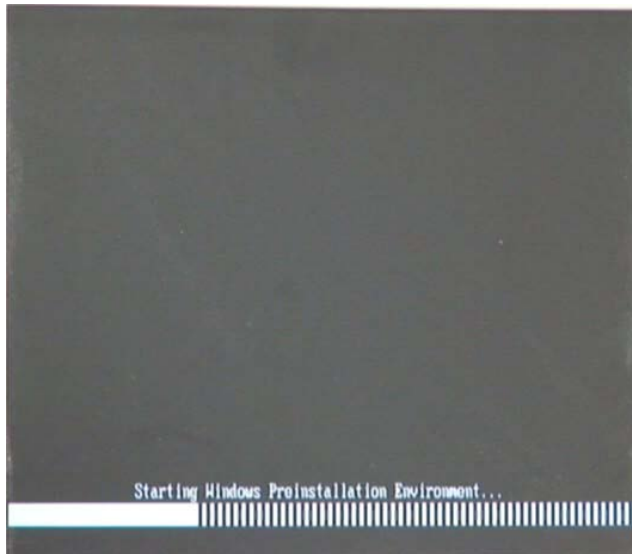


Figure B-2: Launching the Recovery Tool

Step 3: The recovery tool setup menu is shown as below.


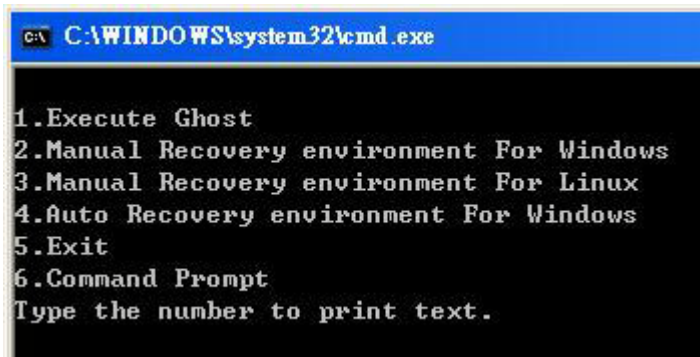


Figure B-3: Recovery Tool Setup Menu

Step 4: Press <6> then <Enter>.

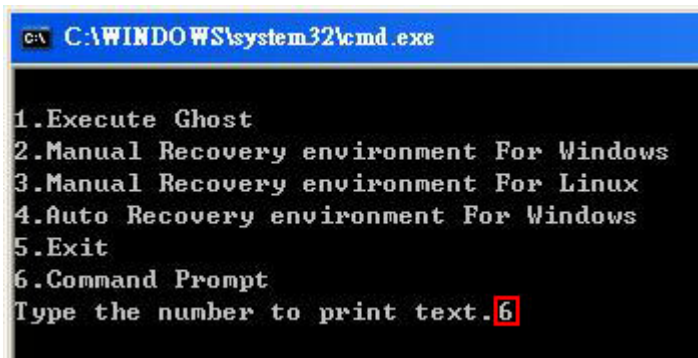

```
C:\WINDOWS\system32\cmd.exe

1.Execute Ghost
2.Manual Recovery environment For Windows
3.Manual Recovery environment For Linux
4.Auto Recovery environment For Windows
5.Exit
6.Command Prompt
Type the number to print text.6
```

Figure B-4: Command Prompt

**Step 5:** The command prompt window appears. Type the following commands (marked in red) to create two partitions. One is for the OS installation; the other is for saving recovery files and images which will be an invisible partition. (Press <Enter> after entering each line below)

```
system32>diskpart
DISKPART>list vol
DISKPART>sel disk 0
DISKPART>create part pri size= ____
DISKPART>assign letter=N
DISKPART>create part pri size= ____
DISKPART>assign letter=F
DISKPART>exit
system32>format N: /fs:ntfs /q /y
system32>format F: /fs:ntfs /q /v:Recovery /y
system32>exit
```

```

X:\I386\SYSTEM32\CMD.EXE

X:\I386\SYSTEM32>diskpart → Starts the Microsoft disk partitioning tool.

Microsoft DiskPart version 5.2.3790.1830
Copyright (C) 1999-2001 Microsoft Corporation.
On computer: MININT-JUC

DISKPART> list vol → Show partition information

   Volume ###  Ltr  Label          Fs          Type          Size         Status       Info
   -----
   Volume 0          X  CD_ROM         CDFS        DUD-ROM       405 MB       Healthy      Boot
   Volume 1          D                FAT32        Removeable   3854 MB       Healthy

DISKPART> sel disk 0 → Select a disk

Disk 0 is now the selected disk.

DISKPART> create part pri size=2000 → Create partition 1 and assign a size.
                                       This partition is for OS installation.
DiskPart succeeded in creating the specified partition.

DISKPART> assign letter=N → Assign partition 1 a code name (N).
DiskPart successfully assigned the drive letter or mount point.

DISKPART> create part pri size=1800 → Create partition 2 and assign a size.
                                       This partition is for recovery images.
DiskPart succeeded in creating the specified partition.

DISKPART> assign letter=F → Assign partition 2 a code name (F).
DiskPart successfully assigned the drive letter or mount point.

DISKPART> exit → Exit diskpart

X:\I386\SYSTEM32>format n: /fs:ntfs /q /y → Format partition 1 (N) as NTFS format.
The type of the file system is RAW.
The new file system is NTFS.
QuickFormatting 2000M
Creating file system structures.
Format complete.
 2048254 KB total disk space.
 2035620 KB are available.

X:\I386\SYSTEM32>format f: /fs:ntfs /q /v:Recovery /y
The type of the file system is RAW.
The new file system is NTFS.
QuickFormatting 1804M
Creating file system structures.
Format complete.
 1847474 KB total disk space.
 1835860 KB are available.

X:\I386\SYSTEM32>exit → Exit Windows PE
    
```

Figure B-5: Partition Creation Commands

**NOTE:**

Use the following commands to check if the partitions were created successfully.

```
X:\I386\SYSTEM32>diskpart
Microsoft DiskPart version 5.2.3790.1830
Copyright (C) 1999-2001 Microsoft Corporation.
On computer: MININT-JUC
DISKPART> sel disk 0
Disk 0 is now the selected disk.
DISKPART> list part
   Partition ###  Type              Size              Offset
-----
Partition 1      Primary           2000 MB           32 KB
Partition 2      Primary           1804 MB          2000 MB
DISKPART> exit
```

**Step 6:** Press any key to exit the recovery tool and automatically reboot the system.

Please continue to the following procedure: Build the Recovery Partition.

### B.2.3 Install Operating System, Drivers and Applications

Install the operating system onto the unlabelled partition. The partition labeled "Recovery" is for use by the system recovery tool and should not be used for installing the operating system or any applications.


**NOTE:**

The operating system installation program may offer to reformat the chosen partition. DO NOT format the partition again. The partition has already been formatted and is ready for installing the new operating system.

To install the operating system, insert the operating system installation CD into the optical drive. Restart the computer and follow the installation instructions.


## B.2.4 Building the Recovery Partition

- Step 1:** Put the recover CD in the optical drive.
- Step 2:** Start the system.
- Step 3:** **Boot the system from the recovery CD.** When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!

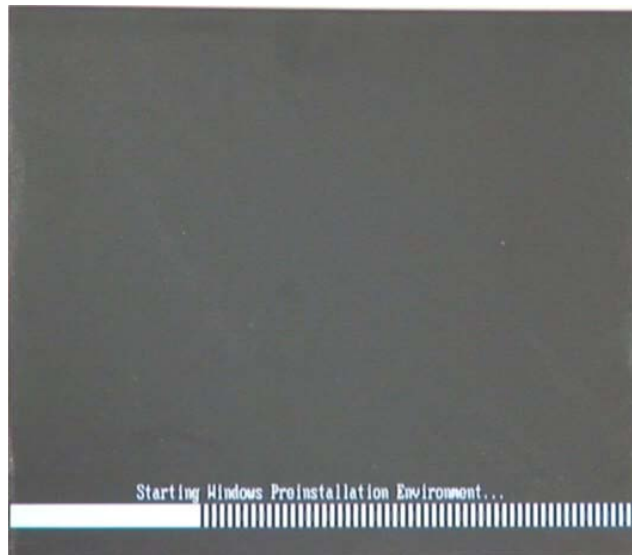

**Figure B-6: Launching the Recovery Tool**


- Step 4:** When the recovery tool setup menu appears, press <2> then <Enter>.

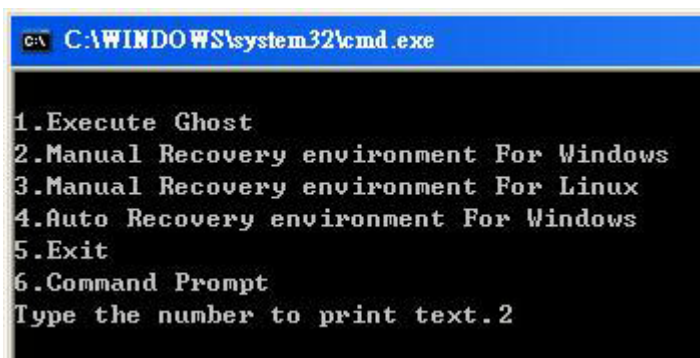

**Figure B-7: Manual Recovery Environment for Windows**


## UPC-V315-QM77 Panel PC

**Step 5:** The Symantec Ghost window appears and starts configuring the system to build a recovery partition. In this process the partition created for recovery files in **Section B.2.2** is hidden and the recovery tool is saved in this partition.

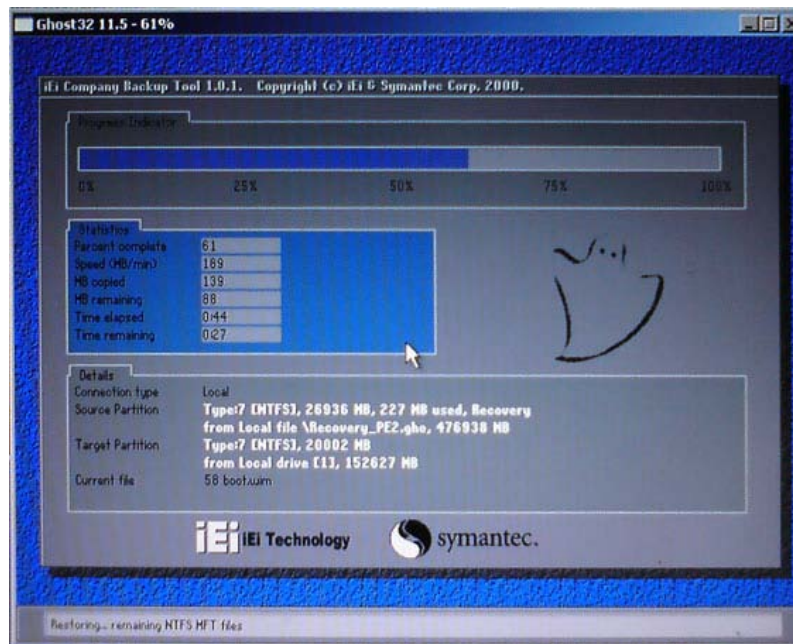

**Figure B-8: Building the Recovery Partition**

**Step 6:** After completing the system configuration, press any key in the following window to reboot the system.

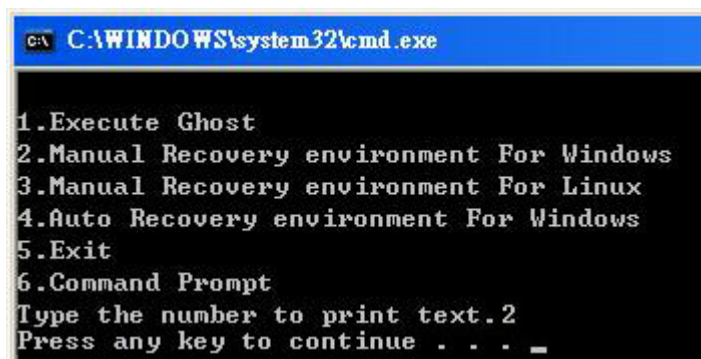

**Figure B-9: Press Any Key to Continue**

**Step 7:** Eject the recovery CD.

### B.2.5 Create Factory Default Image




#### NOTE:

Before creating the factory default image, please configure the system to a factory default environment, including driver and application installations.


To create a factory default image, please follow the steps below.

**Step 1:** Turn on the system. When the following screen displays (**Figure B-10**), press the <F3> key to access the recovery tool. The message will display for 10 seconds, please press F3 before the system boots into the operating system.

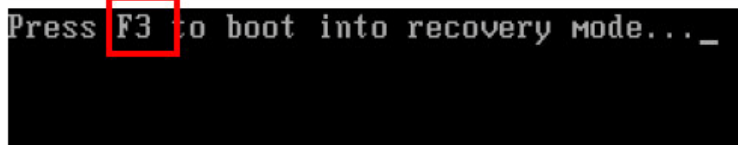


**Figure B-10: Press F3 to Boot into Recovery Mode**

**Step 2:** The recovery tool menu appears. Type <4> and press <Enter>. (**Figure B-11**)

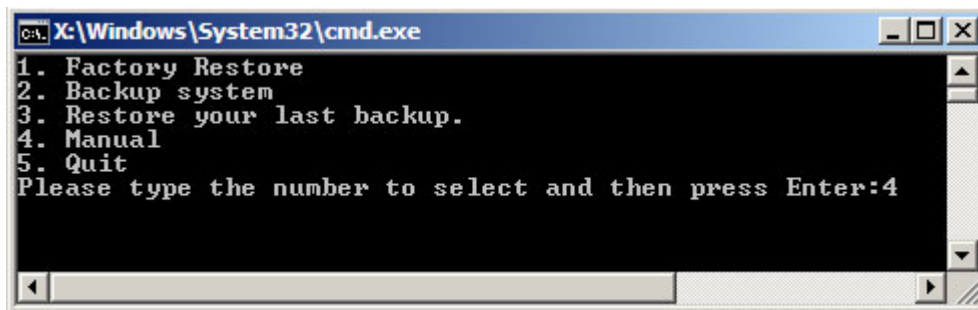


**Figure B-11: Recovery Tool Menu**

**Step 3:** The About Symantec Ghost window appears. Click **OK** button to continue.

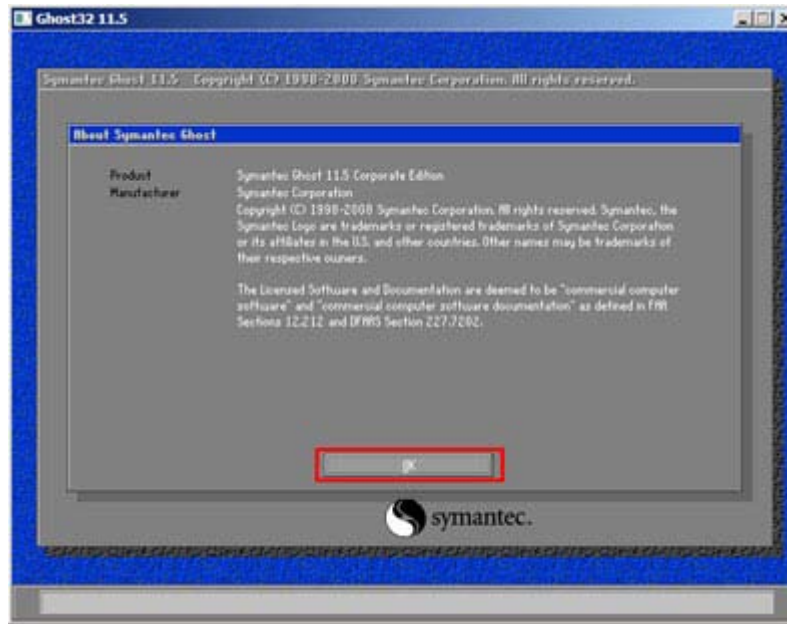

**Figure B-12: About Symantec Ghost Window**


**Step 4:** Use mouse to navigate to the option shown below (**Figure B-13**).

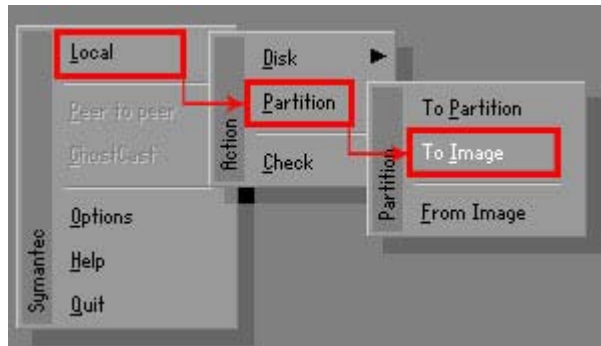

**Figure B-13: Symantec Ghost Path**


**Step 5:** Select the local source drive (Drive 1) as shown in **Figure B-14**. Then click OK.



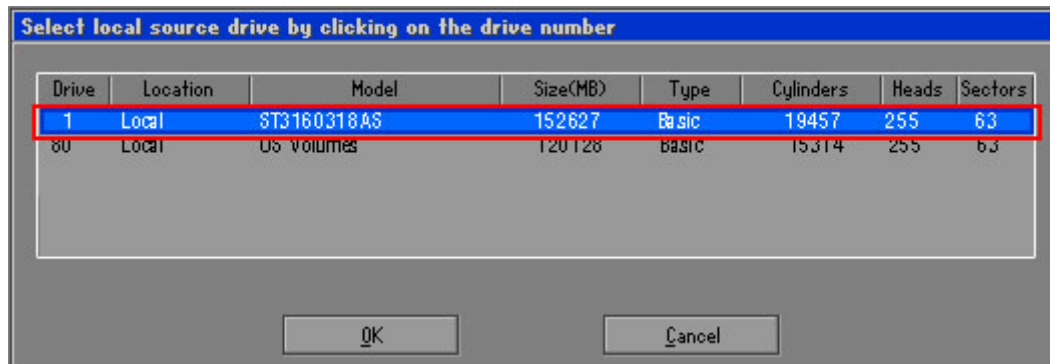

**Figure B-14: Select a Local Source Drive**

**Step 6:** Select a source partition (Part 1) from basic drive as shown in **Figure B-15**. Then click OK.

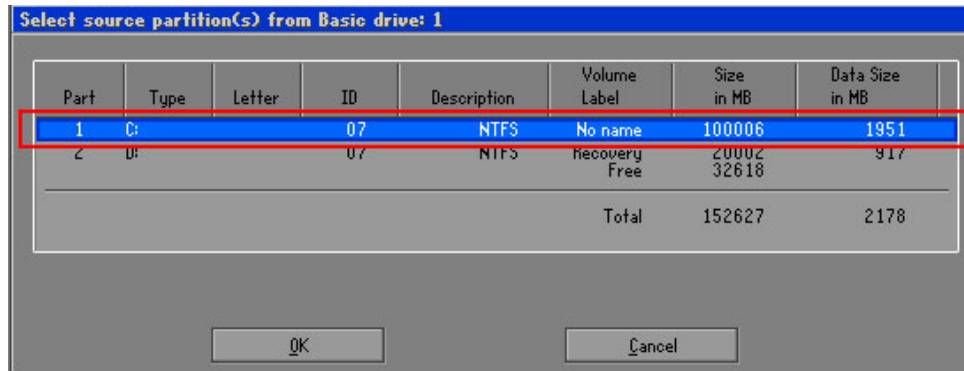


**Figure B-15: Select a Source Partition from Basic Drive**

**Step 7:** Select **1.2: [Recovery] NTFS drive** and enter a file name called **iei** (**Figure B-16**). Click **Save**. The factory default image will then be saved in the selected recovery drive and named **IEI.GHO**.




**WARNING:**

The file name of the factory default image must be **iei.GHO**.

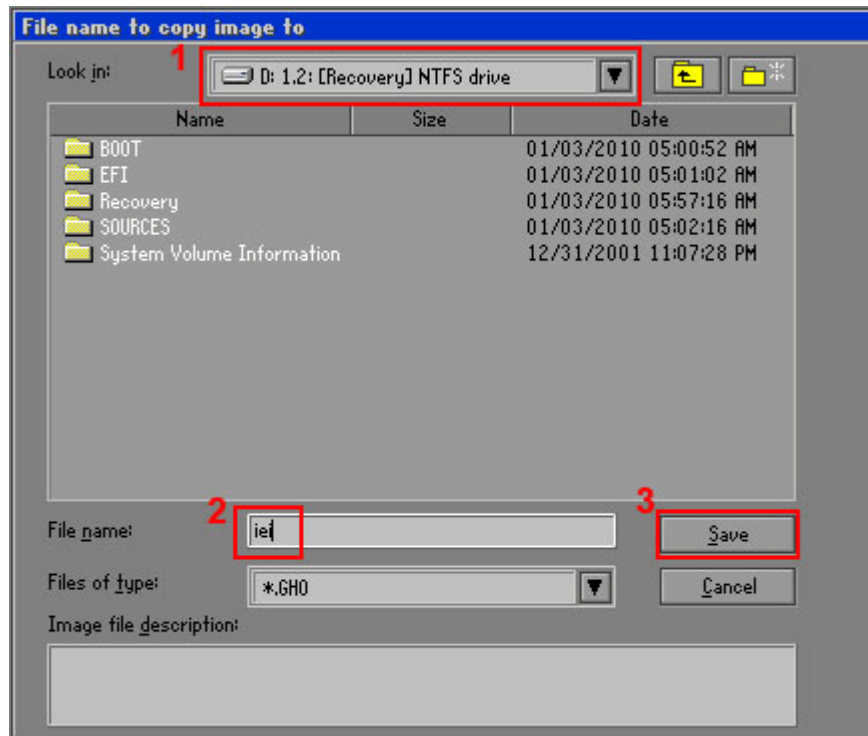


**Figure B-16: File Name to Copy Image to**

**Step 8:** When the Compress Image screen in **Figure B-17** prompts, click **High** to make the image file smaller.

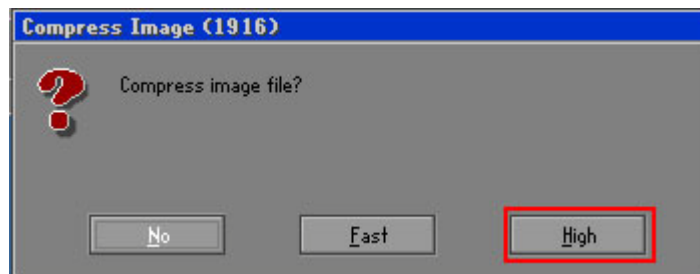


**Figure B-17: Compress Image**

**Step 9:** The Proceed with partition image creation window appears, click **Yes** to continue.

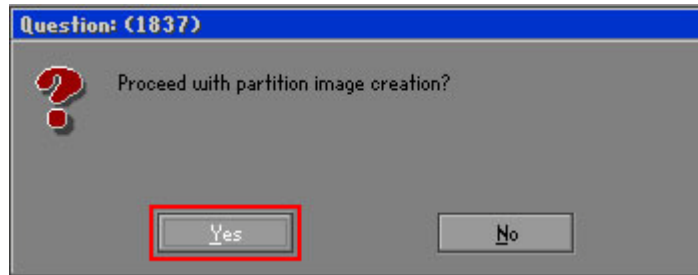

**Figure B-18: Image Creation Confirmation**

**Step 10:** The Symantec Ghost starts to create the factory default image (**Figure B-19**).

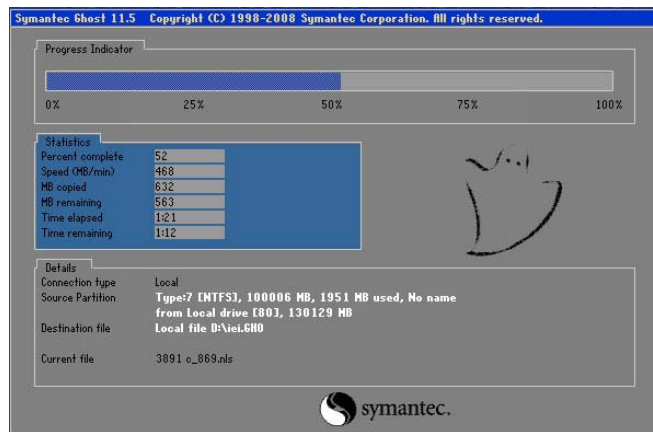

**Figure B-19: Image Creation Complete**


**Step 11:** When the image creation completes, a screen prompts as shown in **Figure B-20**.

Click **Continue** and close the Ghost window to exit the program.



**Figure B-20: Image Creation Complete**

**Step 12:** The recovery tool main menu window is shown as below. Press any key to reboot the system.

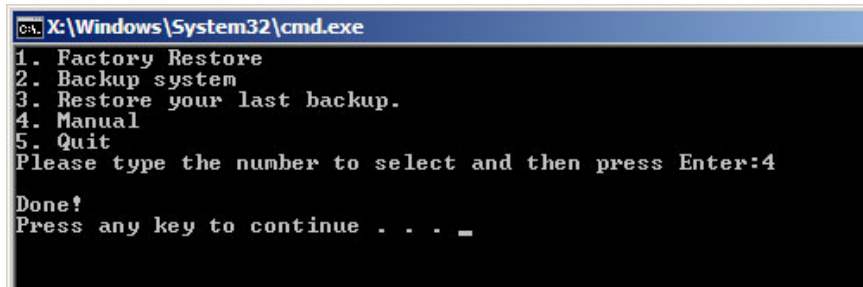

```
C:\Windows\System32\cmd.exe
1. Factory Restore
2. Backup system
3. Restore your last backup.
4. Manual
5. Quit
Please type the number to select and then press Enter:4
Done!
Press any key to continue . . . _
```

**Figure B-21: Press Any Key to Continue**

## B.3 Auto Recovery Setup Procedure

The auto recovery function allows a system to automatically restore from the factory default image after encountering a Blue Screen of Death (BSoD) or a hang for around 10 minutes. To use the auto recovery function, follow the steps described in the following sections.



### **CAUTION:**

The setup procedure may include a step to create a factory default image. It is suggested to configure the system to a factory default environment before the configuration, including driver and application installations.

---

**Step 1:** Follow the steps described in **Section B.2.1 ~ Section B.2.3** to setup BIOS, create partitions and install operating system.

**Step 2:** Install the auto recovery utility into the system by double clicking the **Utility/AUTORECOVERY-SETUP.exe** in the One Key Recovery CD. This utility **MUST** be installed in the system, otherwise, the system will automatically restore from the factory default image every ten (10) minutes.



Figure B-22: Auto Recovery Utility

**Step 3:** Reboot the system from the recovery CD. When prompted, press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient!



Figure B-23: Launching the Recovery Tool

**Step 4:** When the recovery tool setup menu appears, press <4> then <Enter>.


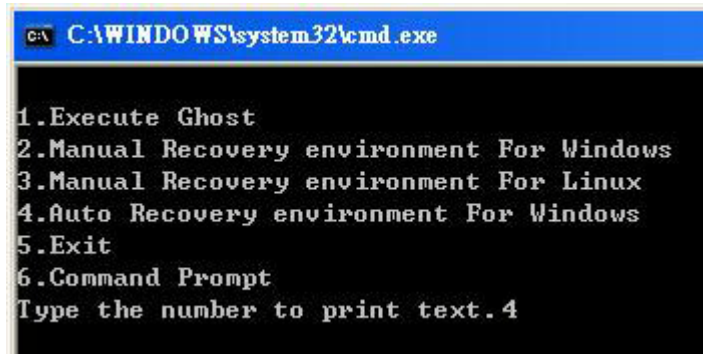


Figure B-24: Auto Recovery Environment for Windows

## UPC-V315-QM77 Panel PC

- Step 5:** The Symantec Ghost window appears and starts configuring the system to build an auto recovery partition. In this process the partition created for recovery files in **Section B.2.2** is hidden and the auto recovery tool is saved in this partition.

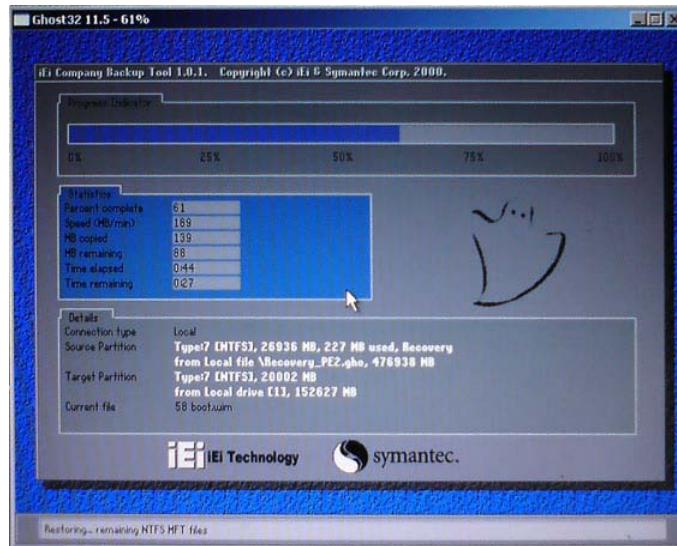


**Figure B-25: Building the Auto Recovery Partition**

- Step 6:** After completing the system configuration, the following message prompts to confirm whether to create a factory default image. Type **Y** to have the system create a factory default image automatically. Type **N** within 6 seconds to skip this process (The default option is YES). It is suggested to choose YES for this option.




**Figure B-26: Factory Default Image Confirmation**

**Step 7:** The Symantec Ghost starts to create the factory default image (**Figure B-27**).

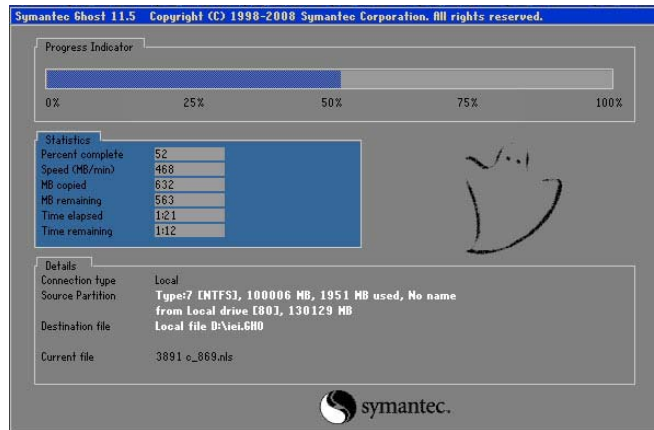

**Figure B-27: Image Creation Complete**

**Step 8:** After completing the system configuration, press any key in the following window to restart the system.

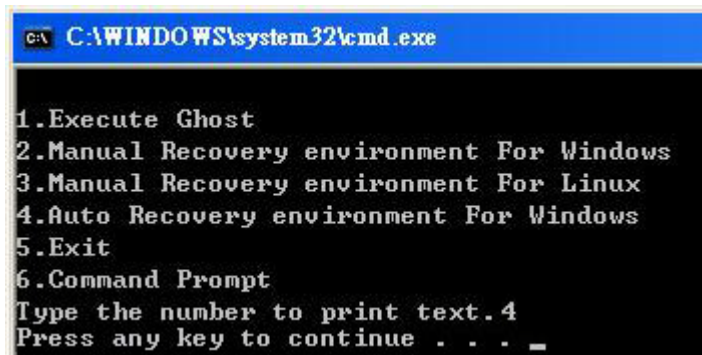


**Figure B-28: Press any key to continue**

**Step 9:** Eject the One Key Recovery CD and restart the system.

**Step 10:** Press the <DELETE> key as soon as the system is turned on to enter the BIOS.

**Step 11:** Enable the Auto Recovery Function option (**Advanced** → **iEi Feature** → **Auto Recovery Function**).

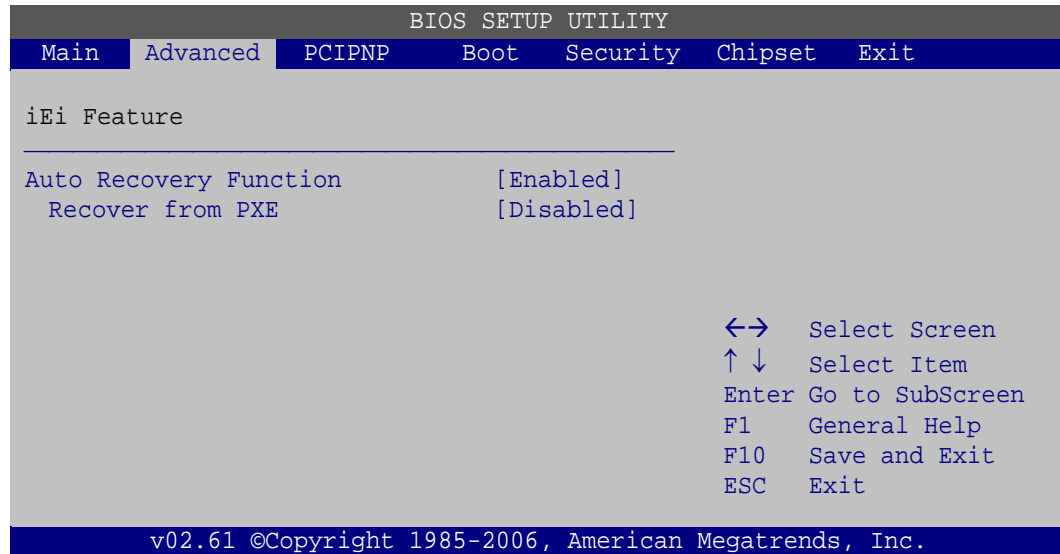

**BIOS Menu 25: IEI Feature**

**Step 12:** Save changes and restart the system. If the system encounters a Blue Screen of Death (BSoD) or a hang for around 10 minutes, it will automatically restore from the factory default image.



**CAUTION:**

The auto recovery function can only apply on a Microsoft Windows system running the following OS versions:

- Windows XP
- Windows Vista
- Windows 7

## B.4 Setup Procedure for Linux

The initial setup procedure for Linux system is mostly the same with the procedure for Microsoft Windows. Please follow the steps below to setup recovery tool for Linux OS.

**Step 1: Hardware and BIOS setup.** Refer to **Section B.2.1**.



**Step 2: Install Linux operating system.** Make sure to install GRUB (v0.97 or earlier) MBR type and Ext3 partition type. Leave enough space on the hard drive to create the recover partition later.



**NOTE:**

If the Linux OS is not installed with GRUB (v0.97 or earlier) and Ext3, the Symantec Ghost may not function properly.


While installing Linux OS, please create two partitions:

- Partition 1: /
- Partition 2: **SWAP**



**NOTE:**

Please reserve enough space for partition 3 for saving recovery images.

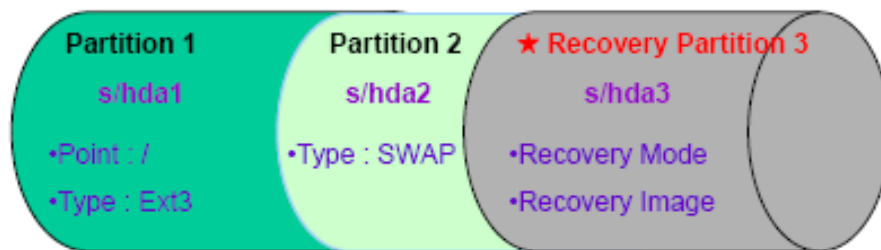


**Figure B-29: Partitions for Linux**

**Step 3: Create a recovery partition.** Insert the recovery CD into the optical disk drive. Follow **Step 1 ~ Step 3** described in **Section B.2.2**. Then type the following commands (marked in red) to create a partition for recovery images.

```
system32>diskpart
DISKPART>list vol
DISKPART>sel disk 0
```

```
DISKPART>create part pri size= ____  
DISKPART>assign letter=N  
DISKPART>exit  
system32>format N: /fs:ntfs /q /v:Recovery /y  
system32>exit
```

**Step 4:** Build the recovery partition. Press any key to boot from the recovery CD. It will take a while to launch the recovery tool. Please be patient. When the recovery tool setup menu appears, type <3> and press <Enter> (**Figure B-30**). The Symantec Ghost window appears and starts configuring the system to build a recovery partition. After completing the system configuration, press any key to reboot the system. Eject the recovery CD.

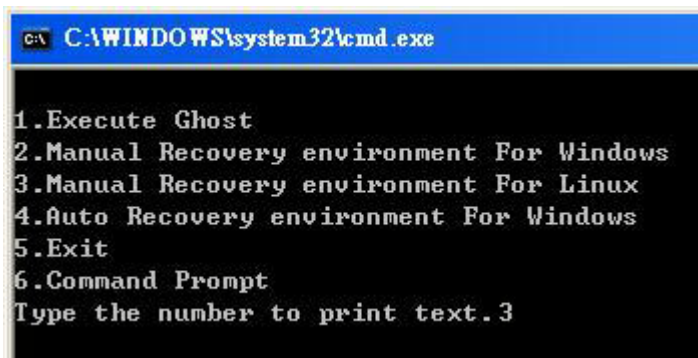

```
C:\WINDOWS\system32\cmd.exe  
1.Execute Ghost  
2.Manual Recovery environment For Windows  
3.Manual Recovery environment For Linux  
4.Auto Recovery environment For Windows  
5.Exit  
6.Command Prompt  
Type the number to print text.3
```

**Figure B-30: Manual Recovery Environment for Linux**

**Step 5:** Access the recovery tool main menu by modifying the “menu.lst”. To first access the recovery tool main menu, the menu.lst must be modified. In Linux, enter Administrator (root). When prompt appears, type:

```
cd /boot/grub  
vi menu.lst
```

```
Fedora release 9 (Sulphur)
Kernel 2.6.25-14.fc9.i686 on an i686 (tty2)

localhost login: root
Password:
[root@localhost ~]# cd /boot/grub/
[root@localhost grub]# vi menu.lst _
```

**Figure B-31: Access menu.lst in Linux (Text Mode)**

**Step 6:** Modify the menu.lst as shown below.

```
#boot=/dev/sda
default=0
timeout=10 ← Modify timeout=10
splashimage=(hd0,0)/grub/splash.xpm.gz
hiddenmenu
title Fedora (2.6.25-14.fc9.i686)
    root (hd0,0)
    kernel /vmlinuz-2.6.25-14.fc9.i686 ro root=UUID=10f1acda
    ac38b5c78910 rhgb quiet
    initrd /initrd-2.6.25-14.fc9.i686.img

title Recovery Partition
root (hd0,2)
makeactive ← Type command
chainloader +1
```

- **Type command:**  
**title Recovery Partition**  
**root (hd0,2)**  
**makeactive**  
**chainloader +1**

**Step 7:** The recovery tool menu appears. (**Figure B-32**)


```
1. Factory Restore
2. Backup system
3. Restore your last backup.
4. Manual
5. Quit
Please type the number to select and then press Enter:
```

**Figure B-32: Recovery Tool Menu**

**Step 8:** Create a factory default image. Follow **Step 2 ~ Step 12** described in **Section B.2.5** to create a factory default image.

## B.5 Recovery Tool Functions

After completing the initial setup procedures as described above, users can access the recovery tool by pressing <F3> while booting up the system. However, if the setup procedure in Section B.3 has been completed and the auto recovery function is enabled, the system will automatically restore from the factory default image without pressing the F3 key. The recovery tool main menu is shown below.

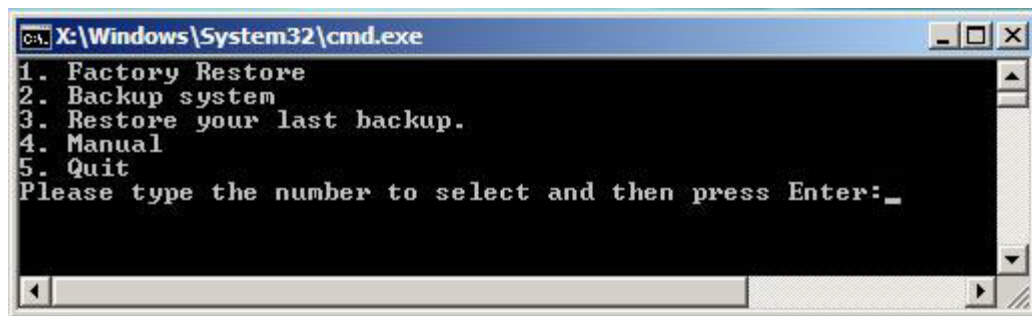

**Figure B-33: Recovery Tool Main Menu**

The recovery tool has several functions including:

1. **Factory Restore:** Restore the factory default image (iei.GHO) created in Section B.2.5.
2. **Backup system:** Create a system backup image (iei\_user.GHO) which will be saved in the hidden partition.
3. **Restore your last backup:** Restore the last system backup image
4. **Manual:** Enter the Symantec Ghost window to configure manually.
5. **Quit:** Exit the recovery tool and restart the system.



**WARNING:**

Please do not turn off the system power during the process of system recovery or backup.



**WARNING:**


All data in the system will be deleted during the system recovery. Please backup the system files before restoring the system (either Factory Restore or Restore Backup).

**B.5.1 Factory Restore**

To restore the factory default image, please follow the steps below.


**Step 1:** Type <1> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears and starts to restore the factory default. A factory default image called **iei.GHO** is created in the hidden Recovery partition.

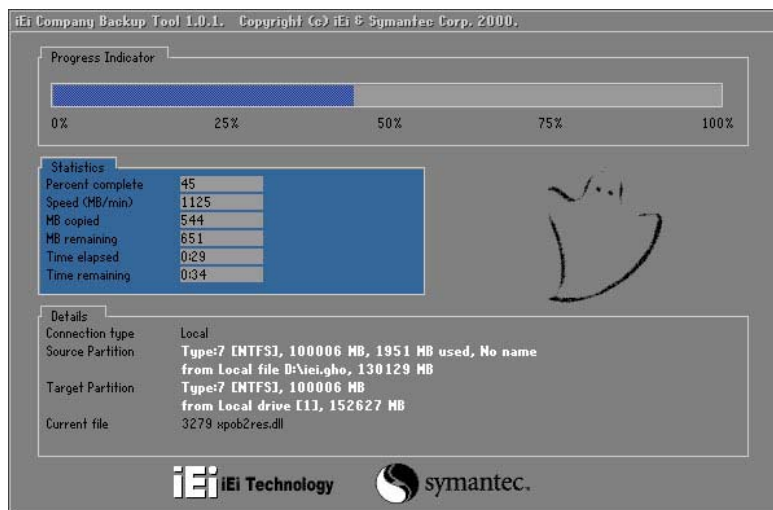

**Figure B-34: Restore Factory Default**

**Step 3:** The screen shown in **Figure B-35** appears when completed. Press any key to reboot the system.

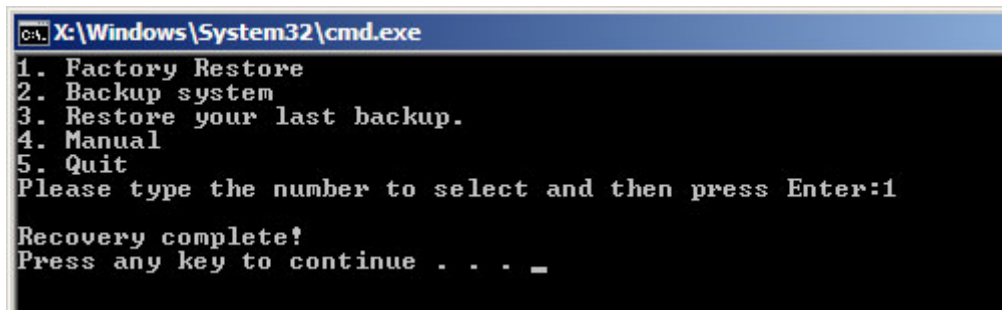


**Figure B-35: Recovery Complete Window**

## B.5.2 Backup System

To backup the system, please follow the steps below.

**Step 1:** Type <2> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears and starts to backup the system. A backup image called **iei\_user.GHO** is created in the hidden Recovery partition.

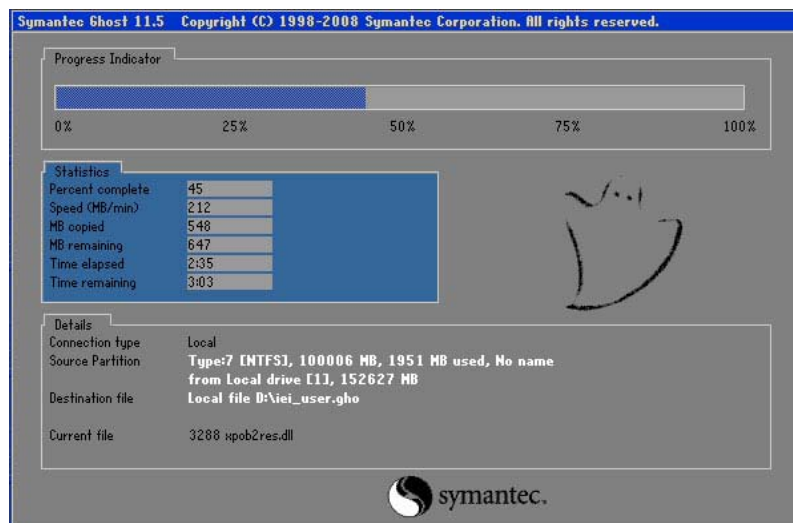

**Figure B-36: Backup System**

**Step 3:** The screen shown in **Figure B-37** appears when system backup is complete. Press any key to reboot the system.

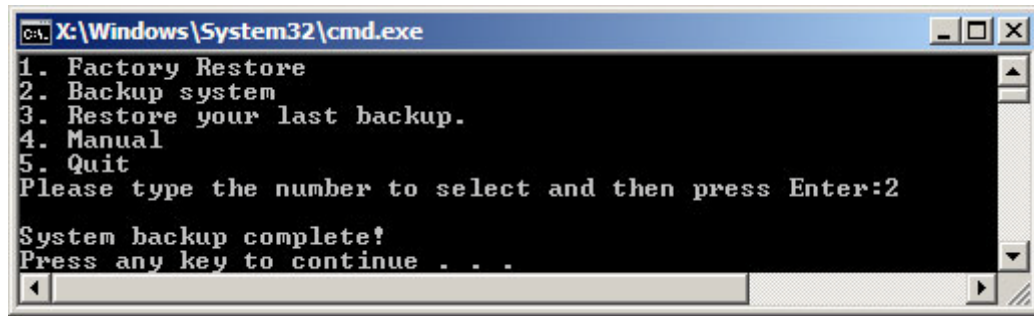


Figure B-37: System Backup Complete Window

### B.5.3 Restore Your Last Backup

To restore the last system backup, please follow the steps below.

**Step 1:** Type <3> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears and starts to restore the last backup image (iei\_user.GHO).


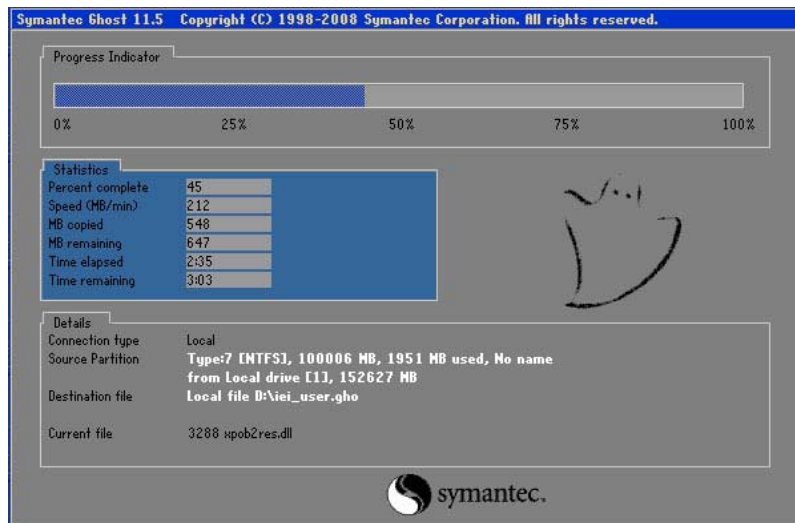


Figure B-38: Restore Backup

**Step 3:** The screen shown in **Figure B-39** appears when backup recovery is complete. Press any key to reboot the system.

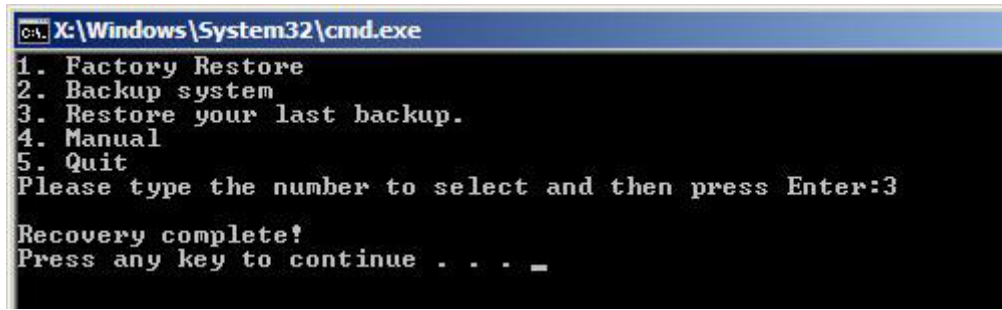


**Figure B-39: Restore System Backup Complete Window**

### B.5.4 Manual

To restore the last system backup, please follow the steps below.

**Step 1:** Type <4> and press <Enter> in the main menu.

**Step 2:** The Symantec Ghost window appears. Use the Ghost program to backup or recover the system manually.

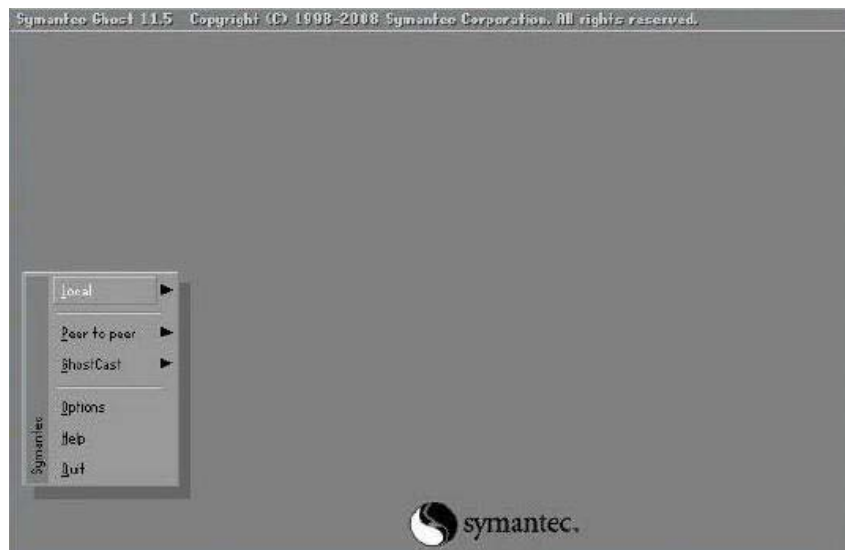


**Figure B-40: Symantec Ghost Window**

**Step 3:** When backup or recovery is completed, press any key to reboot the system.



## B.6 Restore Systems from a Linux Server through LAN

The One Key Recovery allows a client system to automatically restore to a factory default image saved in a Linux system (the server) through LAN connectivity after encountering a Blue Screen of Death (BSoD) or a hang for around 10 minutes. To be able to use this function, the client system and the Linux system MUST reside in the same domain.

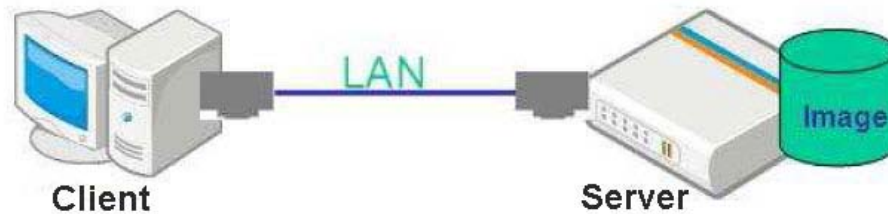

### NOTE:

The supported client OS includes:

- Windows 2000
- Windows XP
- Windows Vista
- Windows 7
- Windows CE
- Windows XP Embedded

Prior to restoring client systems from a Linux server, a few setup procedures are required.

**Step 1:** Configure DHCP server settings

**Step 2:** Configure TFTP settings

**Step 3:** Configure One Key Recovery server settings

**Step 4:** Start DHCP, TFTP and HTTP

**Step 5:** Create a shared directory

**Step 6:** Setup a client system for auto recovery

The detailed descriptions are described in the following sections. In this document, two types of Linux OS are used as examples to explain the configuration process – CentOS 5.5 (Kernel 2.6.18) and Debian 5.0.7 (Kernel 2.6.26).

## B.6.1 Configure DHCP Server Settings

**Step 1:** Install the DHCP

`#yum install dhcp` (CentOS, commands marked in red)

`#apt-get install dhcp3-server` (Debian, commands marked in blue)

**Step 2:** Confirm the operating system default settings: dhcpd.conf.

### CentOS

Use the following command to show the DHCP server sample location:

`#vi /etc/dhcpd.conf`

The DHCP server sample location is shown as below:

```
# DHCP Server Configuration file.
# see /usr/share/doc/dhcp*/dhcpd.conf.sample
#
```

Use the following command to copy the DHCP server sample to etc/dhcpd.conf:

`#cp /usr/share/doc/dhcp-3.0.5/dhcpd.conf.sample /etc/dhcpd.conf`

`#vi /etc/dhcpd.conf`

```
ddns-update-style interim;
ignore client-updates;

subnet 192.168.0.0 netmask 255.255.255.0 {
# --- default gateway
    option routers          192.168.0.2;
    option subnet-mask     255.255.255.0;

    option nis-domain      "domain.org";
    option domain-name     "domain.org";
    option domain-name-servers 192.168.0.1;
    next-server 192.168.0.6;
    filename "pxelinux.0";
    option time-offset     -18000; # Eastern Standard Time
    option ntp-servers     192.168.1.1;
}
```

### Debian

`#vi /etc/dhcpd.conf`

Edit “/etc/dhcpd.conf” for your environment. For example, add

`next-server PXE server IP address;`

filename "pxelinux.0";

```
ddns-update-style interim;
ignore client-updates;

subnet 192.168.0.0 netmask 255.255.255.0 {
# --- default gateway
    option routers                192.168.0.2;
    option subnet-mask            255.255.255.0;

    option nis-domain              "domain.org";
    option domain-name             "domain.org";
    option domain-name-servers    192.168.0.1;
    next-server 192.168.0.6;
    filename "pxelinux.0";
    option time-offset             -18000; # Eastern Standard Time
    option ntp-servers             192.168.1.1;
}
```

### B.6.2 Configure TFTP Settings

**Step 1:** Install the tftp, httpd and syslinux.

`#yum install tftp-server httpd syslinux` (CentOS)

`#apt-get install tftpd-hpa xinetd syslinux` (Debian)

**Step 2:** Enable the TFTP server by editing the "/etc/xinetd.d/tftp" file and make it use the remap file. The "-vvv" is optional but it could definitely help on getting more information while running the remap file. For example:

#### CentOS

`#vi /etc/xinetd.d/tftp`

Modify:

`disable = no`

`server_args = -s /tftpboot -m /tftpboot/tftpd.remap -vvv_`

```
socket_type      = dgram
protocol         = udp
wait            = yes
user            = root
server          = /usr/sbin/in.tftpd
server_args     = -s /tftpboot -m /tftpboot/tftpd.remap -vvv_
disable         = no
per_source      = 11
cps             = 100 2
flags           = IPv4
```

### Debian

Replace the TFTP settings from “inetd” to “xinetd” and annotate the “inetd” by adding “#”.

`#vi /etc/inetd.conf`

Modify: `#tftp dgram udp wait root /usr/sbin.....` (as shown below)

```
#:BOOT: TFTP service is provided primarily for booting. Most sites
#      run this only on machines acting as "boot servers."
#tftp  dgram  udp   wait  root  /usr/sbin/in.tftpd /usr/sbin/in.tftpd -s
#      /var/lib/tftpboot
```

`#vi /etc/xinetd.d/tftp`

```
socket_type      = dgram
protocol        = udp
wait            = yes
user            = root
server          = /usr/sbin/in.tftpd
server_args     = -s /tftpboot -m /tftpboot/tftpd.remap -vvv
disable         = no
per_source      = 11
cps             = 100 2
flags           = IPv4
```

### B.6.3 Configure One Key Recovery Server Settings

**Step 1:** Copy the **Utility/RECOVERYR10.TAR.BZ2** package from the One Key Recovery CD to the system (server side).



**Step 2:** Extract the recovery package to /.

```
#cp RecoveryR10.tar.bz2 /
#cd /
#tar -xvjf RecoveryR10.tar.bz2
```

**Step 3:** Copy “pxelinux.0” from “syslinux” and install to “tftpboot”.

```
#cp /usr/lib/syslinux/pxelinux.0 /tftpboot/
```

#### B.6.4 Start the DHCP, TFTP and HTTP

Start the DHCP, TFTP and HTTP. For example:

##### CentOS

```
#service xinetd restart
```

```
#service httpd restart
```

```
#service dhcpd restart
```

##### Debian

```
#/etc/init.d/xinetd reload
```

```
#/etc/init.d/xinetd restart
```

```
#/etc/init.d/dhcp3-server restart
```

#### B.6.5 Create Shared Directory

**Step 1:** Install the samba.

```
#yum install samba
```

**Step 2:** Create a shared directory for the factory default image.

```
#mkdir /share
```

```
#cd /share
```

```
#mkdir /image
```

```
#cp iei.gho /image
```



#### **WARNING:**

The file name of the factory default image must be **iei.gho**.

---

**Step 3:** Confirm the operating system default settings: smb.conf.

```
#vi /etc/samba/smb.conf
```

Modify:

[image]

```
comment = One Key Recovery
```

```
path = /share/image
```

```
browseable = yes
```

```
writable = yes
```

```
public = yes
```

```
create mask = 0644
```

```
directory mask = 0755
```

**Step 4:** Edit "/etc/samba/smb.conf" for your environment. For example:

```
# "security = user" is always a good idea. This will require a Unix account
# in this server for every user accessing the server. See
# /usr/share/doc/samba-doc/htmldocs/Samba3-HOWTO/ServerType.html
# in the samba-doc package for details.
security = share
```

```
[image]
comment = One Key Recovery
path = /share/image
browseable = yes
writable = yes
public = yes
create mask = 0644
directory mask = 0755
```

**Step 5:** Modify the hostname

```
#vi /etc/hostname
```

```
Modify: RecoveryServer
```

```
RecoveryServer
```

## B.6.6 Setup a Client System for Auto Recovery

**Step 1:** Configure the following BIOS options of the client system.

Advanced → iEi Feature → Auto Recovery Function → **Enabled**

Advanced → iEi Feature → Recover from PXE → **Enabled**

Boot → Launch PXE OpROM → **Enabled**

**Step 2:** Continue to configure the **Boot Option Priorities** BIOS option of the client system:

Boot Option #1 → remain the default setting to boot from the original OS.

Boot Option #2 → select the boot from LAN option.

**Step 3:** Save changes and exit BIOS menu.

Exit → **Save Changes and Exit**

**Step 4:** Install the auto recovery utility into the system by double clicking the **Utility/AUTORECOVERY-SETUP.exe** in the One Key Recovery CD. This utility **MUST** be installed in the system, otherwise, the system will automatically restore from the factory default image every ten (10) minutes.



**Step 5:** Restart the client system from LAN. If the system encounters a Blue Screen of Death (BSoD) or a hang for around 10 minutes, it will automatically restore from the factory default image. The following screens will show when the system starts auto recovering.

```
Realtek PCIe GBE Family Controller Series v2.35 (06/14/10)
CLIENT MAC ADDR: 00 18 7D 13 E6 89  GUID: 00020003-0004-0005-0006-0007000000
DHCP . ./
```


```

My IP address seems to be C0A80009 192.168.0.9
ip=192.168.0.9:192.168.0.8:192.168.0.2:255.255.255.0
TFTP prefix:
Trying to load: pxelinux.cfg/00020003-0004-0005-0006-000700080009
Trying to load: pxelinux.cfg/01-00-18-7d-13-e6-89
Trying to load: pxelinux.cfg/C0A80009
Trying to load: pxelinux.cfg/C0A8000
Trying to load: pxelinux.cfg/C0A800
Trying to load: pxelinux.cfg/C0A80
Trying to load: pxelinux.cfg/C0A8
Trying to load: pxelinux.cfg/C0A
Trying to load: pxelinux.cfg/C0
Trying to load: pxelinux.cfg/C
Trying to load: pxelinux.cfg/default
boot:
    
```

```

Windows is loading files...

IP: 192.168.0.8, File: \Boot\WinPE.wim
    
```

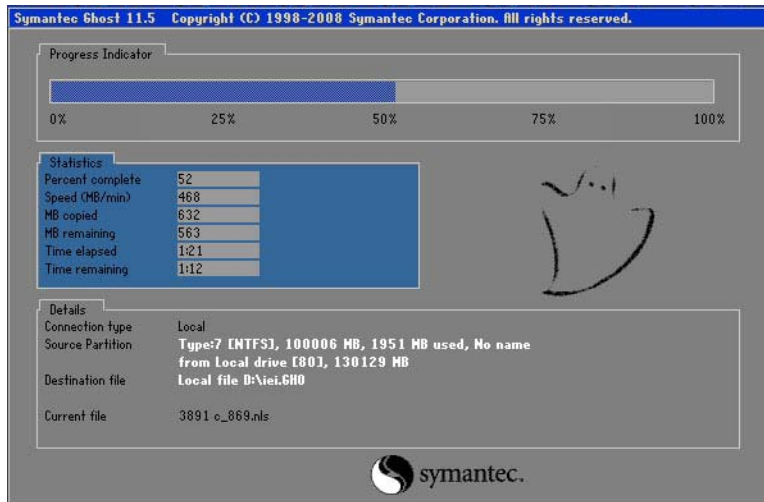

Symantec Ghost 11.5 Copyright (C) 1998-2008 Symantec Corporation. All rights reserved.

Progress Indicator: 50%

Statistics	
Percent complete	52
Speed (MB/min)	468
MB copied	632
MB remaining	563
Time elapsed	1:21
Time remaining	1:12

Handwritten mark: 2011

Details	
Connection type	Local
Source Partition	Type:7 [NTFS], 100006 MB, 1951 MB used, No name from Local drive [80], 130129 MB
Destination file	Local file D:\iei.GHO
Current file	3891_e_869.nls

symantec.



**NOTE:**

A firewall or a SELinux is not in use in the whole setup process. If there is a firewall or a SELinux protecting the system, modify the configuration information to accommodate them.




## B.7 Other Information


### B.7.1 Using AHCI Mode or ALi M5283 / VIA VT6421A Controller

When the system uses AHCI mode or some specific SATA controllers such as ALi M5283 or VIA VT6421A, the SATA RAID/AHCI driver must be installed before using one key recovery. Please follow the steps below to install the SATA RAID/AHCI driver.


- Step 1:** Copy the SATA RAID/AHCI driver to a floppy disk and insert the floppy disk into a USB floppy disk drive. The SATA RAID/AHCI driver must be especially designed for the on-board SATA controller.
- Step 2:** Connect the USB floppy disk drive to the system.
- Step 3:** Insert the One Key Recovery CD into the system and boot the system from the CD.
- Step 4:** When launching the recovery tool, press <F6>.

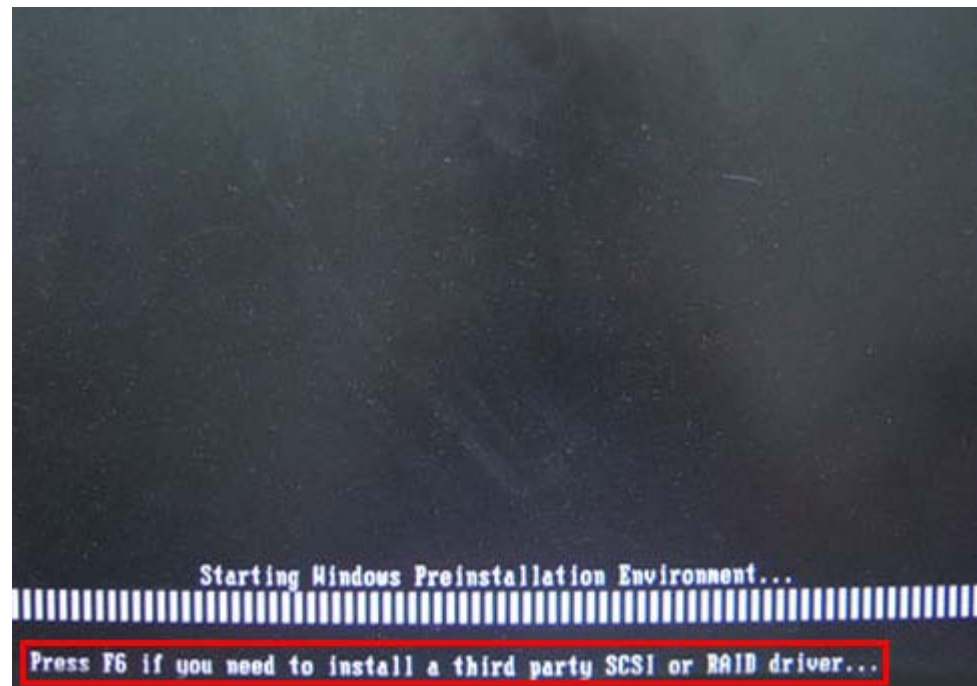

**Step 5:** When the following window appears, press <S> to select “Specify Additional Device”.

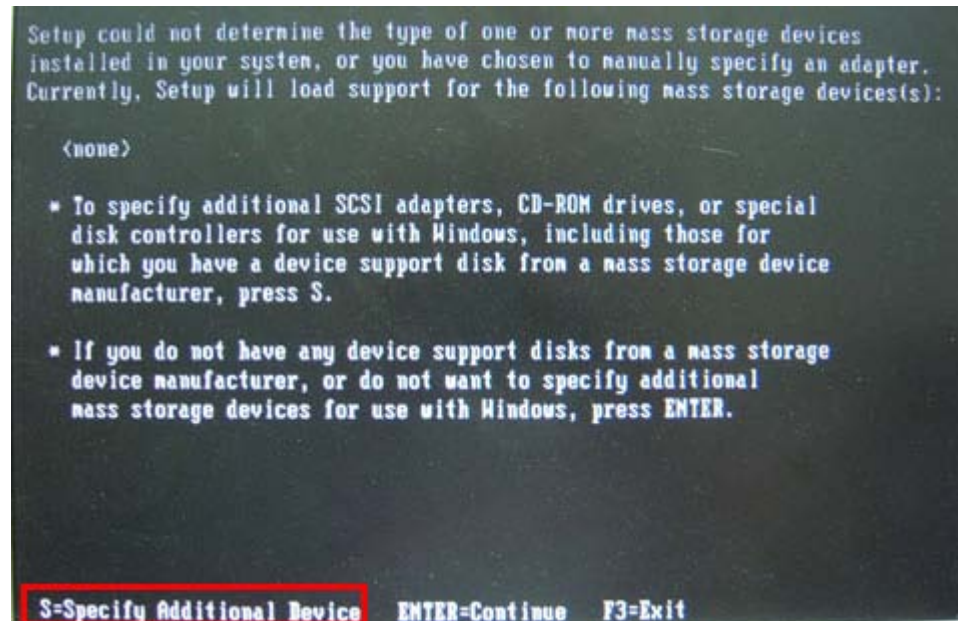

**Step 6:** In the following window, select a SATA controller mode used in the system. Then press <Enter>. The user can now start using the SATA HDD.

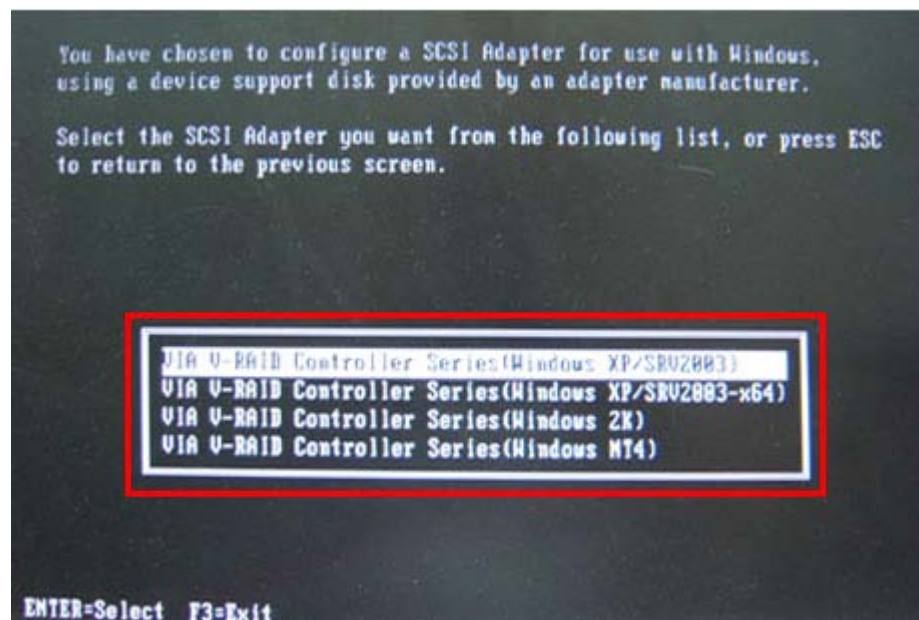

**Step 7:** After pressing <Enter>, the system will get into the recovery tool setup menu. Continue to follow the setup procedure from **Step 4** in **Section B.2.2 Create Partitions** to finish the whole setup process.

### B.7.2 System Memory Requirement

To be able to access the recovery tool by pressing <F3> while booting up the system, please make sure to have enough system memory. The minimum memory requirement is listed below.

- Using Award BIOS: 128 MB system memory
- Using AMI BIOS: 512 MB system memory.

Appendix

C

# Safety Precautions

---


**WARNING:**

The precautions outlined in this chapter should be strictly followed. Failure to follow these precautions may result in permanent damage to the EP series.

## C.1 Safety Precautions

Please follow the safety precautions outlined in the sections that follow:

### C.1.1 General Safety Precautions

Please ensure the following safety precautions are adhered to at all times.

- **Follow the electrostatic precautions** outlined below whenever the EP series is opened.
- **Make sure the power is turned off and the power cord is disconnected** whenever the EP series is being installed, moved or modified.
- **Do not apply voltage levels that exceed the specified voltage range.** Doing so may cause fire and/or an electrical shock.
- **Electric shocks can occur** if the EP series chassis is opened when the EP series is running.
- **Do not drop or insert any objects** into the ventilation openings of the EP series.
- **If considerable amounts of dust, water, or fluids enter the EP series**, turn off the power supply immediately, unplug the power cord, and contact the EP series vendor.
- **DO NOT:**
  - Drop the EP series against a hard surface.
  - Strike or exert excessive force onto the LCD panel.
  - Touch any of the LCD panels with a sharp object
  - In a site where the ambient temperature exceeds the rated temperature

### C.1.2 Anti-static Precautions

---



#### WARNING:

Failure to take ESD precautions during the installation of the EP series may result in permanent damage to the EP series and severe injury to the user.

---

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the EP series. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the EP series is opened and any of the electrical components are handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** Wearing a simple anti-static wristband can help to prevent ESD from damaging any electrical component.
- ***Self-grounding:*** Before handling any electrical component, touch any grounded conducting material. During the time the electrical component is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring or working with an electrical component, place it on an anti-static pad. This reduces the possibility of ESD damage.
- ***Only handle the edges of the electrical component:*** When handling the electrical component, hold the electrical component by its edges.

### C.1.3 Product Disposal

---




#### CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

---

- Outside the European Union - If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union:



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your display products, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

## C.2 Maintenance and Cleaning Precautions

When maintaining or cleaning the EP series, please follow the guidelines below.

### C.2.1 Maintenance and Cleaning

Prior to cleaning any part or component of the EP series, please read the details below.

- Except for the LCD panel, never spray or squirt liquids directly onto any other components. To clean the LCD panel, gently wipe it with a piece of soft dry cloth or a slightly moistened cloth.
- The interior of the EP series does not require cleaning. Keep fluids away from the EP series interior.
- Be cautious of all small removable components when vacuuming the EP series.
- Turn the EP series off before cleaning the EP series.
- Never drop any objects or liquids through the openings of the EP series.
- Be cautious of any possible allergic reactions to solvents or chemicals used when cleaning the EP series.
- Avoid eating, drinking and smoking within vicinity of the EP series.

### C.2.2 Cleaning Tools

Some components in the EP series may only be cleaned using a product specifically designed for the purpose. In such case, the product will be explicitly mentioned in the cleaning tips. Below is a list of items to use when cleaning the EP series.

- **Cloth** – Although paper towels or tissues can be used, a soft, clean piece of cloth is recommended when cleaning the EP series.
- **Water or rubbing alcohol** – A cloth moistened with water or rubbing alcohol can be used to clean the EP series.
- **Using solvents** – The use of solvents is not recommended when cleaning the EP series as they may damage the plastic parts.
- **Vacuum cleaner** – Using a vacuum specifically designed for computers is one of the best methods of cleaning the EP series. Dust and dirt can restrict the airflow in the EP series and cause its circuitry to corrode.
- **Cotton swabs** - Cotton swaps moistened with rubbing alcohol or water are excellent tools for wiping hard to reach areas.
- **Foam swabs** - Whenever possible, it is best to use lint free swabs such as foam swabs for cleaning.



Appendix

E

# Hazardous Materials Disclosure

---

## D.1 Hazardous Material Disclosure Table for IPB Products Certified as RoHS Compliant Under 2002/95/EC Without Mercury

The details provided in this appendix are to ensure that the product is compliant with the Peoples Republic of China (China) RoHS standards. The table below acknowledges the presences of small quantities of certain materials in the product, and is applicable to China RoHS only.

A label will be placed on each product to indicate the estimated “Environmentally Friendly Use Period” (EFUP). This is an estimate of the number of years that these substances would “not leak out or undergo abrupt change.” This product may contain replaceable sub-assemblies/components which have a shorter EFUP such as batteries and lamps. These components will be separately marked.

Please refer to the table on the next page.

Part Name	Toxic or Hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
Housing	X	O	O	O	O	X
Display	X	O	O	O	O	X
Printed Circuit Board	X	O	O	O	O	X
Metal Fasteners	X	O	O	O	O	O
Cable Assembly	X	O	O	O	O	X
Fan Assembly	X	O	O	O	O	X
Power Supply Assemblies	X	O	O	O	O	X
Battery	O	O	O	O	O	O
<p>O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in SJ/T11363-2006</p> <p>X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in SJ/T11363-2006</p>						

## UPC-V315-QM77 Panel PC

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	X	O	O	O	O	X
显示	X	O	O	O	O	X
印刷电路板	X	O	O	O	O	X
金属螺帽	X	O	O	O	O	O
电缆组装	X	O	O	O	O	X
风扇组装	X	O	O	O	O	X
电力供应组装	X	O	O	O	O	X
电池	O	O	O	O	O	O

O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。  
X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。

## UPC-V315 Screw Driver User manual



### NOTE:



Please use the screw driver that comes with the UPC-V315 to remove the screws on the chassis.

1. To install the SSD, remove the SSD drive bay access panel by removing the four retention screws



2. To install the 3G USB dongle, remove the internal USB port cover by removing the seven retention screws.



3. To install external peripheral devices, remove the I/O cover by removing the ten retention screws.

