

# TANK-860-HM86

- Intel® HM86 mobile solution
- Three different expansion slot options

## Features

- Intel® HM86 chipset + 4th generation Intel® Core™ CPU
- Great flexibility of expansion slots
  - » 2-slot model: 2 x PCIe by 16, 1 x PCIe Mini slot
  - » 4-slot model: 2 x PCIe by 16, 2 x PCI, 2 x PCIe Mini slot
  - » 6-slot model: 1 x PCIe by 16, 2 x PCIe by 4, 3 x PCI, 2 x PCIe Mini slot
- IPMI function for remote control management
- Three independent video outputs support high resolution
- 2 x 2.5" SATA HDD bay design fulfills high storage demand



2-slot



6-slot



4-slot

## Automation Solution

The TANK-860 is a fanless expandable embedded system with PCIe and/or PCI slots. With rich I/O, customers can make it as a control center. Furthermore, the ruggedized design make the TANK-860 more reliable even in harsh environments.

1

IEIMobile Solutions

Rich I/O

KICU I/O

2

Automation Panel Solutions

PCI/PCIe Expansion

KICU/CIE Expansion

3

Healthcare Panel PC Solution

Ruggedized System

KICU/CIE Expansion



Automation

VARIOUS

Machine Vision

WISCHUNG VISION

Data Acquisition

DATA ACQUISITION



## Dual 2.5" SATA HDD/SSD Bay

With two 2.5" SATA HDD/SSD bays, users can fulfill large storage requirement and use it as a terminal for data acquisition. The easy-to-assemble design reduces user fatigue in system installation.

4

Industrial System

2 x 2.5" SATA 6Gb/s HDD/SSD bay

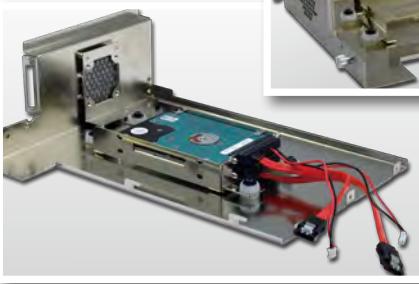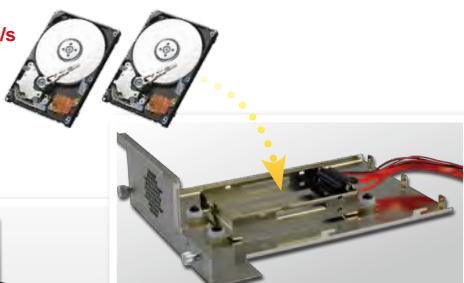

## Swappable CFast Design

CFast is based on the Serial ATA bus and supports up to 300 MBps transfer rates, which is much higher than the CF card. With the hot-swappable design, users can replace the CFast even when the system is running.


5

ORing Network Communication



## Abundant Expansion Interface

The TANK-860 series has a great variety of different expansion interfaces. From basic 2-slot expansion model to advanced 6-slot expansion model, customers can choose the most suitable one to apply.

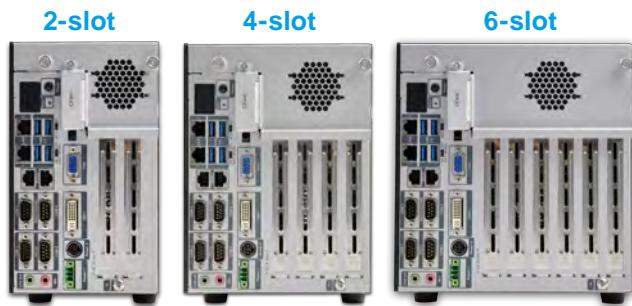

## Versatile Expansion Interface

	2-slot model	4-slot model		6-slot model		
Physical Slot	PCIe x16	PCIe x16	PCIe x16	PCIe x16	PCIe x4	PCIe x4
Signal	PCIe x8	PCIe x8	PCIe x8	PCIe x8	PCIe x4	PCIe x4
Slot type	PCIe x16	PCI	PCI	PCI	PCI	PCI
Signal	PCIe x8	PCI	PCI	PCI	PCI	PCI


## Wide Range Temperature

The TANK-860-HM86 series is designed to withstand wide range of temperatures. With this design, the TANK-860-HM86 series can even be installed in a high-temperature roadside cabinet.



## Dual DC Power Input

The TANK-860-HM86 adopts dual DC power input design, which ensures uninterrupted power supply to the system and eliminates the risk of sudden shutdown and data loss, even if one power is unavailable or low voltage capacity is present.

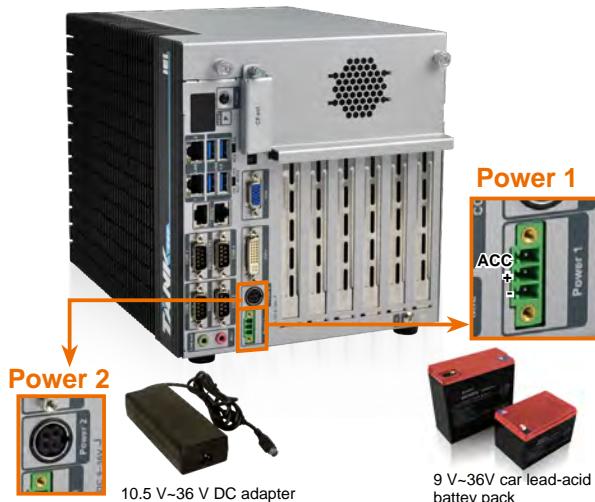

## iRIS Solution



IPMI 2.0 Compliant

By installing the IEI iRIS-2400 module, the TANK-860 is capable to complete your IoT application through the advanced remote control features, such as power management and control, remote KVM for device status monitoring, sending active alerts and warning messages by e-mail or SMS.

## Triple Display

The TANK-860 contains VGA/DisplayPort/DVI video outputs, which can be applied to multi-display application and support high Full HD video quality.



## Anti-Vibration and Anti-Shock Design

With the rugged design, the TANK-860-HM86 series is reliable in industrial environments to resist strong vibrations and can be used as a core computer required to be installed on moving objects.




## Wide Range DC Power Input

The TANK-860-HM86 series accepts wide range DC power input, allowing it to be powered anywhere, no matter if a 12 V/24 V DC source or a 19 V power adapter is available.



## Fully Integrated I/O

### Front View

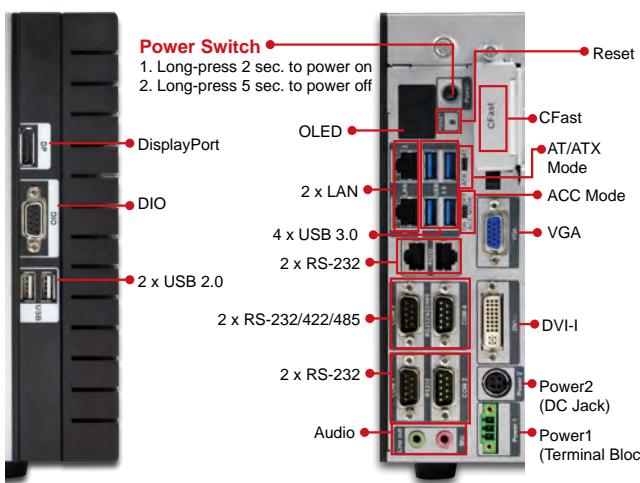

### Rear View

1  
IEIMobile Solutions

2  
Automation Panel Solutions

3  
Healthcare Panel PC Solution

4  
Industrial System

5  
ORing Network Communication




6  
Automation Control

7  
Optional Peripherals

## Specifications

Model Name	TANK-860-HM86
Chassis	<b>Color</b> Black C + Silver
	<b>Dimensions (WxHxD) (mm)</b> 2 slot: 121.5 x 255.2 x 205 4 slot: 154.8 x 255.2 x 205 6 slot: 195.4 x 255.2 x 205
	<b>System Fan</b> Fanless
	<b>Chassis Construction</b> Extruded aluminum alloys
Motherboard	<b>CPU</b> Intel® Core™ i5-4400E 2.7 GHz Intel® Celeron® 2000E 2.2 GHz
	<b>Chipset</b> Intel® HM86
	<b>System Memory</b> 2 x 204-pin DDR3 SO-DIMM, one 4GB pre-installed (system max: 16 GB)
IPMI	<b>iRIS Solution</b> 1 x iRIS-2400 (optional)
Storage	<b>Hard Drive</b> 2 x 2.5" SATA 6Gb/s HDD/SSD bay
	<b>CF Card/CFast</b> 1 x CFast
I/O Interfaces	<b>USB 3.0</b> 4
	<b>USB 2.0</b> 2
	<b>Ethernet</b> 2 x RJ-45 1 x PCIe GbE by Intel® I210 1 x PCIe GbE by Intel® I217LM
	<b>COM Port</b> 4 x RS-232 (2 DB-9 w/ isolation, 2 RJ-45) 2 x RS-232/422/485 (DB-9)
	<b>Digital I/O</b> 8-bit digital I/O, 4-bit input/4-bit output
	<b>Display</b> 1 x VGA, 1 x DVI-I, 1 x DisplayPort
	<b>Resolution</b> VGA: Up to 1920 x 1200 @60Hz DVI-I: Up to 2500 x 1600 @60Hz DisplayPort: Up to 2500 x 1600 @60Hz
	<b>Audio</b> 1 x Line-out, 1 x Mic-in
	<b>Wireless</b> 1 x 802.11b/g/n (optional)
	<b>PCI/PCIe</b> 2 A: Two PCIe x8 (physical PCIe x16 slot) 4 A: Two PCIe x8 (physical PCIe x16 slot) + 2 x PCI 6 A: One PCIe x8 (physical PCIe x16 slot) + two PCIe x4 + three PCI
Expansions	<b>PCIe Mini</b> 2A: 1 x Full-size (supports mSATA, colay with SATA) 4A: 1 x Full-size (supports mSATA, colay with SATA) + 1 x Full-size (on backplane) 6A: 1 x Full-size (supports mSATA, colay with SATA) + 1 x Full-size (on backplane)
	<b>Power Input</b> DC Jack: 9 V~36 V DC Terminal Block: 9 V~36 V DC
Power	<b>Power Consumption</b> 19 V@3.34 A (Intel® Core™ i5-4400E with 4 GB memory)
Reliability	<b>Mounting</b> Wall mount
	<b>Operating Temperature</b> -20°C ~ 60°C with air flow (SSD), 5% ~ 95%, non-condensing
	<b>Storage Temperature</b> -30°C ~ 70°C with air flow (SSD), 5% ~ 90%, non-condensing
	<b>Operating Shock</b> Half-sine wave shock 5G, 11ms, 3 shocks per axis
	<b>Operating Vibration</b> MIL-STD-810F 514.5C-2 (with SSD)
	<b>Weight (Net/Gross)</b> 2-slot: 4.2 kg/6.3 kg 4-slot: 4.5 kg/6.5 kg 6-slot: 4.8 kg/6.9 kg
	<b>Safety/EMC</b> CE/FCC
OS	<b>Supported OS</b> Microsoft® Windows® 8 Embedded, Microsoft® Windows® Embedded Standard 7 E

## Dimensions (Unit: mm)

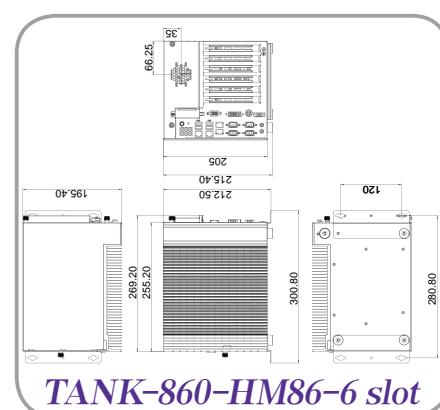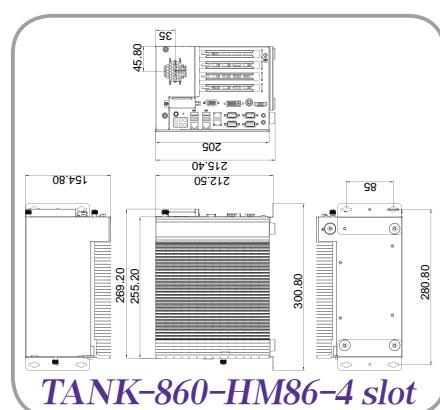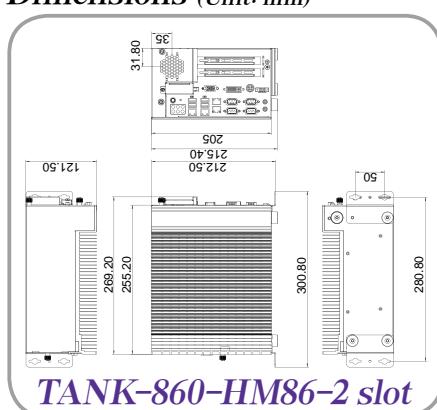

## Ordering Information

Part No.	Description
<b>TANK-860-HM86i-i5/4G/2A-R10</b>	Intel® Core™ i5-4400E 2.7 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 2 x PCIe expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-HM86i-i5/4G/4A-R10</b>	Intel® Core™ i5-4400E 2.7 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 2 x PCIe and 2 x PCI expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-HM86i-i5/4G/6A-R10</b>	Intel® Core™ i5-4400E 2.7 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 3 x PCIe and 3 x PCI expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-HM86i-C/4G/2A-R10</b>	Intel® Celeron® 2000E 2.2 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 2 x PCIe expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-HM86i-C/4G/4A-R10</b>	Intel® Celeron® 2000E 2.2 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 2 x PCIe and 2 x PCI expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-HM86i-C/4G/6A-R10</b>	Intel® Celeron® 2000E 2.2 GHz dual-core, TDP 37W, 4GB DDR3 pre-installed memory, 3 x PCIe and 3 x PCI expansion, VGA/DVI-I/DisplayPort, iRIS-2400 optional, 9 V~36 V DC, R10, RoHS
<b>TANK-860-QGW-i5/8G/2A-R10</b>	Intel® Core™ i5-4400E CPU, 2 x 4GB DDR3 memory, 2 x PCIe expansion, Dual GbE, COM, DIO, VGA/DVI-I/DisplayPort, iRIS-2400 optional, with QTS-Gateway, 9 V~36 V DC, RoHS
<b>TANK-860-QGW-i5/8G/4A-R10</b>	Intel® Core™ i5-4400E CPU, 2 x 4GB DDR3 memory, 2 x PCIe and 2 x PCI expansion, Dual GbE, COM, DIO, VGA/DVI-I/DisplayPort, iRIS-2400 optional, with QTS-Gateway, 9 V~36 V DC, RoHS
<b>TANK-860-QGW-i5/8G/6A-R10</b>	Intel® Core™ i5-4400E CPU, 2 x 4GB DDR3 memory, 3 x PCIe and 3 x PCI expansion, Dual GbE, COM, DIO, VGA/DVI-I/DisplayPort, iRIS-2400 optional, with QTS-Gateway, 9 V~36 V DC, RoHS

## Options

Part No.	Description
<b>32702-000400-200-RS</b>	European power cord
<b>63040-010120-210-RS</b>	Power adapter, FSP120-ABBN2, 9NA1205302, Active PFC, Vin:90~264VAC, 120W, plug=6.5mm, cable=1500mm, Erp (no load 0.15W), Vout:19VDC, 4-pin DIN with lock, CCL, RoHS
<b>19Z00-000605-00-RS</b>	Fan, +12V DC, 4-pin, 40 mm x 40 mm x10 mm, 6500RPM, RoHS
<b>iRIS-2400-R10</b>	IPMI 2.0 adapter card with AST2400 BMC chip for DDR3 SO-DIMM socket interface
<b>EMB-WIFI-KIT01-R11</b>	1T1R Wi-Fi module kit for embedded system, IEEE802.11b/g/n, 1 x Wi-Fi module, 2 x RF cable, 2 x Antenna, RoHS
<b>TANK-860-HM86-WES7E-R10</b>	OS Image with Windows® Embedded Standard 7 E for TANK-860 H Series, with CD-ROM, RoHS

## Packing List

1 x Utility CD	1 x Chassis Screw
1 x One Key Recovery CD	1 x Mounting Bracket