


共1张:1-1

成品图

ASSIGNMENT		
P1	颜色	P2
3	白	1
2	绿	2
1	红	3
4	黑	4
外壳	编织	

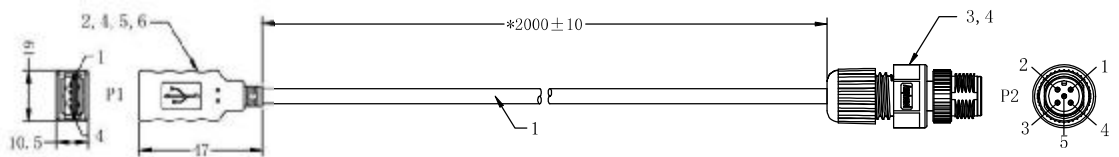

内模: YV-0073
外模: YV-0074

Bill Of Materials

NO.	零件编码	品名	描述	用量		供应商	备注
				长度(mm)/重量(g)	数量		
1	WH725000	CABLE	UL2725+28*1P-#24*2C-AL-B-D 外板:黑 OD=4.5	2055*(12*2)*(12*2)	1	松普	
2	CUSB0018	USB	USB A/F 白 镀金(外包装壳)		1	正耀	
3	CONN0650	CONNECTOR	安费诺 12-05BMM-SL8001 (M12 5PIN 公头 组装式 防水IP68)		1	安费诺	
4	PA015110	TUBE	Φ1.5 BLACK 300V	10	2	长圆	
5	PPE00001	PE	LD-PE	6	1	特	
6	PVC00006	PVC	PVC 45P 黑(插头料)	15	1	汉江	
7	BC001003	PE BAG	PE袋 L420*W350*H.04mm		A/RPCS		
8	BD000002	CARTON	纸箱 L330*W250*H250mm		A/RPCS		

注:1. 环境要求: 需符合橙裕《有害物质管制程序》。
2. 图上带*为为重点控制尺寸。
3. Materials are RoHS compliance.
4. 测试条件: 电压300V, 绝缘阻抗20MΩ, 导通阻抗30, 测试时间0.01S.

X.±1.0	X'±	APPROVED:	CUSTOMER: W Q D	 上海橙裕电子 SHANGHAI YINGYU ELECTRONIC CO.,LTD.		
.X±0.2	.X'±	CHECKED:	DESCRIPTION: WIRE ASS'Y			
.XX±0.1	.XX'±	ENGINEER:	P/N: 32001-022700-100-RS			
.XXX±	.XXX'±	DRAWING: 崔伟	Y. Y. P/N: WD-3778			
			REV	UNIT	客户版本:	 晨祥电子 SUNSHINE TECHNOLOGY CO.,LTD.
			1	m/m	DATE: 2017-02-09	

REV	DESCRIPTION	DATE
REVISIONS		

WH725000-SP UL2725#28*1P+#24*2C+AL+B+D 外被黑 OD=4.5



SUNF PU TECHNOLOGY (SUZHOU) CO., LTD



SPECIFICATION:		7/0.127x1P+7/0.20x2C-NEB		UL2725	CONSTRUCTION D.W.G
ITEM		SPECIFICATION			
CONDUCTOR	AWG	28AWG	24AWG		
	MATERIAL	TINNED COPPER	TINNED COPPER		
	COND SIZE	7/0.127±0.008mm	7/0.20±0.008mm		
INSULATION	MIN. AVG. THICK	0.23mm	0.24mm		
	MATERIAL	PE	SR-PVC		
	OD	0.85±0.05mm	1.10±0.05mm		
	NO.	1P	2C		
AL. MYLAR (FACE OUTSIDE)	COVERAGE	100%			
	OVERLAP	25MMIN			
DRAIN	AWG	24AWG			
	MATERIAL	TINNED COPPER			
	SIZE	7/0.20±0.008mm			
BRAID SHIELD	MATERIAL	TINNED COPPER			
	SIZE	16/5/0.10±0.008mm			
	COVERAGE	65MMIN			
JACKET	MIN. AVG. THICK	0.65mm			
	MATERIAL	PVC			
	COLOUR	As Per Customer			
	OD	4.50±0.15mm			
ELECTRICAL CHARACTERISTICS 1. Rating Test: 75MP 80°C VOLTAGE 30V 2. Conductor Resistance: at 20°C 28AWG: 237Ω/KM MAX 24AWG: 93Ω/KM MAX					MARKING AW E89680-D SUNF PU STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C CSA LL54151-D AWG I/II A/B 80°C 150V FT1 USB 2.0 CABLE TID 60000103 所有颜色需与我司样品一致 REMARK
PHYSICAL PROPERTIES OF JACKET 1. Tensile strength of jacket: Unaged: 1.05kg/cm ² Aged: 70MMIN 2. Elongation of jacket: Unaged: 100MMIN Aged: 65MMIN 3. Accord with ROHSASONY 00259					
SHEET NO.		00196-C	PART NO.		
APPROVED		SY.L 4/30	CUSTOMER		
CHECKED			REV.		
DRAWING		nanianling 434	DATE 2008/06/30		

W107-B02-F062-01

