


共1张:1-1

### 成品图

ASSIGNMENT			
P1	颜色	P2	P3
1	白		2
2	红		1
3	红	1	
4	白	2	
5	缠绕	3	3
	缠绕		

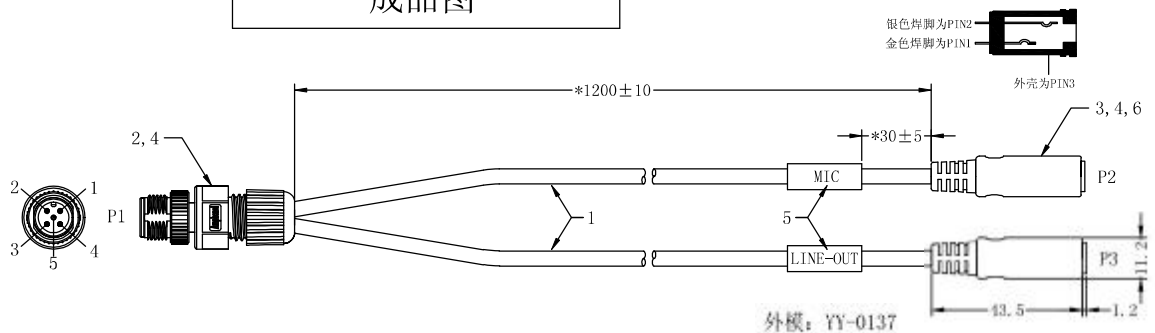

### Bill Of Materials

NO.	零件编码	品名	描述	用量		供应商	备注
				长度(mm)/重量(g)	数量		
1	VH547006	CABLE	UL2547#28*2C-S 内芯:红,白 外被:灰 OD=2.8MM	1255*(12*2)*(12*2)	2	新亚	
2	CONN0650	CONNECTOR	安费诺 12-05BMM-A-SL8001 (M12 5PIN 公头 组袋式 防水IP68)		1	安费诺	
3	PV000047	JACK	DC JACK 3.5三极耳机母座 焊接成型式		2	卓勤	
4	PA01S110	TUBE	Φ1.5 BLACK 300V	10	3	长圆	
5	PA0030B1	TUBE	Φ3.0 WHITE 600V 分别印字"MIC" "LINE-OUT"	18	2	长圆	
6	PVC00006	PVC	PVC 45P 黑(插头料)	10	2	汉江	
7	BC001003	PE BAG	PE袋 L120*W350*H.04mm		A/RPCS		
8	BD000002	CARTON	纸箱 L330*W260*H250mm		A/RPCS		

- 注:1. 环境要求: 需符合福裕《有害物质管制程序》.
- 2. 图上带"\*"符号为重点控制尺寸.
- 3. Materials are RoHS compliance.
- 4. 测试条件: 电压300V, 绝缘阻抗20MΩ, 导通阻抗30, 测试时间0.01S.

X.±1.0	X'±	APPROVED:	CUSTOMER: W Q D
.X±0.2	.X'±	CHECKED:	DESCRIPTION: WIRE ASS'Y
.XX±0.1	.XX'±	ENGINEER:	P/N: 32007-005400-100-RS
.XXX±	.XXX'±	DRAWING: 崔伟	Y. Y. P/N: WD-3779
			REV UNIT 客户版本:
			1 m/m DATE: 2017-02-09

上海懿裕电子  
SHANGHAI YINGYU  
ELECTRONIC  
CO.,LTD

晟祥电子  
SUNSHINE TECHNOLOGY CO.,LTD

REV	DESCRIPTION	DATE
REVISIONS		



**XINYA ELECTRONIC CO.,LTD**

TEL:86-0577-62866888 FAX:86-0577-62865999

<http://www.xinya-cn.com>

核准 APPROVED	审核 CHECKED	制作 DRAWING
石留建	周汉章	潘文欢

## 规格承认书 *Product Specifications*

规格SPECIFICATION:		UL2547 28#TS~24#TS/2C+S,UL2547 28#TS~24#TS/3C+S							
项目ITEM		规格 SPECIFICATION							
导体 CONDUCTOR	线规AWG	28/2C	28/3C	26/2C	26/3C	24/2C	24/3C	/	/
	材质MATERIAL	镀锡铜 TINNED COPPER							
	尺寸COND.SIZE	7/0.127±0.008		7/0.160±0.009		7/0.200±0.009		/	/
绝缘 INSULATION	标称厚度 Nominal Thickness	0.23mm							
	最小厚度 Min. Thickness	0.18mm							
	材质MATERIAL	半硬质聚氯乙烯 SR-PVC							
	OD外径	0.90±0.05		1.00±0.05		1.10±0.05		/	/
	颜色COLOUR	任意Optional							
缠绕Spiral	材质MATERIAL	镀锡铜 TINNED COPPER							
	尺寸SIZE	50±3/0.10 ±0.008	56±4/0.10 ±0.008	58±4/0.10 ±0.008	52±4/0.12 ±0.008	53±4/0.12 ±0.008	57±4/0.12 ±0.008	/	/
护套COVERING	标称厚度 Nominal Thickness	0.30mm							
	最小厚度 Min. Thickness	0.25mm							
	材质MATERIAL	聚氯乙烯 PVC							
	OD外径	2.80±0.10	3.00±0.10	3.00±0.10	3.20±0.15	3.30±0.15	3.45±0.15	/	/
	颜色COLOUR	任意Optional							
Conductor Resistance: Max(Ω/Km,20℃)		239		150		94.2		/	/
印字 MARKING		AWM 2547 E170689 VW-1 80℃ 300V xxAWG XINYA CSA AWM I A LL109915 FT1 80℃ 300V xxAWG -F- LM							
电气性能ELECTRICAL CHARACTERISTICS				物理性能PHYSICAL CHARACTERISTICS					
1. 额定值Rating: 温度TEMP 80℃; 电压VOLTAGE 300V 2. 浸水耐压Dielectric-Withstand Test:2000V 3. 火花电压Spark Test:3000V				1. 抗张强度Tensile Strength: 1.05kgf/mm <sup>2</sup> 2. 伸长率Elongation: Unaged: 100% min 3. 热冲击Heat shock test: 不开裂NO CRACKING 4. 冷弯Cold bend test: 不开裂NO CRACKING 5. 加热变形Deformation test: MAX 50% 6. 燃烧测试Flame test: PASS VW-1					
剖面图Cross - Sectional View :									
备注 REMARK									
图号 PART NO.	SP1108147			客户承认 APPROVED BY					