

# BRICK Series

Embedded Chassis for IEI DC input Mini-ITX/EPIC/3.5" SBC



▼ BRICK Chassis with WAFER-AL (SBC not included)

▲ BRICK Chassis with eKINO-BT (SBC not included)

## Features


- Designed for Mini-ITX / EPIC / 3.5" SBC with DC input
- Flexible SBC compatibility
- One 2.5" hard drive capacity
- Cost-effective, RoHS compliant design

## Specifications

Model Name		BRICK-KINO	BRICK-WAFER	BRICK-NANO
Platform		Case only		
Chassis	Color	Black		
	Dimensions (WxDxH) (mm)	203 x 178 x 64	220 x 143 x 55	220 x 143 x 55
Motherboard	Motherboard Model	tKINO-ULT3 KINO-DAL KINO-DBT tKINO-AL tKINO-BW eKINO-BT	WAFER-AL WAFER-BT	NANO-AL NANO-BT
	SBC Size (mm)	Mini-ITX (170 x 170)	3.5" (146 x 102)	3.5" (165 x 115)
Buttons		Power switch		
Reliability	Operating Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C
	Weight (Net/Gross)	1.25kg/1.5kg	1.2kg/1.5kg	1.2kg/1.5kg

## BRICK-NANO/WAFER Dimensions (Unit: mm)

## BRICK-KINO Dimensions (Unit: mm)

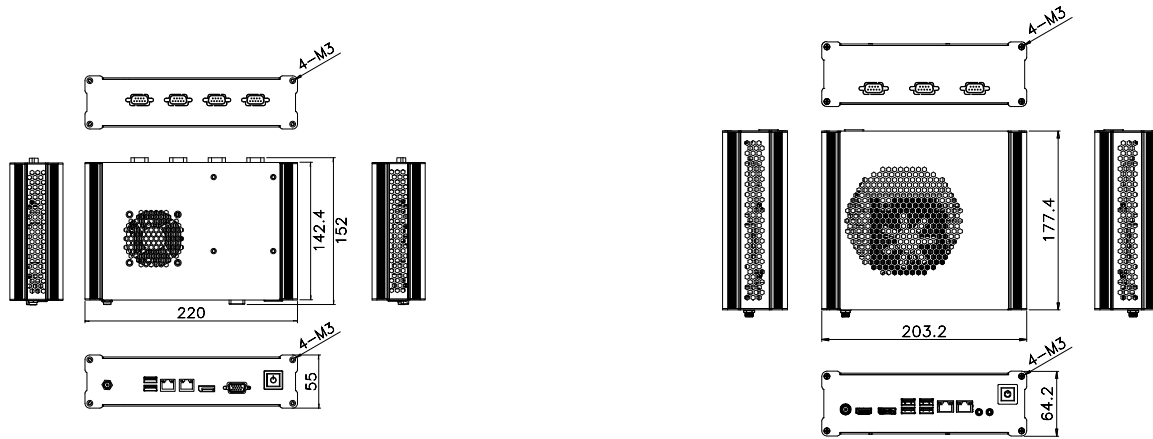

## Ordering Information

Part No.	Description
BRICK-KINO-DAL-R10	Embedded chassis for KINO-DAL SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-KINO-DBT-R10	Embedded chassis for KINO-DBT SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-eKINO-BT-R10	Embedded chassis for eKINO-BT SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-tKINO-AL-R10	Embedded chassis for tKINO-AL SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-tKINO-BW-R10	Embedded chassis for tKINO-BW SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-tKINO-ULT3-R10	Embedded chassis for tKINO-ULT3 SBC, with IO bracket ,power switch, mat black and RoHS
BRICK-WAFER-AL-R10	Embedded chassis for WAFER-AL SBC, with SATA cable, IO bracket ,power switch, DC input cable, mat black and RoHS
BRICK-WAFER-BT-R10	Embedded chassis for WAFER-BT SBC, with SATA cable, IO bracket ,power switch, DC input cable, mat black and RoHS
BRICK-NANO-AL-R10	Embedded chassis for NANO-AL SBC, with SATA cable, IO bracket ,power switch, DC input cable, mat black and RoHS
BRICK-NANO-BT-R10	Embedded chassis for NANO-BT SBC, with SATA cable, IO bracket ,power switch, DC input cable, mat black and RoHS

## Packing List

BRICK-KINO	1 x BRICK Chassis	1 x Power switch cable	1 x Screw set	1 x QIG	
BRICK-WAFER/NANO	1 x BRICK Chassis	1 x Power switch cable	1 x Screw set	1 x QIG	1 x SATA cable