



PART	INNER MOLD NO.	OUTER MOLD NO.
P1	ST 030	ST 031

# CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		NEW	08/10/2018	JOHNSON
AX2		變更-1長度L=500MM	08/23/2018	JOHNSON
AX3		修正P2接頭為護套式 & 包裝改為單條包裝	08/24/2018	JOHNSON
A		MASS PRODUCTION	08/28/2018	JOHNSON

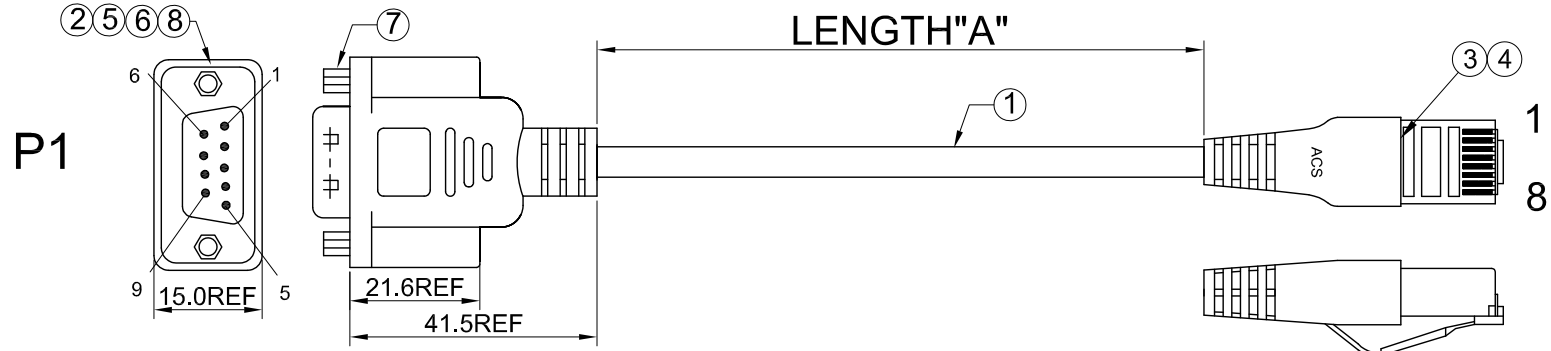

**D-SUB 9P MALE(公頭/後鉚螺母)**  
再鎖2支六角螺母, 客戶組裝時可拆鎖.

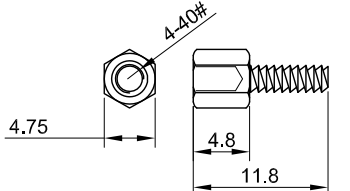


⑦ **HEX SCREW 4-40#**

## NOTED.

TC&C PART NO.	LENGTH "A"
T106064081806-1	500±20mm

**PACKAGE :**  
每1PC產品鎖上螺絲如下圖裝入PE袋.



P1		P2	
1	NC	NC	
2	6	6	WHITE/BLUE(白/藍)
3	3	3	BLUE(藍)
4	2	2	WHITE/ORANGE(白/橙)
5	4	4	ORANGE(橙)
5	5	5	WHITE/GREEN(白/綠)
6	7	7	GREEN(綠)
7	1	1	WHITE/BROWN(白/棕)
8	8	8	BROWN(棕)
9	NC	NC	
shell	shell	shell	GND(地)

**WIRING TABLE**

ITEM	PART NUMBER	DESCRIPTION	Q'TY	REMARK
8	T73210080000V10	H.S,TUBE OD:0.8	A/R	
7	T820001041070Z6	SCREW 六角螺母 4-40# 4.75*11.8	2PCS	
6	T70021006060101	LDPE 0405 JAPAN NUC 低密度 耐溫 120度	G	
5	T70011102060106	35P PVC FOR OVERMOLD BEIGE	G	
4	T73601010000101	BOOT HOOD,35P PVC BLACK水晶頭護套 REACH73+ROHS	G	
3	T506400188140F0	8P8C PLUG STP 30U 銅殼,24#多股,刺破式	1PC	
2	T502712209231GI	D-SUB 9P/M BLACK G/F 通孔 後鉚螺母	1PC	
1	T60-4430824A03	STP CAT 5E 24AWG 4P+ADM OD:5.7MM BLACK	A/R	

TOLERANCE UNIT( mm)	APPROVALS	DATE
X. ±0.30	DRAWN Winki	08/24/2018
X.X ±0.25	CHECKED Jenny	08/24/2018
X.XX ±0.15	APPROVED Johnson	08/24/2018
X.XXX ±0.08		
ANGULAR ±2°		

<b>TC&amp;C Electronics Co.,Ltd</b>			
TITLE DB 9M+六角螺母 TO RJ-45 PLUG+護套, FTP 24#X4P+DA, L=共用			
SCALE N.A.	PART NO.	DRAWING NO.	REV.
SHEET 1 OF 1	T106064081806-X	T106064081806-X A	A
CUSTOMER CODE	CUSTOMER PART NO.		



**NOTE:**  
1.OPEN/SHORT TEST:100%;  
2.CONDUCTOR RESISTANCE:5Ω;  
3.INSULATION RESISTANCE:20MΩ;  
4.HI-POT TEST:300V/DC;  
5.ALL MATERIALS MUST ACCORD WITH RoHS;