


AC-KIT-888S

Realtek ALC888S 7.1 Channel HD Audio Peripheral Board, RoHS

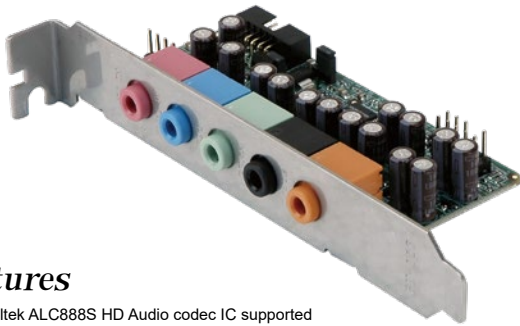


Features

- Realtek ALC888S HD Audio codec IC supported
- Five audio jacks for microphone, 7.1+2-channel high definition audio input and output
- High performance 7.1+2-channel high definition audio board provides 7.1-channel sound playback and multiple streaming through the front panel stereo outputs
- Digital to Analog Converter (DAC) with 97dB Signal to Noise Ratio (SNR)
- Analog to Digital Converter (ADC) with 90dB Signal to Noise Ratio (SNR)
- All the Digital to Analog Converter (DAC) supports 44.1k/48k/96k/192kHz sampling rate
- All the Analog to Digital Converter (ADC) supports 44.1k/48k/88.2k/96k/192kHz sample rate
- Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian)
- CE/FCC compliant

Packing List

1 x AC-KIT-888S audio peripheral board	
1 x Audio cable	1 x QIG

Dimensions (Unit: mm)

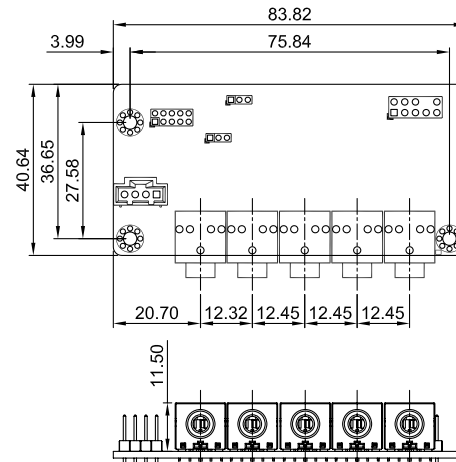

Ordering Information

AC-KIT-888S-R10	Realtek ALC888S 7.1 Channel HD Audio peripheral board, RoHS
32107-001100-100-RS	Audio cable with length of 200 mm, 2x5 pin, pitch=2.0 mm

AC-KIT08R

Audio Converter Card via Realtek ALC655 AC'97 5.1-Channel Audio Daughter Board, RoHS




Features

- Realtek ALC655 AC'97 audio codec IC supported
- Three audio jacks for microphone, 5.1-channel AC'97 audio input and output
- Full duplex AC'97 2.3 compatible 5.1-channel audio codec designed for PC multimedia system
- Supports double sampling rate (96kHz) of DVD audio playback
- Driver supports Windows® 2000/2003/XP/VISTA/7 (32/64 bits) and Linux (Ubuntu or Debian)
- CE/FCC compliant

Packing List

1 x AC-KIT08R audio peripheral board	
1 x Audio cable	1 x QIG

Dimensions (Unit: mm)

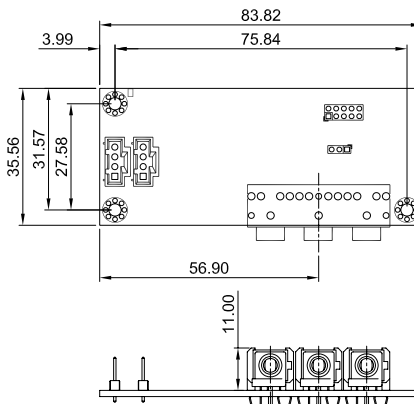


Ordering Information

AC-KIT08R-R10	Realtek ALC655 AC'97 5.1-channel audio peripheral board
32107-001100-100-RS	Audio cable with length of 200 mm, 2x5 pin, pitch=2.0 mm

IO-KIT-001-R20


DVI and 4 x USB 1.1/2.0 Translation Daughter Board with Bracket, RoHS

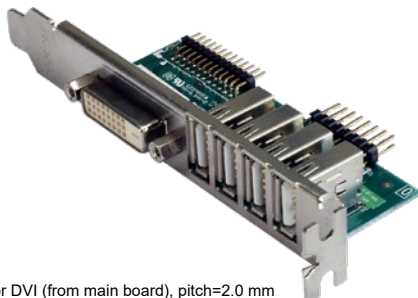

Features

- 26-pin header for DVI (from main board), pitch=2.0 mm
- 2 x 8-pin header for USB 1.1/2.0 (from main board, four sets), pitch=2.54 mm
- DVI-D connector on edge
- Four USB 1.1/2.0 connectors on edge
- CE/FCC compliant

Dimensions (Unit: mm)



Packing List

1 x IO-KIT-001-R20 (DVI and four USB 1.1/2.0 translation daughter board)
1 x DVI cable
1 x USB cable
1 x QIG

Ordering Information

IO-KIT-001-R20	DVI and four USB 1.1/2.0 translation daughter board
32001-009900-100-RS	USB cable with length of 200 mm, 2 x 8-pin, pitch=2.54 mm
32104-000100-100-RS	DVI cable with length of 200 mm, 2 x 13-pin, pitch=2.0 mm