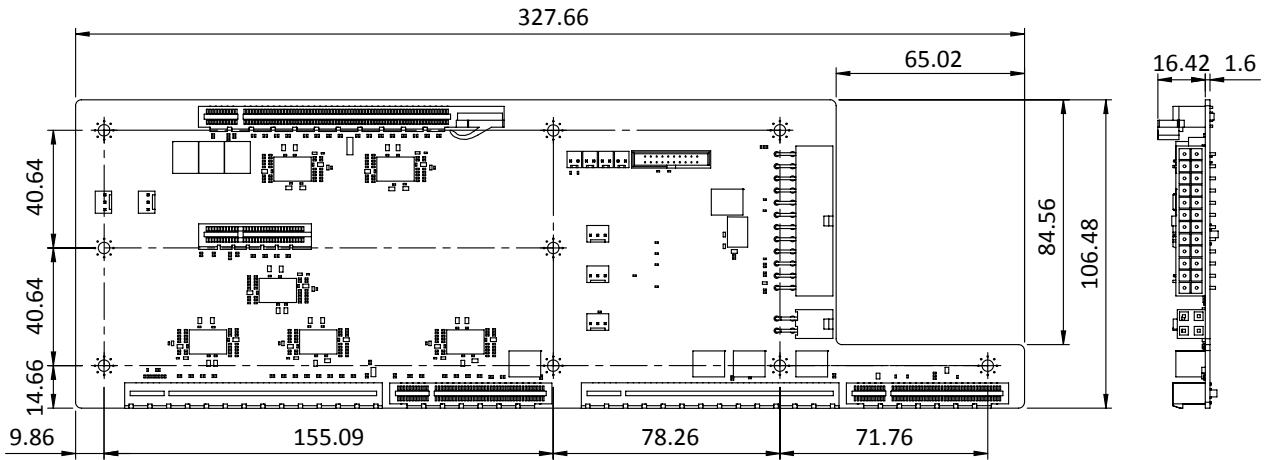


PE-3S1**Dimensions (Unit: mm)****Ordering Information**

Part No.	Description
RACK-500AI-C246-XE/16G/35-R10	5U AI System with Intel® Xeon® E-2176G CPU (3.70 GHz, Hexa Core, TDP 80W) with Intel® C246, pre-installed 16GB ECC DDR4 memory, HDMI, Dual Intel® PCIe GbE, USB 3.2, iAMT, w/ 1 PCIe x16/x4 Slot BP, w/ FSP350(350W), RoHS
RACK-500AI-C246-35-R10	5U AI System with Intel® C246, HDMI, Dual Intel® PCIe GbE, USB 3.2, iAMT, w/ 1 PCIe x16/x4 Slot BP, w/ FSP350, RoHS

Options

Part No.	Description
GPOE-2P-R20	PCI Express Power over Ethernet card, 2-port 1000 Base(T), 802.3at compliant, low profile, RoHS
GPOE-4P-R20	PCI Express Power over Ethernet card, 4-port 1000 Base(T), 802.3at/af compliant, low profile, RoHS
IPCIIE-4POE-R10	PCI Express Power over ethernet card, 4-port 1000 Base(T), 802.3af compliant, RoHS
Mustang-200-i7-1T/32G-R10	Computing Accelerator Card supports Two Intel® Core™ i7-7567U with Intel® 600P 1TB (512GB x2) SSD, 32GB (8GB x4) DDR4, PCIe x4 interface, QTS-Lite, and RoHS
Mustang-200-i5-1T/32G-R10	Computing Accelerator Card supports Two Intel® Core™ i5-7267U with Intel® 600P 1TB (512GB x2) SSD, 32GB (8GB x4) DDR4, PCIe x4 interface, QTS-Lite, and RoHS
Mustang-200-C-8G-R10	Computing Accelerator Card supports Two Intel® Celeron® 3865U with, 8GB (2GB x4) DDR4, PCIe x4 interface, QTS-Lite, and RoHS
Mustang-V100-MX4-R10	Computing Accelerator Card with 4 x Intel® Movidius™ Myriad™ X MA2485 VPU, PCIe Gen2 x2 interface, RoHS
Mustang-V100-MX8-R11	Computing Accelerator Card with 8 x Movidius Myriad X MA2485 VPU, PCIe gen2 x4 interface, RoHS
Mustang-F100-A10-R10	PCIe FPGA Highest Performance Accelerator Card with Arria 10 1150GX support DDR4 2400Hz 8GB, PCIe Gen3 x8 interface
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
AC-KIT-892HD-R10	7.1 channel HD Audio kit with Realtek ALC892 support dual audio streams
SAIDE-KIT01-R10	SATA to IDE/CF Converter board
32102-000100-200-RS	WIRE CABLE; POWER CABLE; SERIAL ATA POWER CABLE; 3; 150MM; 18AWG; (A)MOLEX 8981-4M P=5.08; (B)SATA 15P 180° X2; ONE PCS PKG W/ LABEL; RoHS
32102-044900-100-RS	WIRE CABLE; POWER CABLE; PCIE power cable; 3; 100MM; 20AWG; (A)MOLEX 8981-04M P=5.08*2; (B)TKP:H6657R1-06-B-03 P=4.2; Polywell; RoHS
32102-011500-100-RS	WIRE CABLE; POWER CABLE; ; 3; 150MM; 18AWG; MOLEX 8981-04P P=5.08 X2; MOLEX 8981-04M P=5.08; Wins Precision; RoHS
19100-000238-00-RS	COOLER MODULE; HEATSINK:105*67*12.1mm; FAN:77*75*15.4mm; STANDARD; 00; HF-XFWD-00383-1710; DC FAN:12V, 4P, 5500RPM, TOW BALL; ; Everflow; B127515BU; CCL; RoHS
CA-950GB-R10	19" Rackmount Carrier for Rack-500G/RACK-900G/RACK-500AI