



TGAP-6620-M12 Series

**Industrial EN50155 Dual RF in IEEE 802.11 a/b/g/n
Wireless AP with 2x10/100/1000Base-T(X), M12 connector**

Features

- Leading EN50155-compliant wireless access point for rolling stock application
- High Speed Air Connectivity: WLAN interface support up to 300 Mbps link speed
- Highly Security Capability: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- **Support X-Roaming < 60ms**
- Support external SMA antenna installation
- Support AP/Client /Bridge /AP-Client Mode
- **Support Multiple-SSID to 4 SSID with VLAN**
- Support MAC Filter
- Dual Gigabit Ethernet ports support Ethernet redundant mode (Recovery time < 10ms) and switch mode in M12 connector (A-coding)
- Wireless connecting status monitoring
- **Supports QoS (Quality of service)**
- 1KV isolation for PoE P.D. port for TGAP-6620+-M12
- Secured Management by HTTPS
- Event Warning by Syslog, Email, SNMP Trap, and Relay output
- Rigid IP-40 housing design
- Wall-mount enabled



Introduction

TGAP-6620-M12 is a reliable WLAN Access Point with 2 Ethernet Gigabit ports and dual RF in IEEE 802.11 a/b/g/n wireless modules. It can be configured to operate in Dual AP/Dual Client /Bridge /AP-Client Mode. In combination with its IP-40 design and the superb management functionality, TGAP-6620-M12 provides a dust-tight connection and reverse SMA-type connectors, that can install any reverse SMA-type antennas to extend communication distance. It is specifically designed for the toughest industrial environments. You are able to configure TGAP-6620-M12 by WEB interface via LAN port or WLAN interface. TGAP-6620-M12 can be easily adopted in almost all kinds of applications and provides the most rugged solutions for managing your network in outdoor. In addition, TGAP-6620+-M12 also provides P.D. feature on ETH2 which is fully compliant with IEEE802.3af PoE P.D. specification. Therefore, TGAP-6620-M12 is one of the best communication solutions for wireless applications

Application

In practical operation of wireless access point, Windows utility (Open-Version) is supported. This utility is very helpful for you to search and configure IP of access point on the industrial network.


In addition, the wireless access point support various kinds of operation modes include Dual AP/Dual Client /Bridge /AP-Client Mode.

Pin Definition


Relay Output



Console

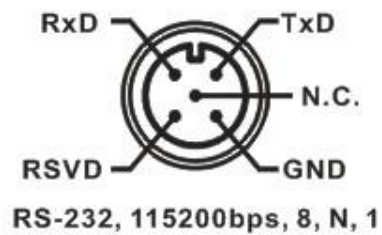


DI




DO



Power

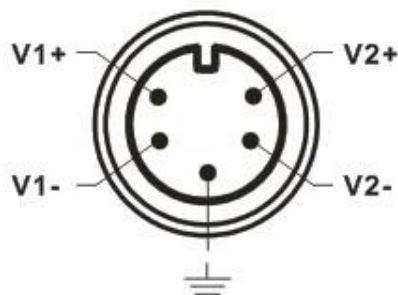


Ethernet



1 BI_DC+
2 BI_DD+
3 BI_DD-
4 BI_DA-
5 BI_DB+
6 BI_DA+
7 BI_DC-
8 BI_DB-

Dimension

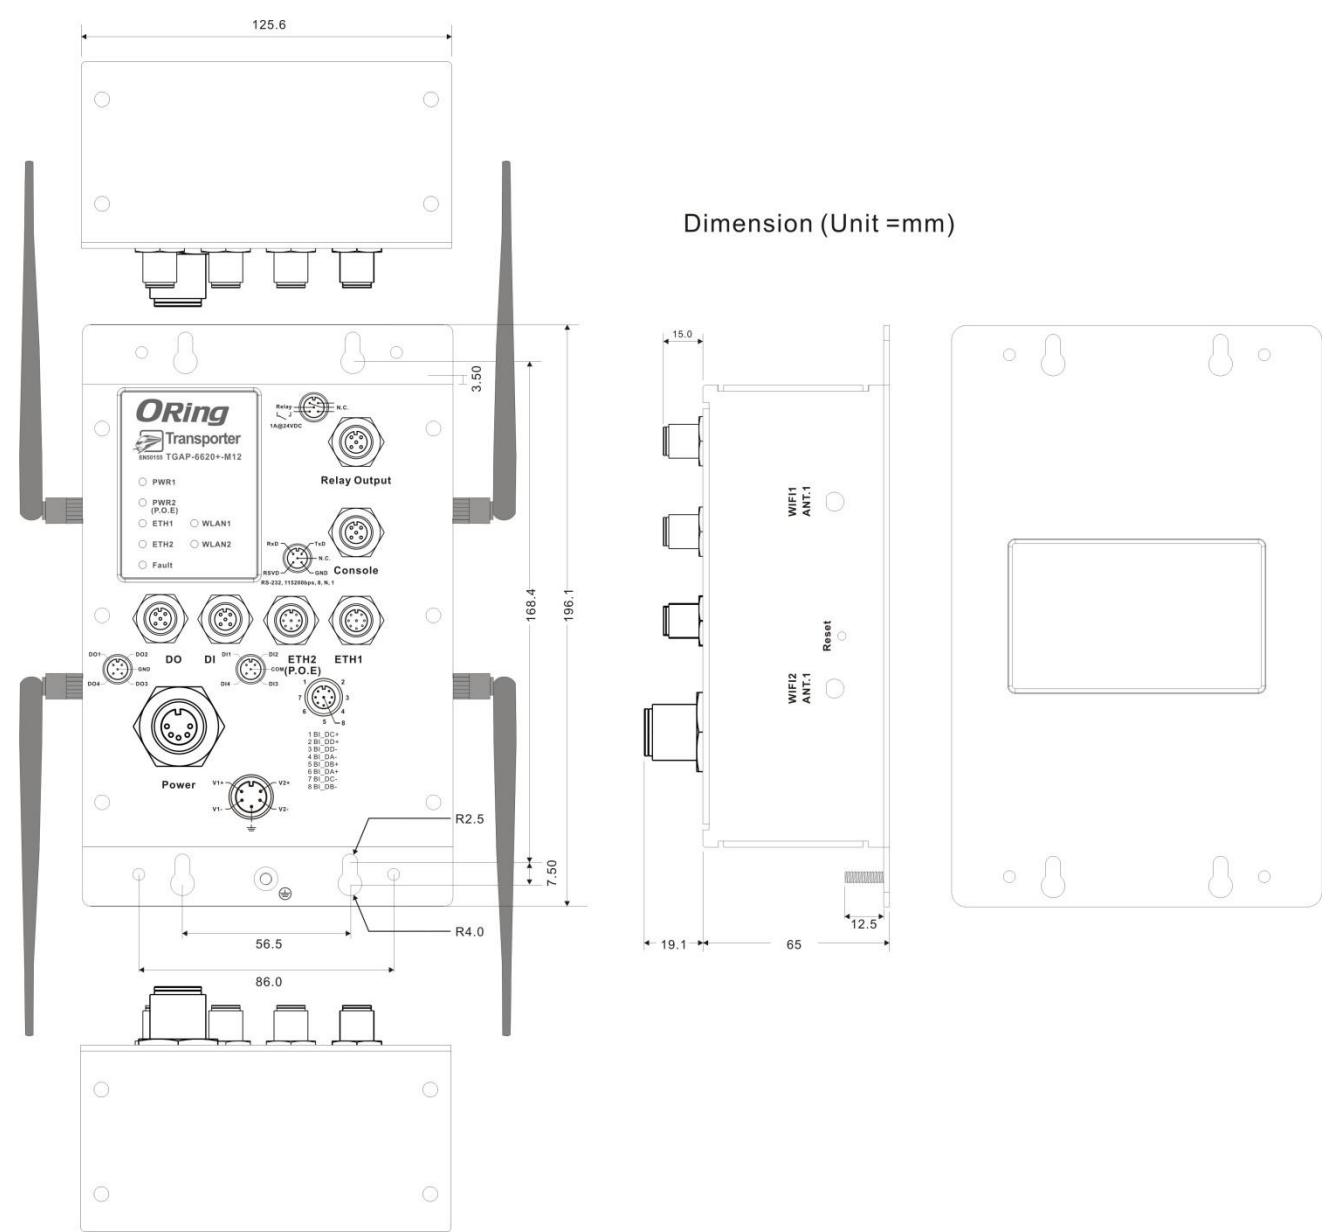

* All specifications are subject to change without notice.


Specifications

ORing WLAN Access Point Model	TGAP-6620-M12	TGAP-6620+-M12
Physical Ports		
10/100/1000Base-T(X) Ports in M12 Auto MDI/MDIX (8-pin A-coding)	2	2(Present at ETH2 Fully compliant with IEEE 802.3af PoE P.D)
DIDO port in M12 (5-pin A-coding)	2(DI x 4 and DO x 4) : Dry Contact: On: short to GND, Off: open Wet Contact (DI to COM/GND): On: 0 to 3VDC, Off: 10 to 30VDC	
RS-232 Console port in M12 (5-pin A-coding)	115200, 8 ,N ,1	
Relay port in M12 (5-pin A-coding)	1A@24VDC	
WLAN interface		
Operating Mode	Dual AP/Dual Client /Bridge /AP-Client Mode	
Antenna Connector	4 x External reverse SMA-type antenna connector	
Radio Frequency Type	DSSS, OFDM	
Modulation	IEEE802.11a : OFDM with BPSK, QPSK, QAM, 64QAM IEEE802.11b: CCK, DQPSK, DBPSK IEEE802.11g: OFDM with BPSK, QPSK, 16QAM, 64QAM IEEE802.11n : BPSK, QPSK, 16-QAM, 64-QAM	
Frequency Band	America / FCC : 2.412~2.462 GHz (11 channels) 5.180~5.240 GHz & 5.745~5.825 GHz (9 channels) Europe CE / ETSI : 2.412~2.472 Ghz (13 channels) 5.180~5.240 GHz (4 channels)	
Transmission Rate	IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE801.11n: up to 300Mbps	
Transmit Power	802.11a: 12dBm ± 1.5dBm@54Mbps 802.11b: 17dBm ± 1.5dBm@11Mbps 802.11g: 16dBm ± 1.5dBm@54Mbps 802.11gn HT20: 15dBm ± 1.5dBm @MCS7 802.11gn HT40: 14dBm ± 1.5dBm @MCS7 802.11an HT20: 12dBm ± 1.5dBm @MCS7 802.11an HT40: 11dBm ± 1.5dBm @MCS7	
Receiver Sensitivity	802.11a : -76dBm ± 2dBm@54Mbps 802.11b : -85dBm ± 2dBm@11Mbps 802.11g : -76dBm ± 2dBm@54Mbps 802.11gn HT20:-75dBm ± 2dBm@MCS7 802.11gn HT40:-72dBm ± 2dBm@MCS7 802.11an HT20:-74dBm ± 2dBm@MCS7 802.11an HT40:-71dBm ± 2dBm@MCS7	
Encryption Security	WEP: (64-bit ,128-bit key supported) WPA/WPA2 :802.11i(WEP and AES encryption) WPAPSK (256-bit key pre-shared key supported) 802.1X Authentication supported TKIP encryption	
Wireless Security	SSID broadcast disable and enable	
Protocol Support		
Protocol	ARP,BOOTP, DHCP, DNS, HTTP, IP, ICMP, SNTP, TCP, UDP, RADIUS, SNMP, STP, RSTP,	
LED indicators		
Power indicator	2 x LEDs, PW1:Green for DC Power on PW2:Green for DC Power on or power by PoE	
10/100/1000Base-T(X) indicator	2 x LEDs, Green for port Link/Act	
WLAN LED	2 x LEDs, Green for WLAN Link /Act	
Fault	1 x LED, Red for Ethernet link down or power down indicator	

Fault contact		
Relay	Relay output to carry capacity of 1A at 24VDC(5-pin M12 A-coding)	
Power		
Input power	Dual Power Inputs. 12~48 VDC	
Power consumption (Typ.)	11Watts	11.5Watts
Physical Characteristic		
Enclosure	IP-40	
Dimension (W x D x H)	125.6(W) x 65(D) x 196.1(H) mm (4.94 x 2.55 x 7.72 inch.)	
Weight (g)	965g	970g
Environmental		
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Operating Humidity	5 to 95% Non-condensing	
Regulatory approvals		
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)	
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11	
Shock	IEC60068-2-27, EN61373	
Free Fall	IEC60068-2-31	
Vibration	IEC60068-2-6	
Safety	EN60950-1	
Warranty	5 years	

Ordering Information

TGAP-ABC0C-M12

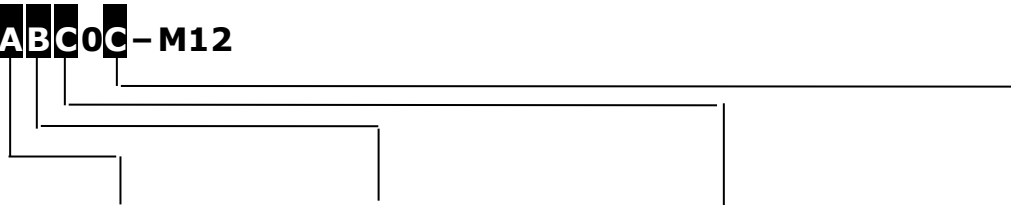

Code Definition	Wireless-1 Mode	Wireless-2 Mode	10/100/1000 Base-T(X) Port Number	PoE Identification
Option	- 1: 802.11 b/g - 2: 802.11 a - 3: 802.11 a/b/g - 4: 802.11 b/g/n - 5: 802.11 a/n - 6: 802.11 a/b/g/n	- 1: 802.11 b/g - 2: 802.11 a - 3: 802.11 a/b/g - 4: 802.11 b/g/n - 5: 802.11 a/n - 6: 802.11 a/b/g/n	- "2": 2 ports	- "+": PoE P.D. present at ETH2

	Model Name	Description
Available Model	TGAP-6620-M12_US	Industrial EN50155 Dual RF in IEEE 802.11 a/b/g/n wireless access point with 2x10/100/1000Base-T(X), US band
	TGAP-6620-M12_EU	Industrial EN50155 Dual RF in IEEE 802.11 a/b/g/n wireless access point with 2x10/100/1000Base-T(X), EU band
	TGAP-6620+-M12_US	Industrial EN50155 Dual RF in IEEE 802.11 a/b/g/n wireless access point with 2x10/100/1000Base-T(X), 1-port PoE P.D, US band
	TGAP-6620+-M12_EU	Industrial EN50155 Dual RF in IEEE 802.11 a/b/g/n wireless access point with 2x10/100/1000Base-T(X), 1-port PoE P.D, EU band

Packing List

- TGAP- 6620-M12 x 1
- Wall Mount Kit x 1
- CD x 1
- 2.4GHz/5GHz Antenna x 4
- Quick Installation Guide x 1

Optional Accessories

- DR-45 series : 45 Watts power supply
- DR-120 series : 120 Watts power supply
- RF Antenna Base series
- DR-75 series : 75 Watts power supply
- WLAN RF Antenna series
- RF Cable series