THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.

CUSTOMER DRAWING

REV.	DESCRIPTION	MDF'D	APP'D	DATE
04	CHANGE SIZE:300	qiufa	Sung	05/30/2019
05	ADD 300 PCS/CARTON	qiufa	Sung	08/13/2019
06	CHANGE LABEL INFO	qiufa	Sung	08/21/2019

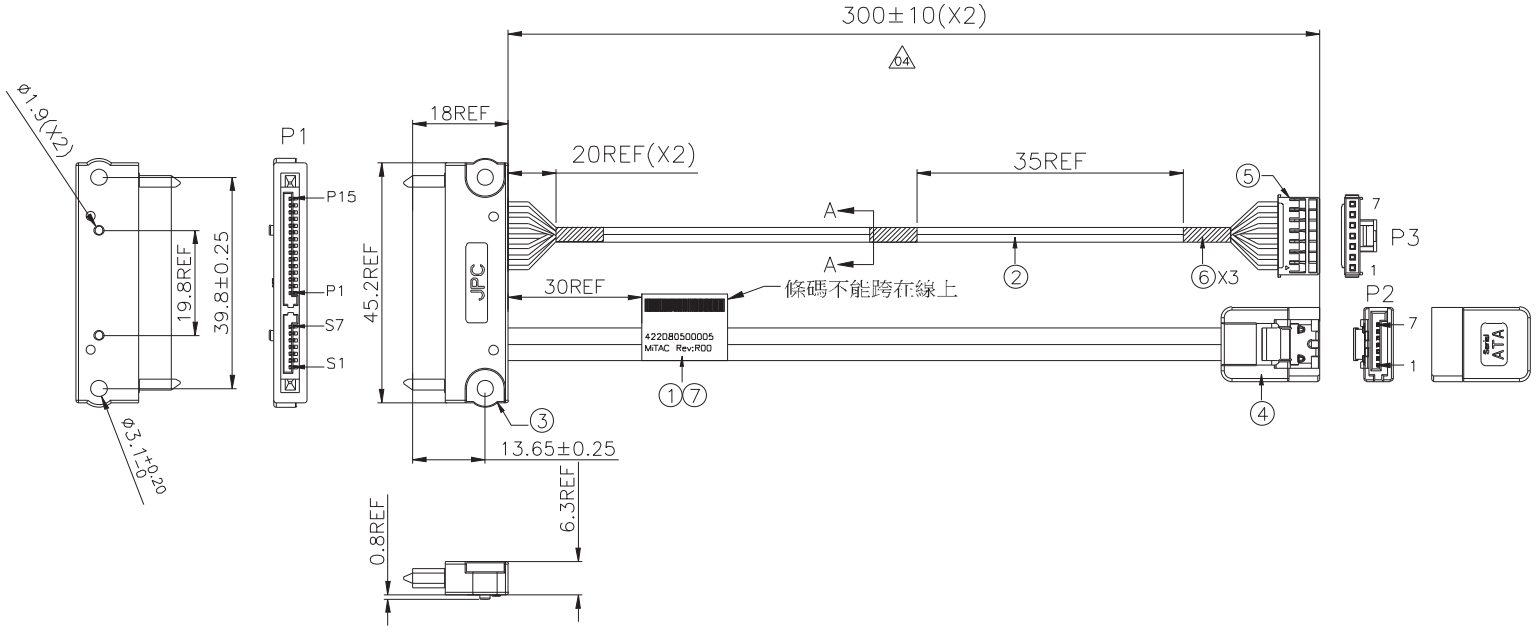

WIRING TABLE

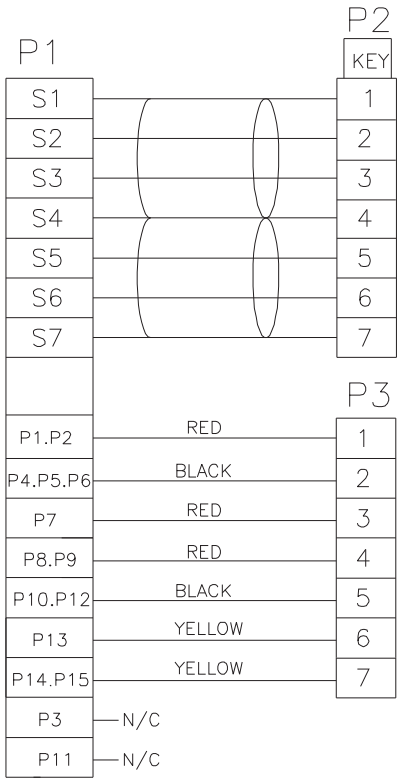

NOTE:

1. THE CABLE SI REQUIREMENT FOLLOW SATA 3.0-6Gbps STANDARD
2. IMPEDANCE REQUIREMEMT:
   a. MATED IMPEDANCE:100±15% @RISE TIME: 70ps (20%-80%)
   b. CABLE IMPEDANCE:100±10% @RISE TIME: 70ps (20%-80%)
3. LABEL INFO
   a. JPC422D80500005YYMMDD
      - DD=DAY OF MANUFACTURE
      - MM=MONTH OF MANUFACTURE
      - YY=THE LAST 2 DIGITAL OF YEAR
      - MiTAC P/N
   b. MiTAC P/N: 422D80500005
   c. MiTAC Rev:R00
   d. BARCODE TYPE: 128 CODE
   e. THE FONT: Arial,BOLD 8.0 pt

CODE:128
Reading:
JPC422D80500005YYMMDD



06 LABEL INFO

CABLE SECTION A-A

Mac Lin
Mac Lin
2019.08.22
09:57:14
+08'00'

ITEM	DESCRIPTION	Q'TY
7	LABEL(W=30mm REF) BLACK TEXT & WHITE BACKGROUND	1
6	ACETATE TAPE (W=20mm),BLACK	A/R
5	7P HSG,PH=2.0mm,COLOR:WHITE,(GOLD PLATE 1u")	1
4	S-ATA CONN 7POS W/LATCH, RECEPTACLE FOR SINGNAL CABLE (GOLD PLATE 30u") W/OVERMOLD	1
3	SATA 22PIN FEMALE CONNECOTR (GOLD PLATE 30u") W/OVERMOLD	1
2	UL 1007 24AWG WIRE(BLACK*2,RED*3,YELLOW*2)	A/R
1	S-ATA CABLE (30AWGX2PAIR), UL 2725, RED COLOR	A/R

RoHS COMPLIANT

Unit : mm

GENERAL TOLERANCES: (UNLESS SPECIFIED)
0 = ±.50
0.0 = ±.25
0.00 = ±.15
0.000 = ±.05
0° = ± 2°
0.0° = ± 1°

PROJECTION

D.R. 11/23/2018 qiufa
CH.K 11/23/2018 RLG
APV.D 11/23/2018 Sung

JPC connectivity

TITLE: SATA 22P TO SATA 7P+7P POWER CABLE ASS'Y
PRODUCT NO. OR LAYOUT: H-0110
SCALE: N/A
SIZE: A3
PART NO.: P1370AA10280-1
REV. 06
SH,T NO. 1OF2