

Nuvo-9000 Series

Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, Patented Cassette & MeziO™ Interface



Key Features

- Supports Intel® 12th-Gen Alder Lake Core™ 16C/ 24T 35W/ 65W CPU
- Patented Cassette for PCI/PCIe add-on card accommodation
- Rugged, -25°C to 70°C fanless operation
- Up to 6x GigE ports with optional PoE+, supporting 9.5 KB jumbo frame
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2 Gen2x1 type-A ports
- Supports M.2 Gen4x4 NVMe and 2x SATA ports
- MeziO™ interface for easy function expansion
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution

Preliminary

*R.O.C Patent No. M456527

Introduction

Nuvo-9000 series is Neosys' new rugged embedded computer based on Intel® 12th-Gen Alder Lake platform. Benefiting from cutting-edge Intel 7 photolithography, the latest Core™ desktop processor comes with up to 16 cores and 24 threads and presents an incredible boost of computational performance. Combining the increase of DDR5 memory bandwidth and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9000 series inherits Neosys' patented expansion Cassette design to provide great versatility by allowing additional installation of PCIe or PCI add-on cards. There are three expansion Cassette options available for Nuvo-9000 series, the Nuvo-9000E features a single x16 Gen3 PCIe slot; Nuvo-9000DE has dual x16 PCIe slots, and Nuvo-9000P has a single PCI slot. For users who need more flexible storage, Nuvo-9000LP has a 2.5" HDD tray instead of an expansion Cassette to support a hot-swappable 2.5" HDD/SSD.

I/O functions are also comprehensively enhanced. In addition to six gigabit Ethernet ports with PoE+ PSE option, Nuvo-9000 series features a USB 3.2 Gen2x2 type-C port offering 20 Gbps bandwidth for data exchange with external devices, plus another eight USB 3.2 Gen2x1 type-A ports for USB3 camera connectivity. It also has an upgraded M.2 Gen4x4 slot to support the latest NVMe SSD to boost disk read/write speed up to 7000 MB/s. For unfulfilled I/O requirements, users can utilize the expansion Cassette to add on function-specific PCIe/ PCI card, the proprietary MeziO interface, and internal mini-PCIe/M.2 interfaces.


With its field-proven thermal design, significant CPU and I/O upgrades, and multiple expansion methods, the Neosys Nuvo-9000 series fits your need for ruggedness, performance, and versatility for a variety of applications.

Specifications


System Core		Expansion Bus	
Processor	Supporting Intel® 12th-Gen Alder Lake Core™ CPU (LGA1700 socket, 35W/ 65W TDP)	PCI/PCI Express	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette (Nuvo-9002E/ 9006E)
	- Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE		2x PCIe x16 slots@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-9002DE/ 9006DE) 1x PCI slot in Cassette (Nuvo-9002P/ 9006P)
Chipset	Intel® 600 Series PCH platform controller hub	Mini PCI Express	1x full-size mini PCI Express socket
Graphics	Integrated Intel® UHD Graphics 770 (32EU)	M.2	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
Memory	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	Expandable I/O	1x MeziO™ expansion port for Neosys MeziO™ modules
AMT	Supports Intel vPro/ AMT 16.0	Power Supply	
TPM	Supports dTPM 2.0	DC Input	1x 3-pin pluggable terminal block for 8 to 48V DC input
I/O Interface		Remote Ctrl. & LED Output	1x 3-pin pluggable terminal block for remote control and PWR LED output
Ethernet port	2x Gigabit Ethernet ports by I219 and I210 (Nuvo-9002E/ P/ DE) with screw-lock	Mechanical	
	6x Gigabit Ethernet ports by I219 and 5x I210 (Nuvo-9006E/ P/ DE) with screw-lock	Dimension	240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-9000E/ P series) 240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-9000DE series)
PoE+	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	Weight	4.4 kg (Nuvo-9000E/ P series) TBD (Nuvo-9000DE series)
USB	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock 4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors	Mounting	Wall-mount (standard) or DIN-rail mount (optional)
Video Port (Integrated Graphics)	1x VGA, supporting 1920 x 1200 resolution	Environmental	
	1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	Operating Temperature	with 35W CPU -25°C ~ 70°C ** with 65W CPU -25°C ~ 70°C *** (configured as 35W TDP) -25°C ~ 50°C *** (configured as 65W TDP)
Serial Port	2x software-programmable RS-232/ 422/ 485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	Storage Temperature	-40°C ~ 85°C
Audio	1x 3.5 mm jack for mic-in and speaker-out	Humidity	10%~90%, non-condensing
Storage Interface		Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
SATA HDD	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD	EMC	CE/FCC Class A, according to EN 55032 & EN 55024

*For sub-zero and over 60°C operating temperature, a wide temperature HDD/ SSD/ NVMe is required.

Appearance

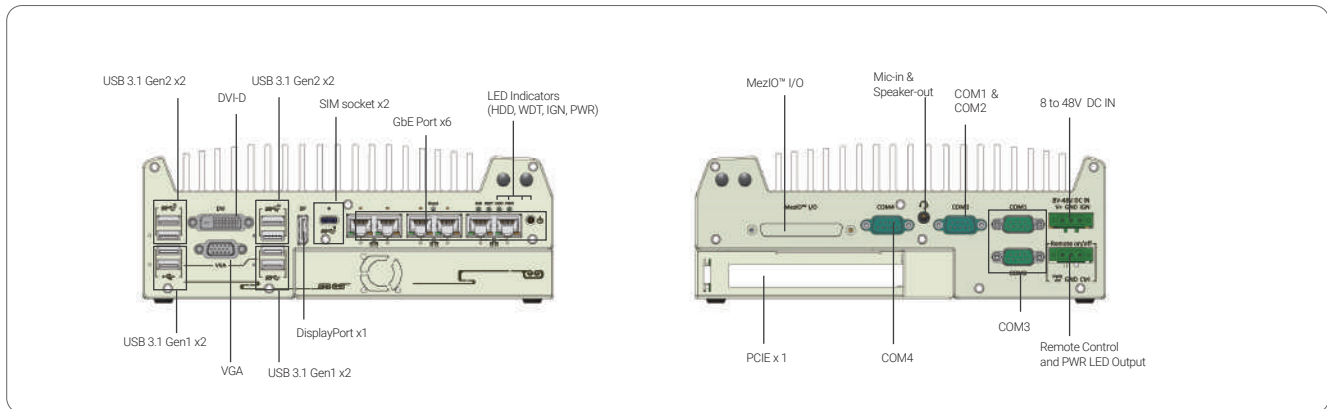

Dimensions

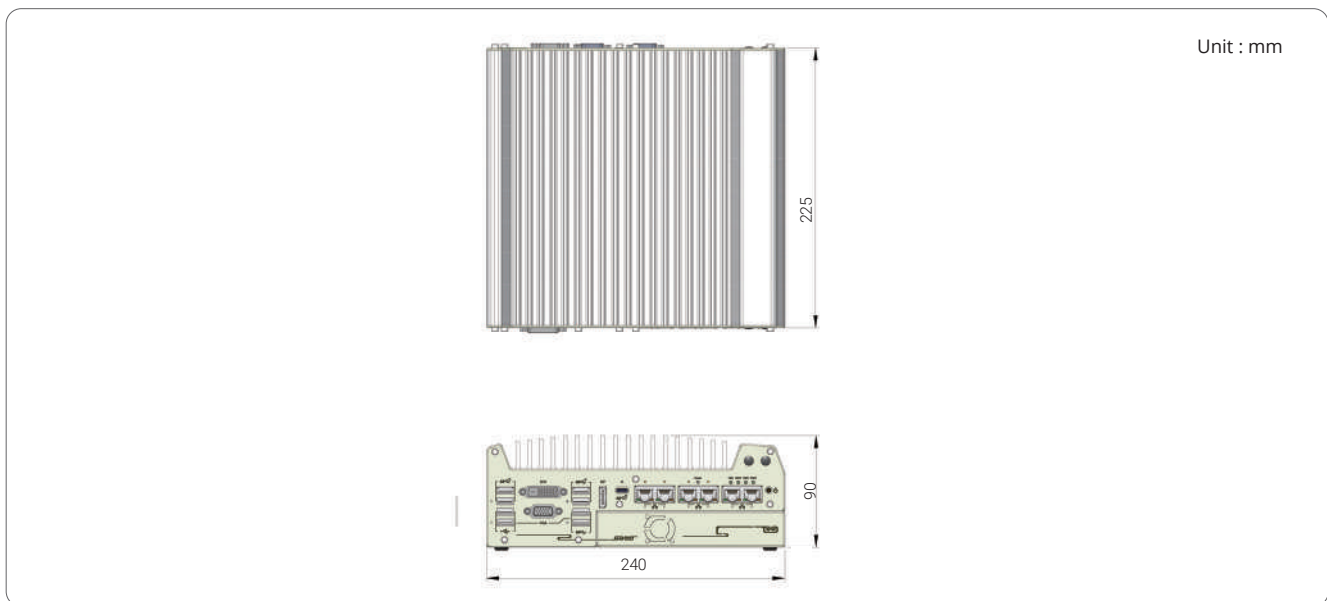

Ordering Information

Model No.	Product Description
Nuvo-9002E	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
Nuvo-9002DE	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
Nuvo-9002P	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
Nuvo-9006E	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
Nuvo-9006DE	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
Nuvo-9006P	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
Nuvo-9002LP	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
Nuvo-9006LP	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
PoE+ Option	Option of 802.3at PoE+ PSE for GbE port 3 ~ port 6

Optional Accessories

DINRAIL-O	DIN-rail mount assembly for Nuvo-9000 series
Dmpbr-Nuvo5000_7000	Neusys' patented damping brackets assembly for Nuvo-9000 Series
PA-160W-OW	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30°C to 70°C.