




TDGAR-1083D+-D5GS-M12X-WV

Industrial EN50155 802.11 ac/g/n 5G Cellular GPS Router with
3x10/100/1000Base-T(X), M12 Connector

Features

- Leading **EN50155**-compliant wireless access point for rolling stock application
- **Provide SNAT/1:1 NAT**
- High Speed Air Connectivity: WLAN interface support **IEEE 802.11 ac/g/n** up to 867Mbps link speed
- Highly Security Capability: WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- Support wireless AP/Client-WAN mode
- Provide 3x10/100/1000Base-T(X) Ethernet with M12 x-coding
- **Supports 5G and LTE Modem dial up**
- Support GPS connection
- Secured Management by HTTPS
- Various kind of WAN Connection Type supported: Dynamic/Static IP, PPPoE, Modem Dial Up
- IP table configurable to prevent access from unauthorized IP address
- Support VPN for secured network connection (Open VPN, IPsec VPN)
- 1KV isolation for PoE P.D. port
- Support NAT Setting (Virtual Server, Port Forward)
- Wireless connecting status monitoring
- Wifi multiple SSID supported
- Event Warning by Syslog, Email, SNMP Trap
- Wall mounting enabled

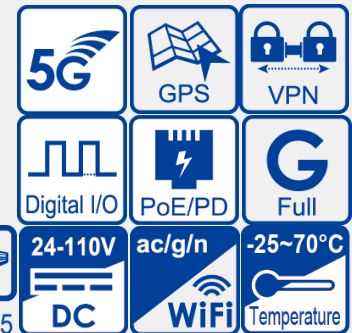





Introduction

ORing's Transporter™ series cellular router is designed for industrial and rolling stock wireless applications, such as vehicle, and railway applications. TDGAR-1083D+-D5GS-M12X-WV is reliable wifi5 router with 3 ports Gigabit Ethernet which is fully compliant with EN50155 certification. It could be configured to operate in 3 modes of routing function: Dynamic/Static IP route, PPPoE authentication, and Cellular modem dial up. Users can set up WLAN environment to fulfill demands of various applications rapidly by dialing up cellular modem. TDGAR-1083D+-D5GS-M12X-WV EN50155 cellular VPN router use M-series connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. In addition, TDGAR-1083D+-D5GS-M12X-WV also provides P.D. feature which is fully compliant with IEEE802.3at PoE P.D. specification and TDGAR-1083D+-D5GS-M12X-WV supports GPS function. Therefore, TDGAR-1083D+-D5GS-M12X-WV is one of the most reliable choices for rolling stock applications on the wireless network.

Dimension





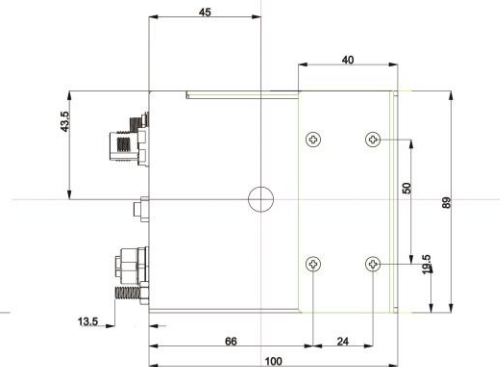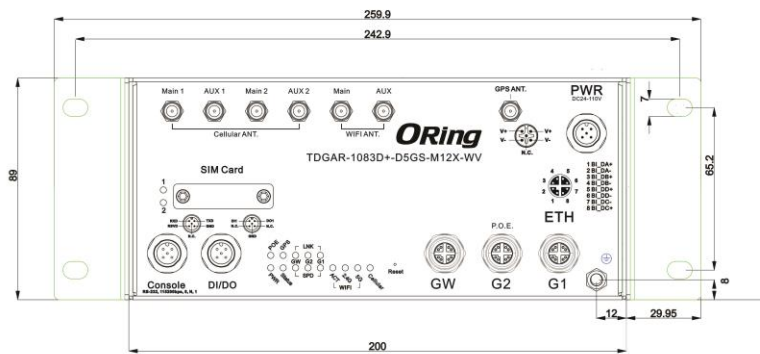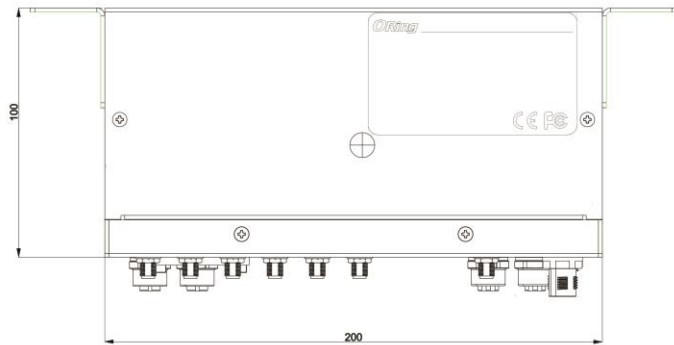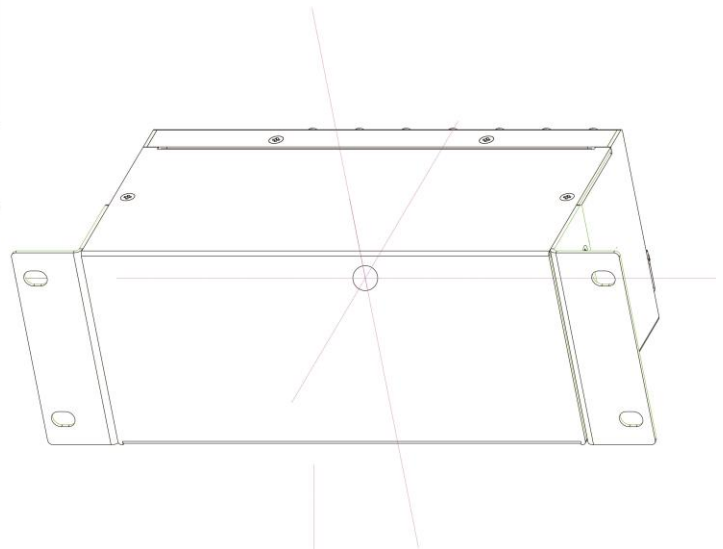

Dimension (Unit =mm)










* All specifications are subject to change without notice.

Pin Definition

 <p>A-coding Male</p>	PWR M12 port		 <p>X-coding Female</p>	10/100/1000Base-T(X) M12 port	
	Pin No.	Description		Pin No.	Description
	#1	V+		#1	BI_DA+
	#2	V+		#2	BI_DA-
	#3	V-		#3	BI_DB+
#4	V-	#4	BI_DB-		
#5	N.C.	#5	BI_DD+		
 <p>A-coding Female</p>	Console M12 port		 <p>A-coding Female</p>	#6	BI_DD-
	Pin No.	Description		#7	BI_DC-
	#1	RXD		#8	BI_DC+
	#2	TXD		DI/DO M12 port	
	#3	RSVD		Pin No.	Description
#4	GND	#1	Digital Input		
#5	N.C.	#2	Digital Output		
		#3	N.C.		
		#4	N.C.		
		#5	GND		

Ant. Configuration

Cellular				WIFI		GPS
Main 1	AUX 1	Main 2	AUX 2	Main	AUX	GPS ANT.
						
617-960MHz 1427-2690MHz 3300-5000MHz 5150-5850MHz	1427-2690MHz 3300-5000MHz	617-960MHz 1427-2690MHz 3300-5000MHz	1427-2690MHz 3300-5000MHz 5150-5850MHz	2412~2462MHz 5180-5825MHz		GPS, GLONASS QZSS Galileo

* All specifications are subject to change without notice.

Specifications

ORing EN50155 LTE Router Model	TDGAR-1083D+-D5GS-M12X-WV
Physical Ports	
10/100/1000Base-T(X) Ports in M12 (8-pin X-coding female)	1(WAN) + 2(LAN)
Sim Card Slot	2
Console Port in M12 (5-pin A-coding female)	1
DI/DO Port in M12 (5-pin A-coding female)	DI x 1, DO x 1 (DI :Logic level 1: 5V~30V, Logic level 0: 0V~2V DO :Maximum Voltage is 30V, Maximum Current is 20mA)
Input Power Port in M12 (5-pin A-coding male)	1
PoE P.D Port	Present at Ethernet (G2) Fully compliant with IEEE 802.3at Power Device specification Over load & short circuit protection Isolation Voltage: 1000 VDC min. Isolation Resistance : 10 ⁸ ohms min
Antenna connector	
WIFI	2 x RP-SMA female
Cellular	4 x SMA female
GPS	1 x SMA female
GPS Interface	
Receiver Type	50 Channels GPS L1 frequency, C/A Code
Time-To-First-Fix	Cold Start: 29s Warm Start: 29s Hot Start: <1s
Sensitivity	Tracking & Navigation: -160dBm Reacquisition: -160dBm Cold Start: -147dBm
Cellular Interface	
Cellular Standard	HSDPA / HSUPA / LTE/ LTE+/ 5G
Band Option	5G NR : n1,n2,n3,n5,n7,n8,n12,n20,n28,n41,n66,n71,n77,n78,n79 LTE : FDD : B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/B26/B28/B29/B30/B32/B66/B71 TDD : B34/B38/B39/B40/B41/B42/B46/B48 WCDMA : B1/B2/B3/B4/B5/B6/B8/B9/B19
WLAN interface	
Modulation	IEEE 802.11a: OFDM IEEE 802.11b: CCK, DQPSK, DBPSK IEEE 802.11g: OFDM IEEE 802.11n: BPSK, QPSK, 16-QAM, 64-QAM IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Frequency Band	America / FCC: 2.412~2.462 GHz 5.180~5.240 GHz & 5.745~5.825 GHz Europe CE / ETSI: 2.412~2.472 GHz 5.180~5.240 GHz
Transmission Rate	IEEE 802.11b: 1/2/5.5/11 Mbps IEEE 802.11a/g: 6/9/12/18/24/36/48/54 Mbps IEEE 802.11n: UP to 300 Mbps IEEE 802.11ac: up to 867Mbps
Transmit Power	IEEE 802.11a: 12dBm ± 2dBm@54Mbps

	IEEE 802.11b: 18dBm ± 2dBm@11Mbps IEEE 802.11g: 15dBm ± 2dBm@54Mbps IEEE 802.11gn HT20: 14dBm ± 2dBm @MCS7 IEEE 802.11gn HT40: 14dBm ± 2dBm @MCS7 IEEE 802.11an HT20: 11dBm ± 2dBm @MCS7 IEEE 802.11an HT40: 10dBm ± 2dBm @MCS7 IEEE 802.11ac VHT80: 7dBm ± 2dBm @MCS9
Receiver Sensitivity	IEEE 802.11a : -71dBm ± 2dBm@54Mbps IEEE 802.11b : -86dBm ± 2dBm@11Mbps IEEE 802.11g : -72dBm ± 2dBm@54Mbps IEEE 802.11gn HT20:-68dBm ± 2dBm@MCS7 IEEE 802.11gn HT40:-66dBm ± 2dBm@MCS7 IEEE 802.11an HT20:-68dBm ± 2dBm@MCS7 IEEE 802.11an HT40:-67dBm ± 2dBm@MCS7 IEEE 802.11ac VHT80:-57dBm ± 2dBm@MCS9
Encryption Security	WEP: (64-bit ,128-bit key supported) WPA/WPA2 :802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) 802.1X Authentication supported TKIP encryption
Wireless Security	SSID broadcast disable
Protocol Support	
Protocol	ARP,BOOTP, DHCP, DNS, HTTP, IP, ICMP, SNTP, TCP, UDP, RADIUS, SNMP, PPPoE, STP (IEEE 802.1D)
LED Indicators	
PWR	1 x LED, Green for DC Power in
POE	1 x LED, Green for POE Power in
Ethernet Port Indicator	6 x LEDs, LNK: Green for port Link/Act. SPD: Green On for 1000/100Base-T(X) link; Green Off for 10Base link
GPS LED	1 x LED, Green on for GPS on, slow blink for connection Act
WLAN(Wifi) LED	3 x LEDs, 1 x LED, Green On: RF on; Off: RF off 1 x LED, Green for WLAN work on 2.4GHz 1 x LED, Green for WLAN work on 5GHz
Cellular LED	1 x LED, Green slow blink for work normal,
SIM LED	2 x LED, Green in used
Status Indicator	1 x LED, Amber slow blink: booting, Green On:for normal
Power	
Input Power	24 ~ 110Vdc
Isolation	DC 2KV/ AC 1.5KV
Power Consumption (Typ.)	25 watts Max.
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	200(W) x 100(D) x 89(H) mm
Weight (g)	<2Kg
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-25 to 70°C (-13 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27, EN61373
Free Fall	IEC60068-2-31

Vibration	IEC60068-2-6, EN61373
Rail Traffic	EN50155
Cooling	EN60068-2-1
Dry Heat	EN60068-2-2
Safety	EN60950-1
Warranty	5 years

Ordering Information

	Model Name	Description
Available Model	TDGAR-1083D+-D5GS-M12X-WV_EU	Industrial EN50155 802.11 ac/g/n 5G Cellular GPS Router with 3x10/100/1000Base-T(X), 1-port PoE P.D, M12 Connector, US band
	TDGAR-1083D+-D5GS-M12X-WV_US	Industrial EN50155 802.11 ac/g/n 5G Cellular GPS Router with 3x10/100/1000Base-T(X), 1-port PoE P.D, M12 Connector, EU band

Packing List

- TDGAR-1083D+-D5GS-M12X-WV x 1
- CD QRcode x 1
- Quick Installation Guide x 1
- Wall-Mount Kit x 2