


PAC-700G 7-slot Half-size Compact Chassis



CD-ROM, and HDD are not included in package.

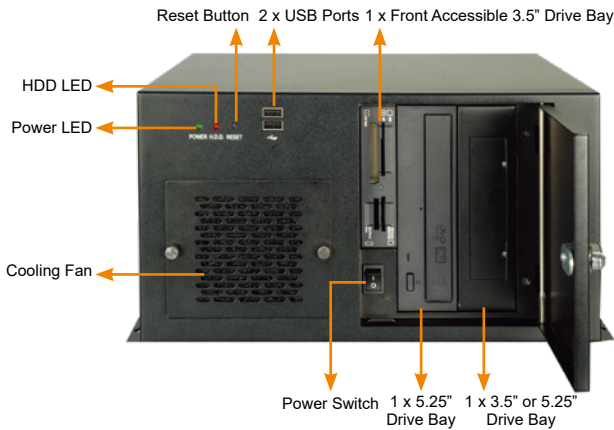

Easy hot-swappable fan



Step 1: Loosen the thumb screws
 Step 2: Pull the fan out gently
 Step 3: Unplug the power connector


Features

- RoHS compliant design
- Two USB ports on the front panel
- One, 8 cm cooling fan with fan filter
- Easy access design for quick fan replacement
- Lockable door prevents unauthorized access

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU card
◆ Drive Combinations	2 x 5.25" + 1 x Front accessible 3.5" or 1 x 5.25" + 2 x Front accessible 3.5" or 1 x 5.25" + 1 x Front accessible 3.5" + 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB on front panel
◆ I/O Openings	2 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	6.2 kg/9 kg
◆ Dimensions (DxWxH)	279 mm x 321 mm x 176 mm

Dimensions (Unit: mm)

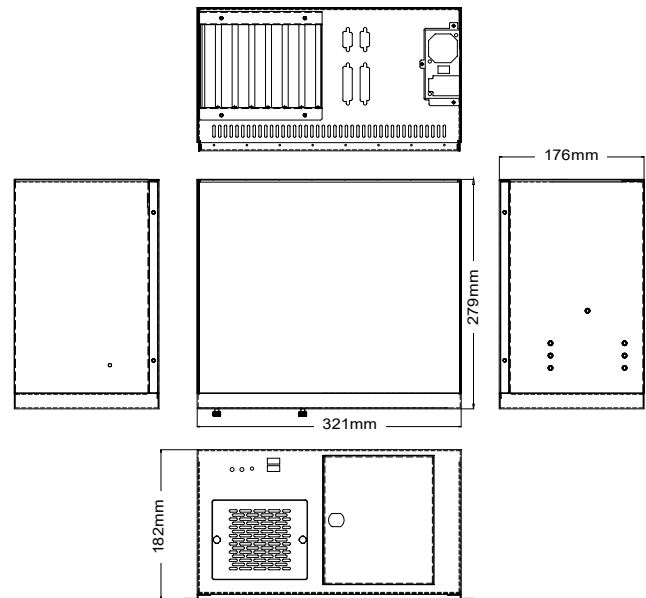

Ordering Information

Part No.	Description
PAC-700BPX-R20/180W	7-Slot Half size chassis, Black, Powder paint, with 180W ATX power supply, RoHS

Cable Options

Part No.	Description
32100-126600-RS (2.54mm→2.0mm)	This optional cable is required for motherboard with 2mm USB connector (the USB cable inside the chassis is with 2.54mm pitch). Refer to motherboard spec. for details.

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-7S-RS	ISA	0	7	0	0	0	0	AT
HPXE2-7S1	HPCIE	3	0	0	0	2	0	ATX

Power Supply Options

Type	Model No.	Watt
ATX	63030-010180-000-RS	180W
	63030-010300-000-RS	300W

PAC-700G supports single PS/2 PSU. For more IEI PSU models, please visit www.ieiworld.com.