


IPCIE-UART-2D2P

PCIe card supports four RS-232/422/485 Port, RoHs

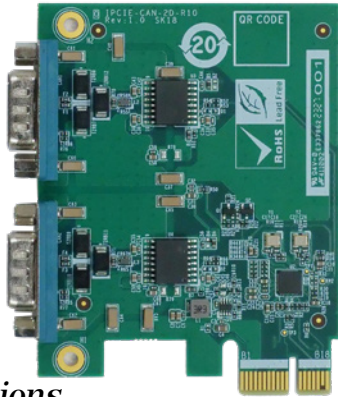


Specifications

Model Name	IPCIE-UART-2D2P
Form Factor	PCI Express® x1
PCI Express Bridge to Quad Serial Port	Fintek F81504
Buffer/Transceiver Series	Fintek F81439
IO	2 x RS-232/422/485 (DB9) 2 x RS-232/422/485 pin header (2x5 pin, P=2.0)
Operating Temperature	0°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~95%, non-condensing
Dimension	70mm x 90mm
Weight	GW: 120g / NW: 80g
Safety	CE/FCC compliant

Features

- PCIe card supports four RS-232/422/485 Port
- 128 bytes transmit/receive FIFO
- High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- Baud rate supports 115.2K, max. up to 1.5M

Dimensions (mm)

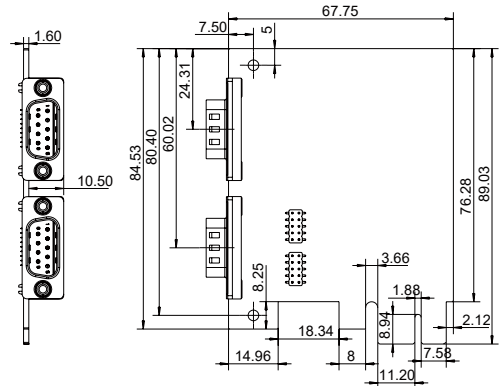

Packing List


1 x IPCIE-UART-2D2P card	1 x IO Shielding
2 x D-SUB9 male cable	1 x QIG

Ordering Information

Part No.	Description
IPCIE-UART-2D2P-R10	PCIe card supports four RS-232/422/485 Port, RoHs

IPCIE-CAN-2D

PCIe card supports 2-Port CAN Bus with Isolation Protection, RoHs

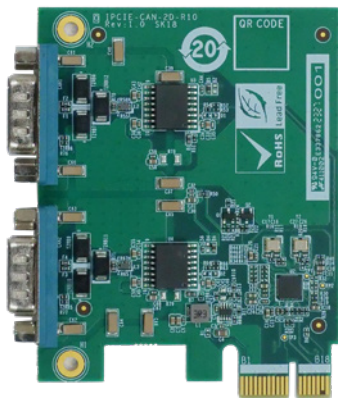


Specifications

Model Name	IPCIE-CAN-2D
Form Factor	PCI Express® x1
PCIe to CAN IC	Fintek F81601
CAN Transceiver IC	Chipanalog CA-IS3062
Protocol	CAN 2.0 A/B
Output Interface	2 x DB9 (CAN 2.0B port with isolation)
Operating Temperature	0°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~95%, non-condensing
Dimension	70mm x 90mm
Weight	GW: 120g / NW: 80g
Safety	CE/FCC compliant

Features

- PCIe card supports 2 x Independent CAN ports
- Up to 1 Mbps transmission speed
- Support 16 MHz CAN controller frequency
- Two CANBus (DB9) port module with isolating

Dimensions (mm)

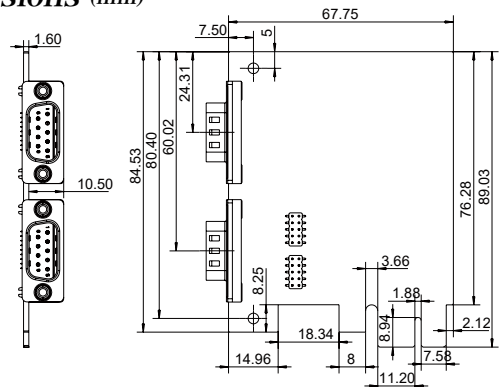

Packing List

1 x IPCIE-CAN-2D card	1 x IO Shielding
1 x IO Shielding	1 x QIG

Ordering Information

Part No.	Description
IPCIE-CAN-2D-R10	PCIe card supports 2-Port CAN Bus with Isolation Protection, RoHs