



Block Diagram

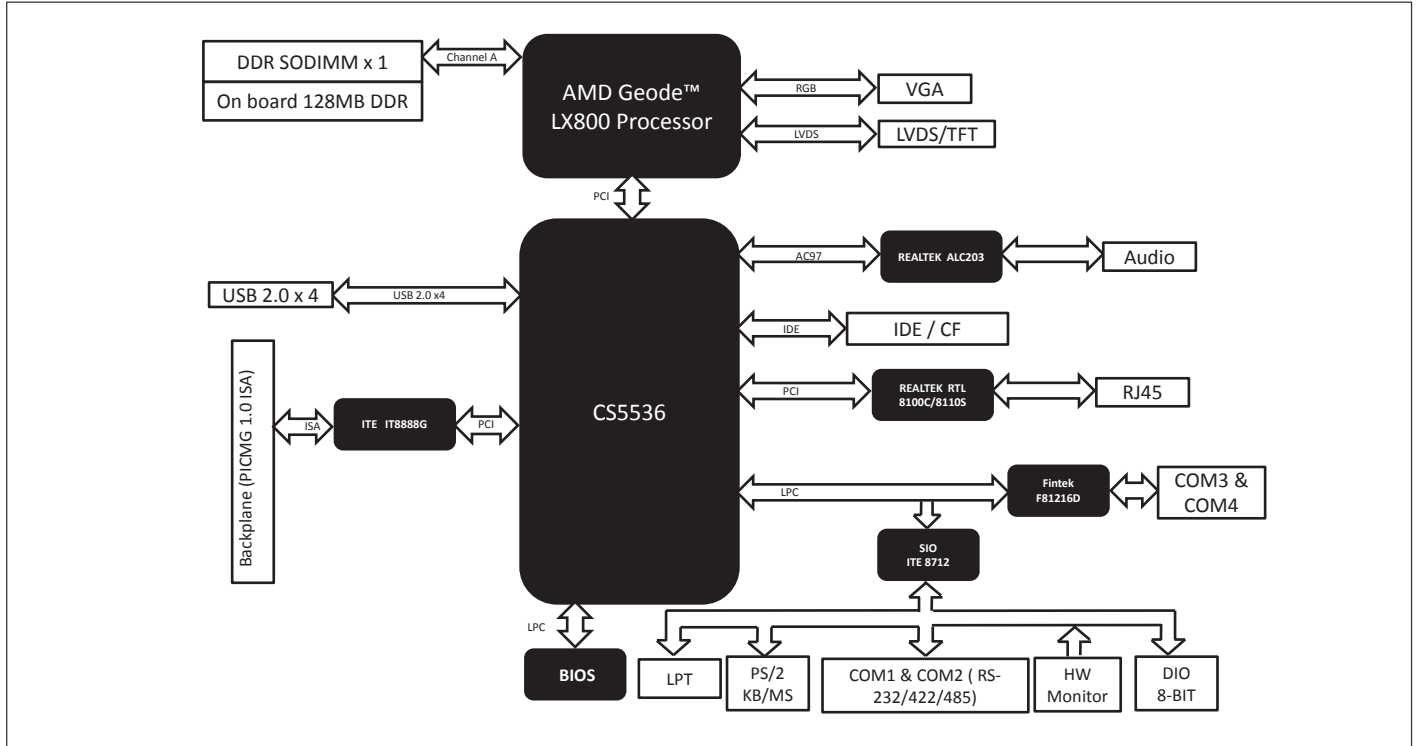

Dimension Unit: mm

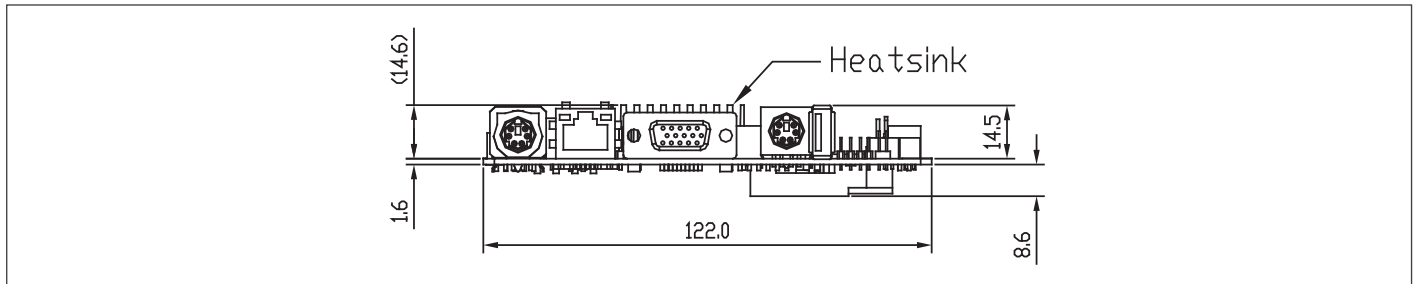

Ordering Information

Part Number	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Temp.
HSB-800I-A11-VG-0001	AMD Geode™ LX800	Onboard 128 MB DDR 400	Fanless	VGA + LVDS/TTL	IDE x 1, Floppy x 1, CF x 1	24b, 1CH	GbE x 1	USB2.0 x 4	3	1	ISA, PC/104	+5V, +12V, AT	0°C ~ 60°C
HSB-800I-A11-VE-0001	AMD Geode™ LX800	Onboard 128 MB DDR 400	Fanless	VGA + LVDS/TTL	IDE x 1, Floppy x 1, CF x 1	24b, 1CH	10/100 Mbps LAN x 1	USB2.0 x 4	3	1	ISA, PC/104	+5V, +12V, AT	0°C ~ 60°C