

# IDGS-C1042GP+



*Industrial 6-port Unmanaged Gigabit Ethernet Switch with 4x10/100/1000/2500Base-T(X) and 2 x1G/10GBase-X, SFP socket*

## Features


- Support 4 ports 10/100/1000/2500Base-T(X) ports
- Support 2 ports 1G/10GBase-X SFP socket
- Support auto-negotiation and auto-MDI/MID-X
- Support Store and forward transmission
- Support flow control
- Rigid IP-40 housing design
- DIN-rail mounting enable



## Introduction

IDGS-C1042GP+ is unmanaged Ethernet Switch with 4x10/100/1000/2500Base-T(X) ports with 2x1G/10GBase-X SFP ports and extended operating temperature range from -40°C to 75°C for the harsh environments. Therefore, the switch is one of the most reliable choices for rolling stock and highly unmanaged Ethernet application.

Dimensions

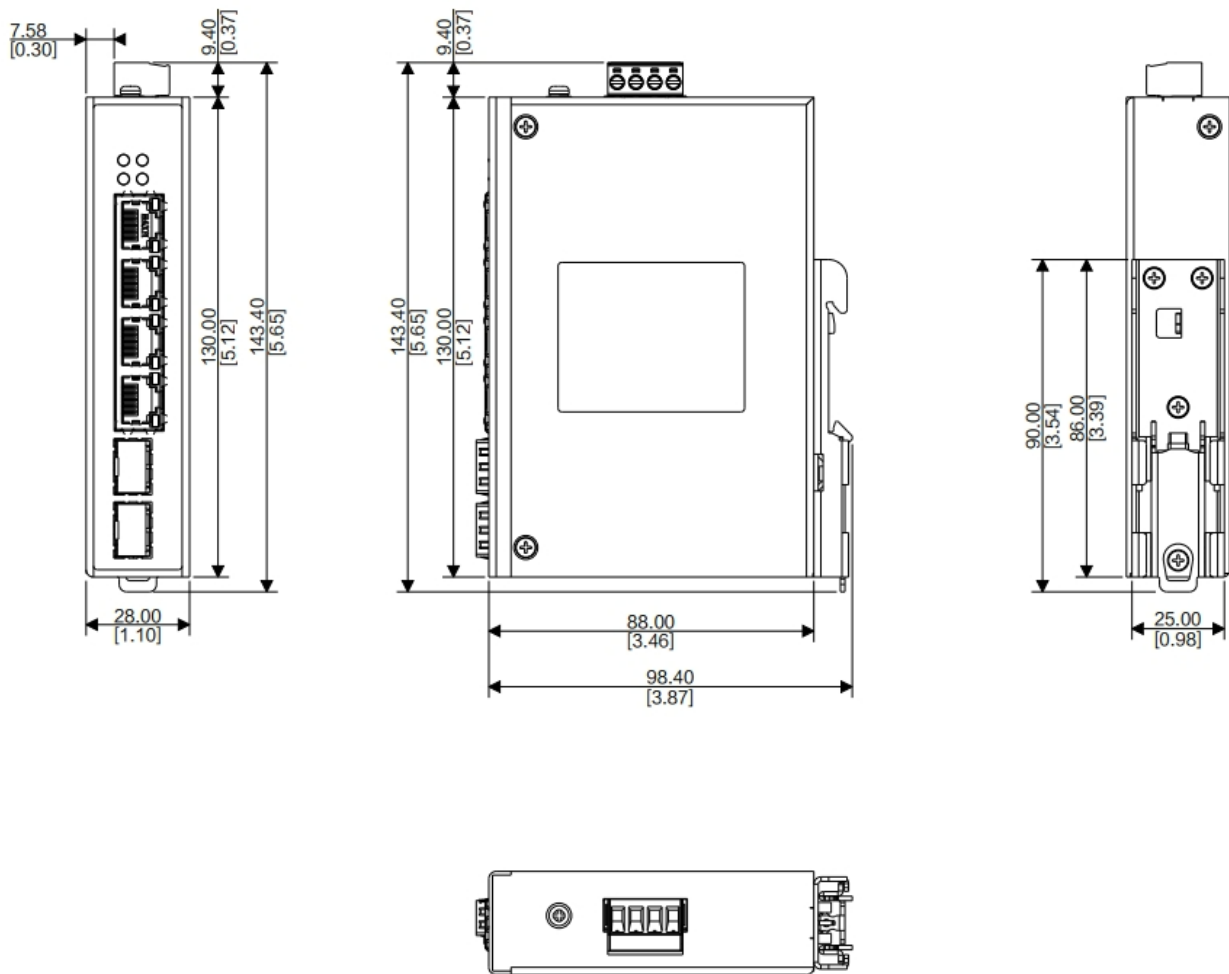

PIN Definition

10/100Base-T(X) RJ-45 port	
RJ-45 PIN Definition	
PIN No.	Description
# 1	TD+
# 2	TD+
# 3	RD+
# 6	RD+

1000Base-T(X) RJ-45 port	
RJ-45 PIN Definition	
PIN No.	Description
# 1	BI_DA+
# 2	BI_DA-
# 3	BI_DB+
# 4	BI_DC+
# 5	BI_DC-
# 6	BI_DB-
# 7	BI_DD+
# 8	BI_DD-

## Specifications

ORing Switch Model	IDGS-C1042GP+
Physical Ports	
10/100/1000/2500Base-T(X) Ports in RJ45 Auto MDI/MDIX	4
1G/10G Base-X with SFP port	2
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3bz for 2.5GBaseT IEEE 802.3ae for 10G SFP+ IEEE 802.3x for Flow control
MAC Table	8K
Processing	Store-and-Forward
Jumbo Frame	16K Bytes
Switch Properties	Switching latency: 10us Switching bandwidth: 60Gbps
LED indicators	
Power Indicator (PWR)	Green: Power LED x2
10/100/1000/2500Base-T(X) RJ45 Port Indicator	Upper LED for Link/Act indicator: Green for port Link/Act Lower LED for Speed : Dual color LED for speed indicator : Green (2500M) / Amber (1000M) / Off-light (10/100M).
1G /10G Base-X SFP Port Indicator	Green for port Link/Act
Power	
Redundant Input power	Dual 12~48VDC on 4-pin terminal block
Power consumption (Typ.)	<10Watts
Overload current protection	Present

Physical Characteristic	
Enclosure	IP-40 Metal
Dimension (W x D x H)	28(W) x 88 (D) x 130(H)mm
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory approvals	
EMC	CE EMC (EN 55035, EN 55032), FCC Part 15 B
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN 62368-1 (LVD)
Warranty	5 years

## Ordering Information

**IDGS-C10****A****B****CC**

Code Definition	10/100/1000/2500Base-T(X) Port Number	Additional Port Number	Additional Port Type
<b>Option</b>	- <b>4</b> : 4ports	- <b>2</b> : 2port	- <b>GP+</b> : <b>1G/10G</b> SFP ports
Available Model	Model Name	Description	
	IDGS-C1042GP+	Industrial 6-port unmanaged Gigabit Ethernet switch with 4x10/100/1000/2500Base-T(X) and 2x1G/10GBase-X SFP socket.	
<b>Packing List</b>		<b>Optional Accessories</b>	
<ul style="list-style-type: none"> <li>IDGS-C1042GP+ x 1</li> <li>DIN-Rail Kit x 1</li> <li>Quick Installation Guide x 1</li> </ul>		<ul style="list-style-type: none"> <li>DR/SDR/DRP Series DIN-Rail power supply</li> <li>SFP 1G series: 1Gbps SFP Optical transceiver</li> </ul>	