

**Industrial P.O.E.
Lite-Managed Ethernet Switch
IPS-2042 SERIES User's Manual**

**Version 2.0
NOV, 2011.**



ORing Industrial Networking Corp.

Website: www.oring-networking.com

E-mail: support@oring-networking.com

Table of Content

Getting to Know Your Switch	3
1.1 About the IPS-2042 SERIES P.O.E Lite-Managed Industrial Switch	3
1.2 Software Features	3
1.3 Hardware Features.....	3
Hardware Installation	4
2.1 Installing Switch on DIN-Rail.....	4
2.1.1 MountIPS-2042 SERIES on DIN-Rail	4
2.2 Wall Mounting Installation.....	5
Hardware Overview	6
3.1 Front Panel	6
3.2 Front Panel LEDs	10
3.3 Bottom Panel	10
Cables	11
4.1 Ethernet Cables	11
4.1.1 100BASE-TX/10BASE-T Pin Assignments.....	11
4.2 Fibers.....	12
4.3 SFP	13
WEB Management	14
5.1 Configuration by Web Browser	14
5.1.1 About Web-based Management	14
5.1.2 Basic Setting	16
5.1.2.1 Switch setting	16
5.1.2.2 Admin Password	16
5.1.2.3 IP configuration.....	17
5.1.2.4 SNTP Configuration.....	18
5.1.2.5 LLDP.....	20
5.1.2.6 Backup & Restore	21
5.1.2.7 Upgrade Firmware	22
5.1.3 Redundancy	22
5.1.3.1 Fast Recovery Mode	22

5.1.3.2	O-Ring.....	23
5.1.3.3	O-Chain.....	24
5.1.3.4	Open-Ring.....	26
5.1.3.5	RSTP.....	27
5.1.4	Port Configuration.....	29
5.1.4.1	Port Control.....	29
5.1.4.2	Port Status.....	30
5.1.4.3	Port Alias.....	30
5.1.5	VLAN.....	31
5.1.5.1	VLAN Configuration – Port Based.....	31
5.1.6	SNMP Configuration.....	32
5.1.6.1	SNMP – Agent Setting.....	32
5.1.6.2	SNMP –Trap Setting.....	33
5.1.6.3	SNMP – SNMP-V3 Setting.....	34
5.1.7	System Warning.....	36
5.1.7.1	Syslog Setting.....	36
5.1.7.2	System Event Log.....	37
5.1.7.3	SMTP Setting.....	37
5.1.7.4	Event Selection.....	39
5.1.7.5	Fault Relay Alarm.....	40
5.1.8	Power Over Ethernet (P.O.E.).....	40
5.1.8.1	Basic Setting.....	40
5.1.8.2	Port Setting.....	41
5.1.8.3	Port Status.....	42
5.1.8.4	Boot Delay.....	42
5.1.8.5	Ping Alive Check.....	43
5.1.8.6	Scheduling.....	44
5.1.9	Save Configuration.....	45
5.1.10	Factory Default.....	45
5.1.11	System Reboot.....	45

Technical Specifications 46

Getting to Know Your Switch

1.1 About the IPS-2042 SERIES P.O.E Lite-Managed Industrial Switch

The IPS-2042 SERIES switch are cost-effect and powerful industrial switch with many features. The switch can work under wide temperature and dusty environment and humid condition. IPS-2042 SERIES support Power over Ethernet, a system to transmit electrical power with data to remote devices over standard twisted-pair cable. The IPS-2042 SERIES switch has 4 X 10/100Base-T(X) P.S.E. (Power Sourcing Equipment) ports which are fully compliant with IEEE 802.3af standard.

The IPS-2042 SERIES switch can be managed by WEB and a useful Window Utility we called Open-Vision. Open-Vision is powerful network management software. With its friendly and powerful interface, you can easily configure multiple switches at the same time, and monitor switches' status

1.2 Software Features

- World's fastest Redundant Ethernet Ring : O-Ring (Recovery time < 10ms over 250 units connection)
- Supports O-Chain technology for multiple ring redundancy
- Supports Ring Coupling, Dual Homing over O-Ring and standard STP/RSTP
- Support fast recovery mode
- Easy-to-configure: Web / Windows utility
- Windows utility (Open-Vision) for network management

1.3 Hardware Features


- Wide Operating Temperature: -40 to 70 °C
- Storage Temperature: -40 to 85 °C
- Operating Humidity: 5% to 95%, non-condensing
- 4 10/100Base-T(X) Ethernet port with P.S.E. provides up to 25 watts
- 2 100Base-FX SFP ports

Hardware Installation

2.1 Installing Switch on DIN-Rail

Each switch has a DIN-Rail kit on rear panel. The DIN-Rail kit helps switch to fix on the DIN-Rail. It is easy to install the switch on the DIN-Rail:


2.1.1 Mount IPS-2042 SERIES on DIN-Rail

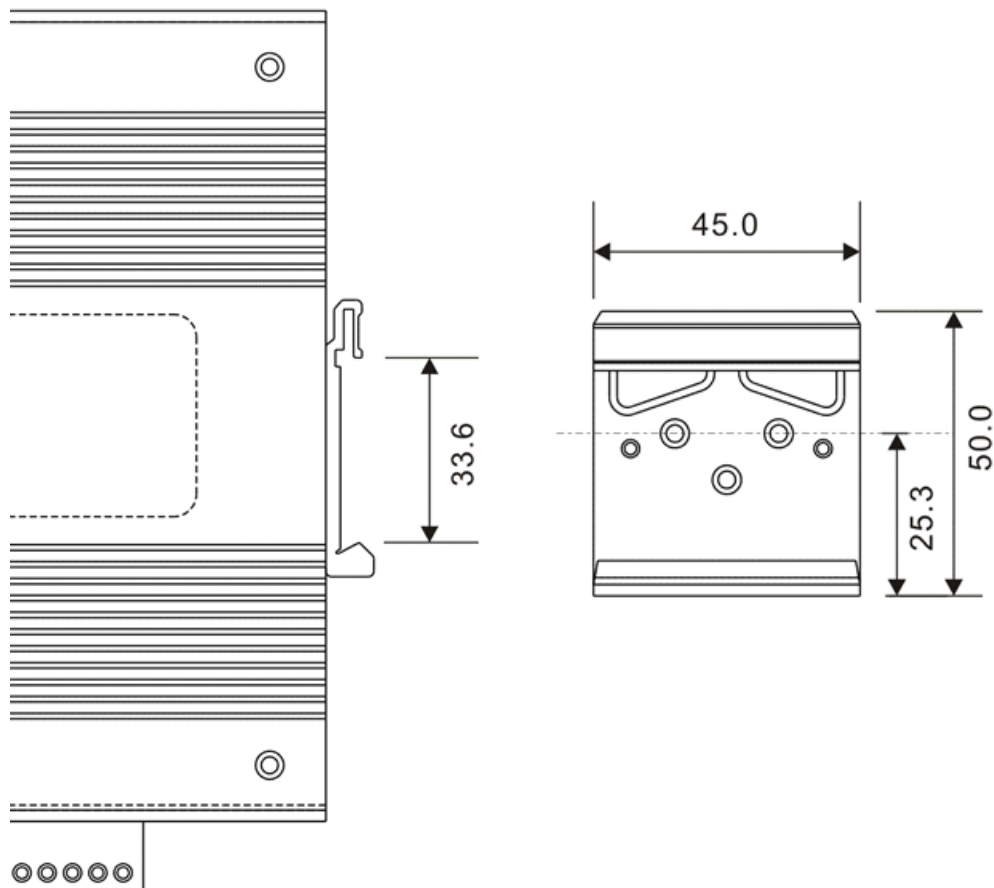

DIN-Rail Size

2.2 Wall Mounting Installation

Each switch has another installation method for users to fix the switch. A wall mount panel can be found in the package. The following steps show how to mount the switch on the wall:

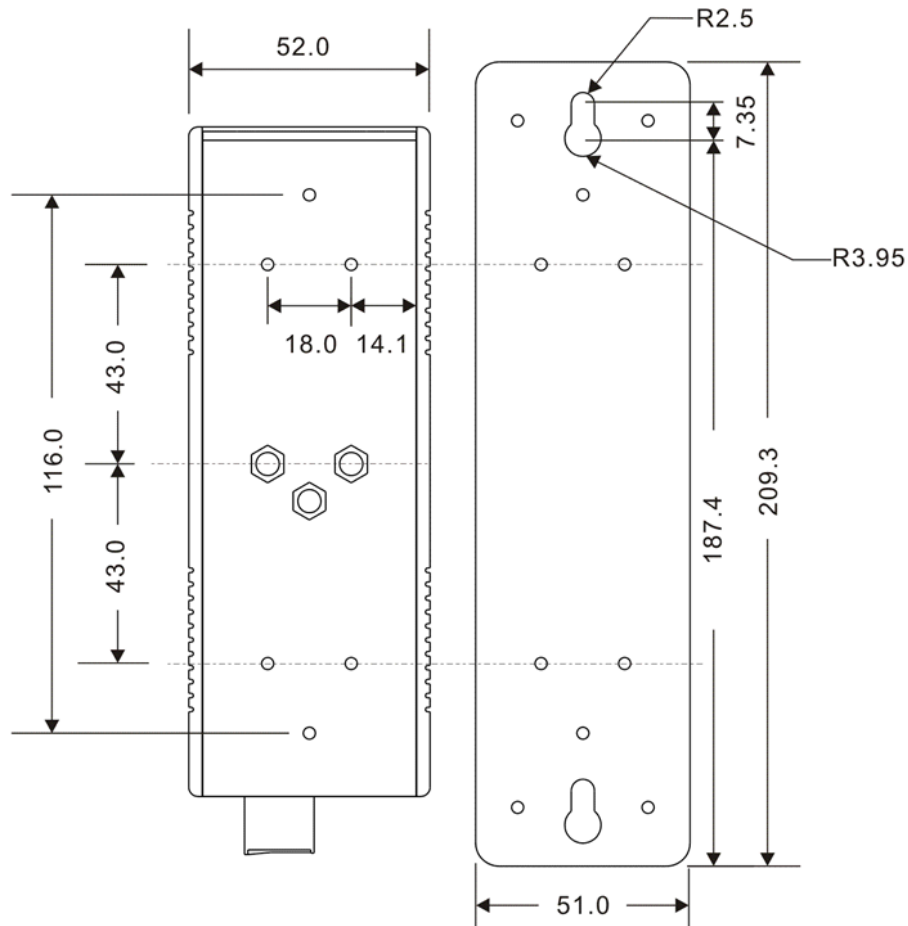

Wall-Mounting size


Hardware Overview

3.1 Front Panel

The following table describes the labels that stick on the IPS-2042 SERIES.


Port	Description
10/100 RJ-45 fast Ethernet ports	10/100Base-T(X) RJ-45 fast Ethernet ports support auto-negotiation. Default Setting : Speed: auto Duplex: auto Flow control : disable
Fiber ports	100Base-FX SFP ports
P.O.E. Ports	Port 1 ~ 4 contain P.S.E. function compliant with IEEE802.3af P.O.E. specifications.
Reset	Push reset button 2 to 3 seconds to reset the switch. Push reset button 5 second to reset the switch into Factory Default .

IPS-2042TX

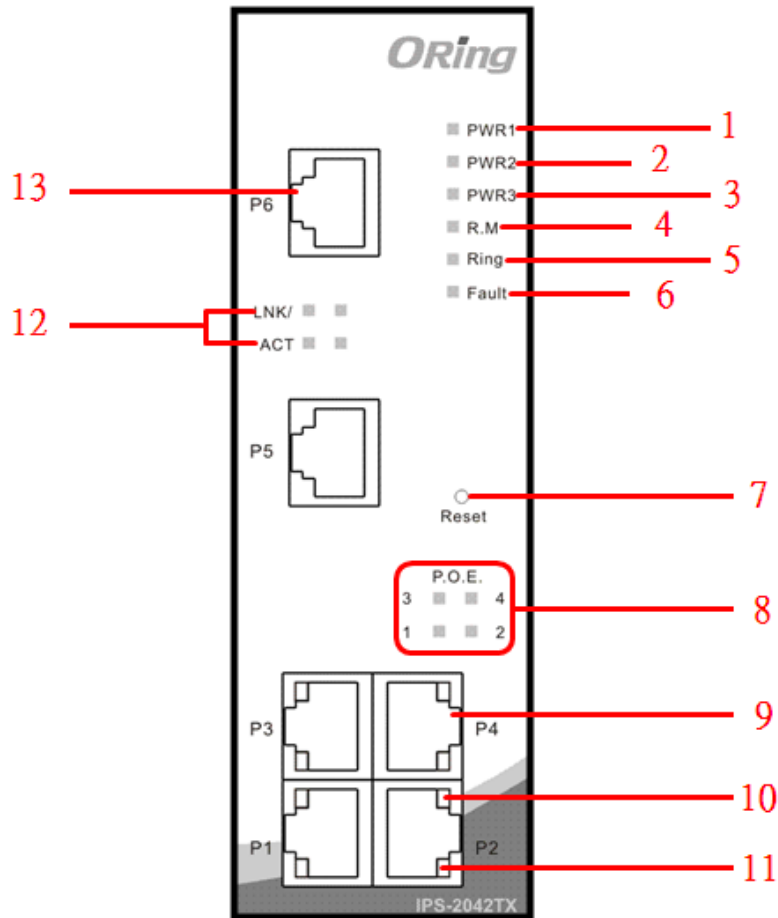


1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of O-Ring.
5. LED for Ring. When the led light on, it means the O-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for Ethernet ACT/LINK status
13. 10/100Base-T(X) Ethernet ports..

IPS-2042FX

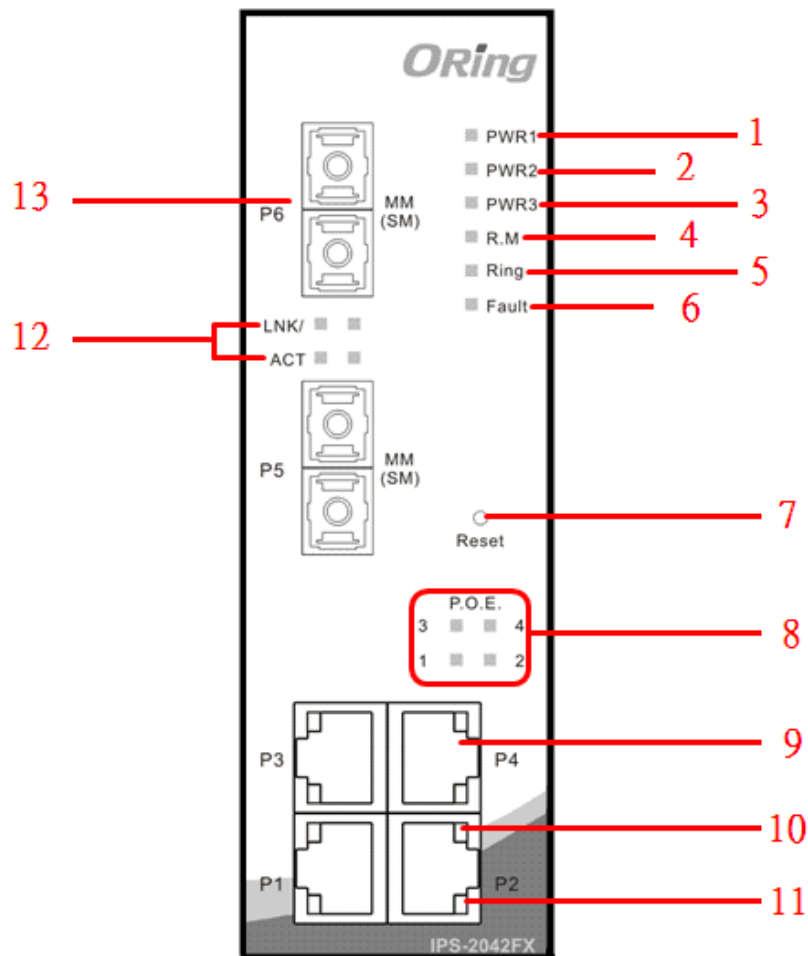

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of O-Ring.
5. LED for Ring. When the led light on, it means the O-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for Fiber ACT/LINK status
13. 100Base-FX Fiber ports..

IPS-2042P

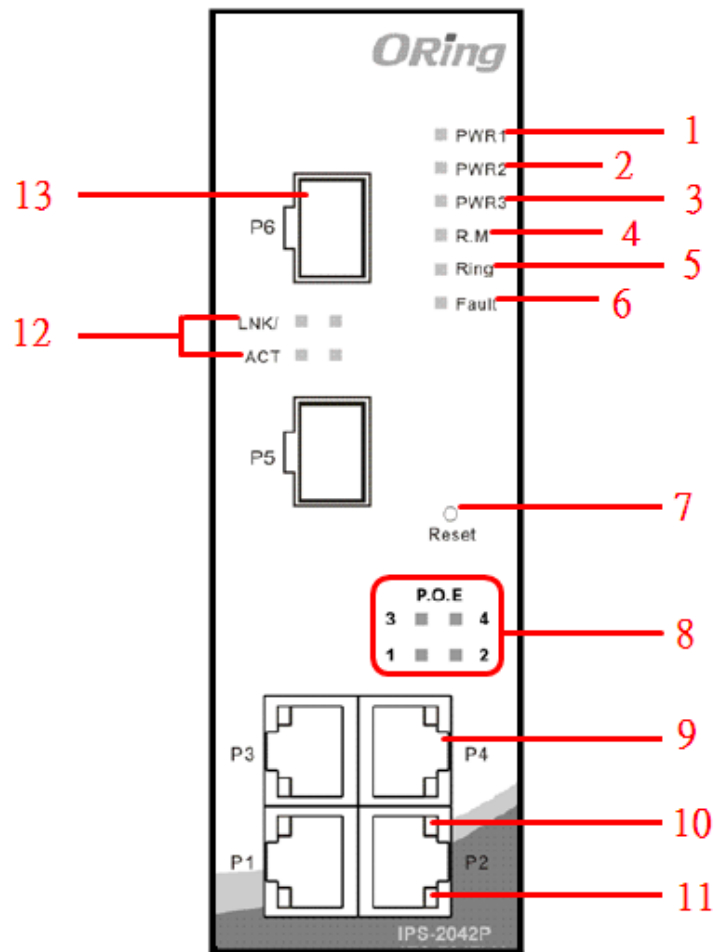

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of O-Ring.
5. LED for Ring. When the led light on, it means the O-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for SFP ACT/LINK status
13. LED for SFP ports status.


3.2 Front Panel LEDs

LED	Color	Status	Description
PWR1	Green	On	DC power module 1 activated.
PWR2	Green	On	DC power module 2 activated.
PWR3	Green	On	Power jack activated.
R.M	Green	On	O-Ring Master.
Ring	Green	On	O-Ring enabled.
		Slowly blinking	O-Ring topology has problem
		Fast blinking	O-Ring work normally.
Fault	Amber	On	Fault relay. Power failure or Port down/fail.
10/100Base-T(X) Fast Ethernet ports			
LNK / ACT	Green	On	Port link up.
		Blinking	Data transmitted.
Link	Amber	On	Port works under Link.
P.O.E.	Green	On	P.O.E. activated
100Base-FX SFP ports			
ACT	Green	Blinking	Data transmitted.
LNK	Amber	On	Port link up.

3.3 Bottom Panel

The bottom panel components of IPS-2042 SERIES are showed as below:

1. Terminal block includes: PWR1, PWR2 (+48V DC) and Relay output (1A@24VDC).
2. Power jack for PWR3 (+48VDC).

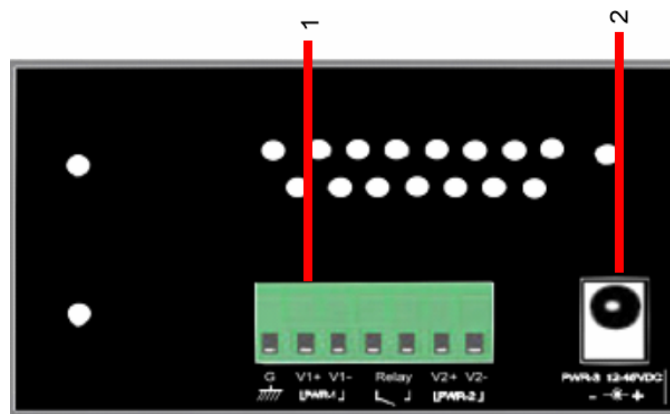

IPS-2042 SERIES power connection

Cables

4.1 Ethernet Cables

The IPS-2042 SERIES switch has standard Ethernet ports. According to the link type, the switch use CAT 3, 4, 5, 5e UTP cables to connect to any other network device (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	RJ-45

4.1.1 100BASE-TX/10BASE-T Pin Assignments

With 100BASE-TX/10BASE-T cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 are used for receiving data.

RJ-45 Pin Assignments

Pin Number	Assignment
1	TD+
2	TD-
3	RD+
4	P.O.E. power input +
5	P.O.E. power input +
6	RD-
7	P.O.E. power input -
8	P.O.E. power input -

The IPS-2042 SERIES switch support auto MDI/MDI-X operation. You can use a straight-through cable to connect PC and switch. The following table below shows the 10BASE-T/ 100BASE-TX MDI and MDI-X port pin outs.


MDI/MDI-X pins assignment

Pin Number	MDI port	MDI-X port
1	TD+(transmit)	RD+(receive)
2	TD-(transmit)	RD-(receive)
3	RD+(receive)	TD+(transmit)
4	P.O.E. power input +	P.O.E. power input +
5	P.O.E. power input +	P.O.E. power input +
6	RD-(receive)	TD-(transmit)
7	P.O.E. power input -	P.O.E. power input -
8	P.O.E. power input -	P.O.E. power input -

Note: "+" and "-" signs represent the polarity of the wires that make up each wire pair.


4.2 Fibers

Only models "IPS-2042FX series" have fiber optical ports. The fiber optical ports are in multi-mode and single-mode with SC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

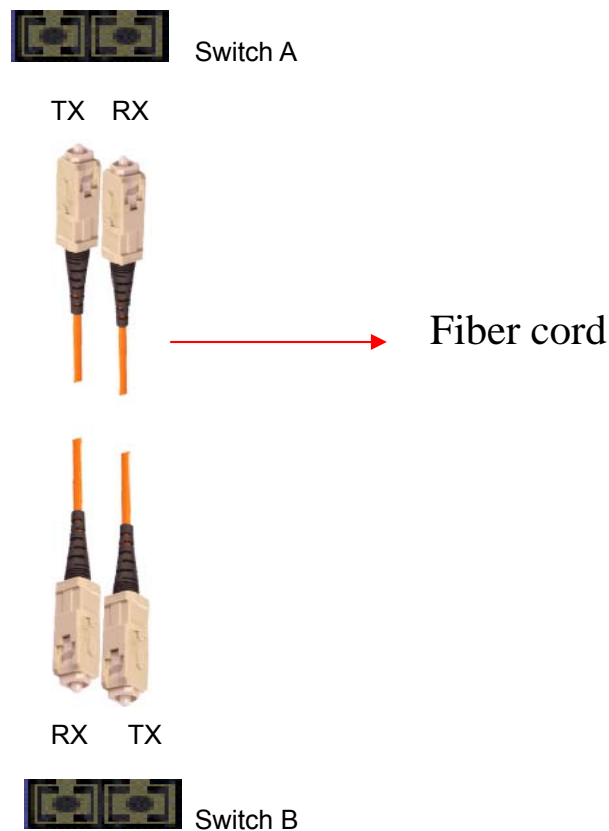

4.3 SFP

Only models "IPS-2042P" have fiber optical ports. has fiber optical ports with SFP connectors. The fiber optical ports are in multi-mode and single-mode with LC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

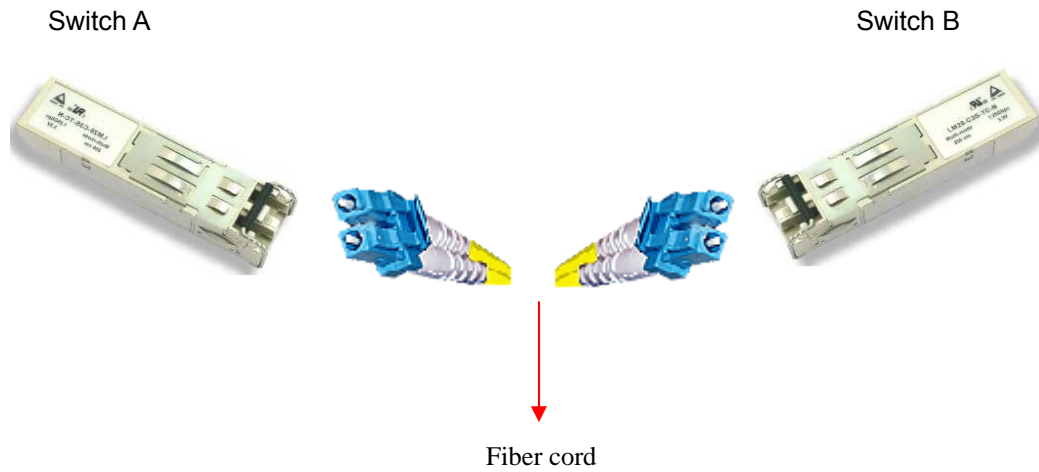

WEB Management



5.1 Configuration by Web Browser

This section introduces the configuration by Web browser.

5.1.1 About Web-based Management

An embedded HTML web site resides in flash memory on the CPU board. It contains advanced management features and allows you to manage the switch from anywhere on the network through a standard web browser such as Microsoft Internet Explorer.

The Web-Based Management function supports Internet Explorer 5.0 or later. It is based on Java Applets with an aim to reduce network bandwidth consumption, enhance access speed and present an easy viewing screen.

Note: By default, IE5.0 or later version does not allow Java Applets to open sockets. You need to explicitly modify the browser setting in order to enable Java Applets to use network ports.

Preparing for Web Management

The default value is as below:

IP Address: **192.168.10.1**

Subnet Mask: **255.255.255.0**


Default Gateway: **192.168.10.254**

User Name: **admin**

Password: **admin**

System Login


1. Launch the Internet Explorer.
2. Type http:// and the IP address of the switch. Press "**Enter**".

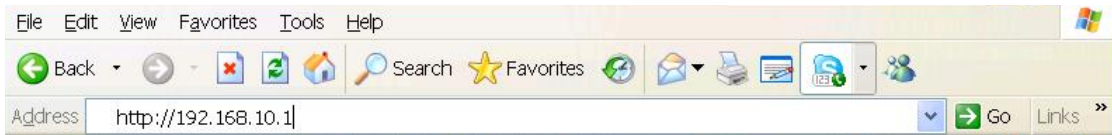

3. The login screen appears.
4. Key in the username and password. The default username and password is “admin”.
5. Click “Enter” or “OK” button, then the main interface of the Web-based management appears.



Login screen

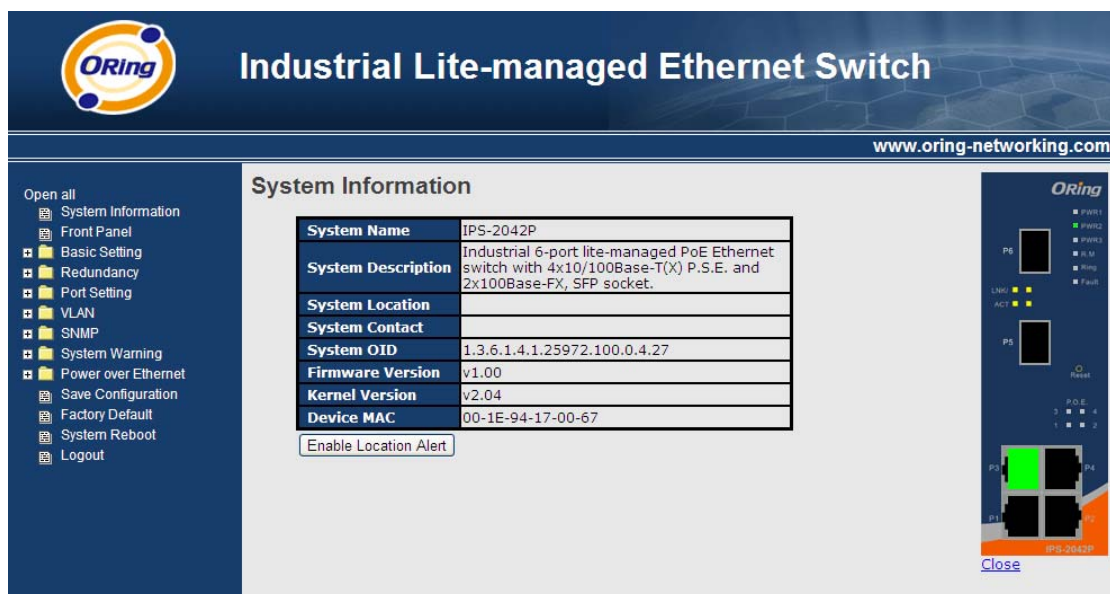

Main interface

5.1.2 Basic Setting

5.1.2.1 Switch setting

Switch Setting

System Name	IPS-2042P
System Description	Industrial 6-port lite-managed PoE Ethernet switch with 4x10/100Base-T(
System Location	
System Contact	

Switch setting interface

The following table describes the labels in this screen.

Label	Description
System Name	Assign the name of switch. The maximum length is 64 bytes
System Description	Display the description of switch.
System Location	Assign the switch physical location. The maximum length is 64 bytes
System Contact	Enter the name of contact person or organization
Firmware Version	Display the switch's firmware version
Kernel Version	Display the kernel software version
MAC Address	Display the unique hardware address assigned by manufacturer (default)

5.1.2.2 Admin Password

Change web management login username and password for the management security issue

Admin Password

User Name	admin
New Password	
Confirm Password	


Admin Password interface

The following table describes the labels in this screen.

Label	Description
User name	Key in the new username (The default is "admin")
New Password	Key in the new password (The default is "admin")
Confirm password	Re-type the new password.
Apply	Click "Apply" to activate the configurations.

5.1.2.3 IP configuration

You can configure the IP Settings and DHCP client function through IP configuration.

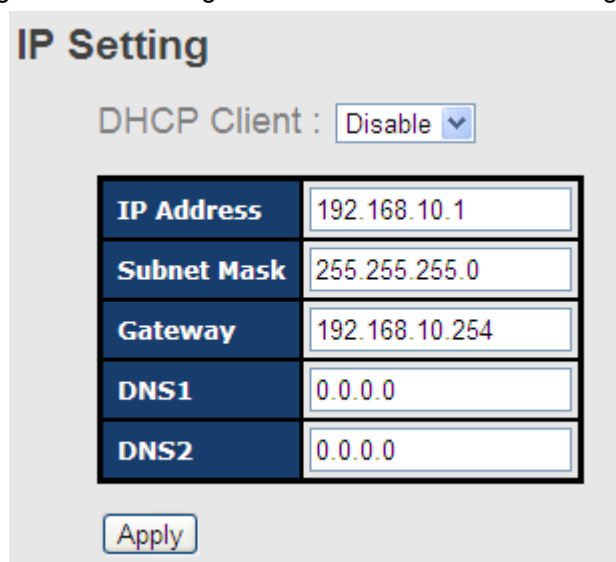

IP Configuration interface

The following table describes the labels in this screen.

Label	Description
DHCP Client	To enable or disable the DHCP client function. When DHCP client function is enabling, the switch will assign the IP address from the network DHCP server. The default IP address will be replaced by the IP address which the DHCP server has assigned. After clicking "Apply" button, a popup dialog will show up to inform you when the DHCP client is enabling. The current IP will lose and you should find the new IP on the DHCP server.
IP Address	Assign the IP address that the network is using. If DHCP client function is enabling, you do not need to assign the IP address.

	The network DHCP server will assign the IP address for the switch and it will be displayed in this column. The default IP is 192.168.10.1
Subnet Mask	Assign the subnet mask for the IP address. If DHCP client function is enabling, you do not need to assign the subnet mask.
Gateway	Assign the network gateway for the switch. The default gateway is 192.168.10.254
DNS1	Assign the primary DNS IP address
DNS2	Assign the secondary DNS IP address
Apply	Click " Apply " to activate the configurations.

5.1.2.4 SNTP Configuration

The SNTP (Simple Network Time Protocol) settings allow you to synchronize switch clocks in the Internet.

SNTP (Time)

SNTP Client :

Daylight Saving Time :

UTC Timezone	<input type="text" value="(GMT)Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London"/>
SNTP Server IP Address	<input type="text" value="192.168.10.66"/>
Current System Time	N/A
Daylight Saving Period	<input type="text" value="2006"/> / <input type="text" value="Jan"/> / <input type="text" value="2"/> <input type="text" value="00"/> ~ <input type="text" value="2006"/> / <input type="text" value="Jan"/> / <input type="text" value="2"/> <input type="text" value="00"/>
Daylight Saving Offset	<input type="text" value="0"/> (hours)

SNTP Configuration interface

The following table describes the labels in this screen.

Label	Description
SNTP Client	Enable or disable SNTP function to get the time from the SNTP server.
Daylight Saving Time	Enable or disable daylight saving time function. When daylight saving time is enabling, you need to configure the daylight saving time period.



UTC Time zone	Set the switch location time zone. The following table lists the different location time zone for your reference.	
Local Time Zone	Conversion from UTC	Time at 12:00 UTC
November Time Zone	- 1 hour	11 am
Oscar Time Zone	-2 hours	10 am
ADT - Atlantic Daylight	-3 hours	9 am
AST - Atlantic Standard EDT - Eastern Daylight	-4 hours	8 am
EST - Eastern Standard CDT - Central Daylight	-5 hours	7 am
CST - Central Standard MDT - Mountain Daylight	-6 hours	6 am
MST - Mountain Standard PDT - Pacific Daylight	-7 hours	5 am
PST - Pacific Standard ADT - Alaskan Daylight	-8 hours	4 am
ALA - Alaskan Standard	-9 hours	3 am
HAW - Hawaiian Standard	-10 hours	2 am
Nome, Alaska	-11 hours	1 am
CET - Central European FWT - French Winter MET - Middle European MEWT - Middle European Winter SWT - Swedish Winter	+1 hour	1 pm
EET - Eastern European, USSR Zone 1	+2 hours	2 pm
BT - Baghdad, USSR Zone 2	+3 hours	3 pm
ZP4 - USSR Zone 3	+4 hours	4 pm


ZP5 - USSR Zone 4	+5 hours	5 pm
ZP6 - USSR Zone 5	+6 hours	6 pm
WAST - West Australian Standard	+7 hours	7 pm
CCT - China Coast, USSR Zone 7	+8 hours	8 pm
JST - Japan Standard, USSR Zone 8	+9 hours	9 pm
EAST - East Australian Standard GST Guam Standard, USSR Zone 9	+10 hours	10 pm
IDLE - International Date Line NZST - New Zealand Standard NZT - New Zealand	+12 hours	Midnight

The following table describes the labels in this screen.

Label	Description
SNTP Sever IP Address	Set the SNTP server IP address.
Daylight Saving Period	Set up the Daylight Saving beginning time and Daylight Saving ending time. Both will be different each year.
Daylight Saving Offset	Set up the offset time.
Switch Timer	Display the switch current time.
Apply	Click " Apply " to activate the configurations.

5.1.2.5 LLDP

LLDP (Link Layer Discovery Protocol) function allows the switch to advertise its information to other nodes on the network and store the information it discovers.

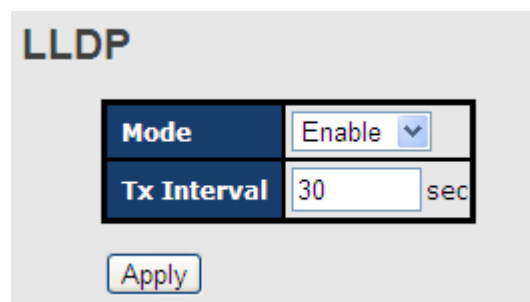


LLDP interface

The following table describes the labels in this screen.

Label	Description
LLDP Protocol	“Enable” or “Disable” LLDP function.
LLDP Interval	The interval of resend LLDP (by default at 30 seconds)
Apply	Click “ Apply ” to activate the configurations.
Help	Show help file.

5.1.2.6 Backup & Restore

You can save current EEPROM value of the switch to TFTP server, then go to the TFTP restore configuration page to restore the EEPROM value.

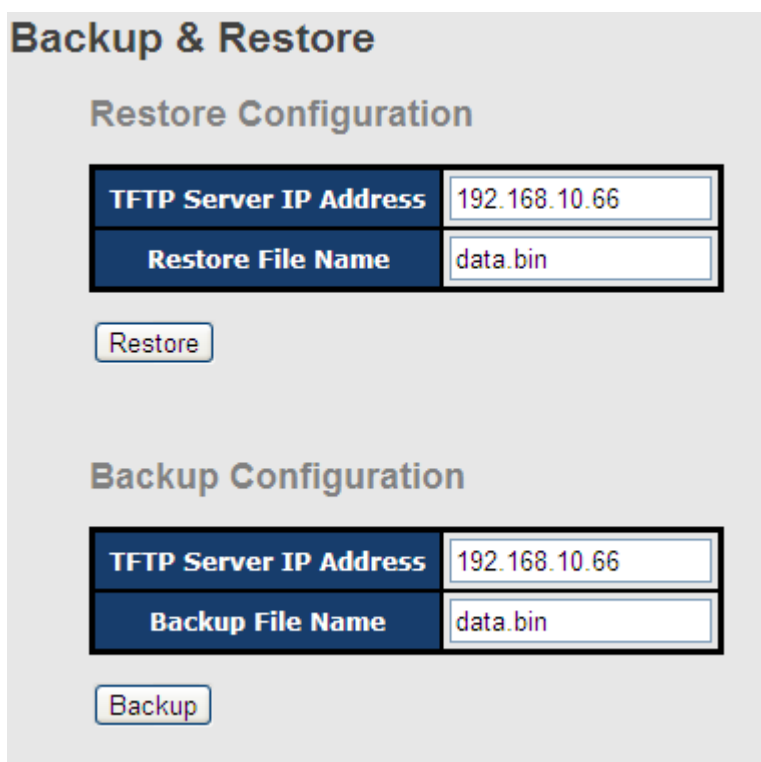

Backup & Restore

Restore Configuration

TFTP Server IP Address: 192.168.10.66

Restore File Name: data.bin

Restore

Backup Configuration

TFTP Server IP Address: 192.168.10.66

Backup File Name: data.bin

Backup


Backup & Restore interface

The following table describes the labels in this screen.

Label	Description
TFTP Server IP Address	Fill in the TFTP server IP
Restore File Name	Fill the file name.
Restore	Click “ restore ” to restore the configurations.
Restore File Name	Fill the file name.
Restore	Click “ restore ” to restore the configurations.
Backup	Click “ backup ” to backup the configurations.

5.1.2.7 Upgrade Firmware

Upgrade Firmware allows you to update the switch firmware. Before updating, make sure you have your TFTP server ready and the firmware image is on the TFTP server.

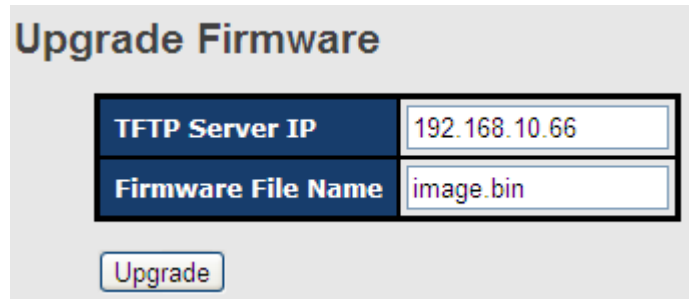

The screenshot shows a web interface titled "Upgrade Firmware". It contains two input fields: "TFTP Server IP" with the value "192.168.10.66" and "Firmware File Name" with the value "image.bin". Below these fields is an "Upgrade" button.

Update Firmware interface

5.1.3 Redundancy

5.1.3.1 Fast Recovery Mode

The Fast Recovery Mode can be set to connect multiple ports to one or more switches. The IPS-2042 SERIES with its fast recovery mode will provide redundant links. Fast Recovery mode supports 4 priorities, only the first priority will be the act port, the other ports configured with other priority will be the backup ports.



The screenshot shows a web interface titled "Fast Recovery Mode". It features a checked checkbox labeled "Active". Below this are six rows, each representing a port and its priority: "Port.01" (1st Priority), "Port.02" (2nd Priority), "Port.03" (2nd Priority), "Port.04" (4th Priority), "Port.05" (5th Priority), and "Port.06" (6th Priority). Each priority is shown in a dropdown menu. An "Apply" button is located at the bottom of the interface.


Fast Recovery Mode interface

The following table describes the labels in this screen.

Label	Description
Active	Activate the fast recovery mode.
port	Port can be configured as 5 priorities. Only the port with highest priority will be the active port. 1st Priority is the highest.
Apply	Click " Apply " to activate the configurations.

5.1.3.2 O-Ring

O-Ring is one of the most powerful Redundant Ring technologies in the world. The recovery time of O-Ring is less than 10 ms over 250 units of connections. It can reduce unexpected malfunction caused by network topology change. O-Ring technology supports three Ring topologies for network redundancy: O-Ring, Coupling Ring and Dual Homing.

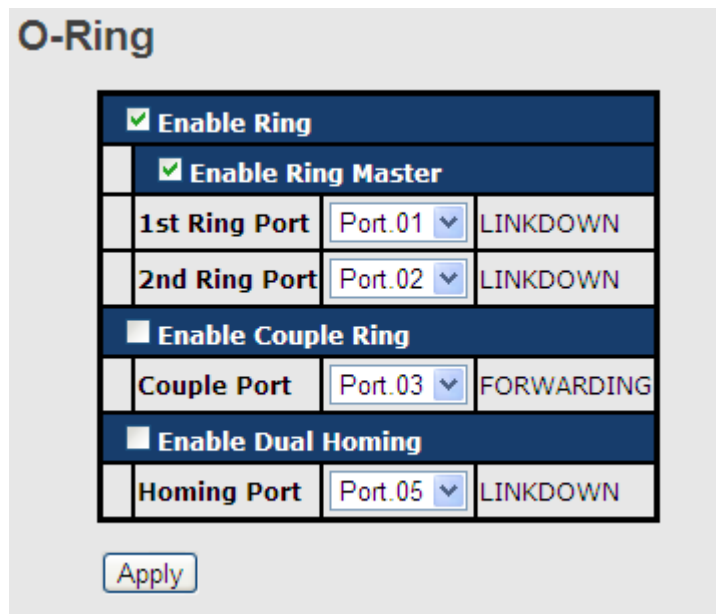

O-Ring interface

The following table describes the labels in this screen.

Label	Description
O-Ring	Mark to enable O-Ring.
Ring Master	There should be one and only one Ring Master in a ring. However if there are two or more switches which set Ring Master to enable, the switch with the lowest MAC address will be the



	actual Ring Master and others will be Backup Masters.
1st Ring Port	The primary port
2nd Ring Port	The backup port
Coupling Ring	Mark to enable Coupling Ring. Coupling Ring can be used to divide a big ring into two smaller rings to avoid effecting all switches when network topology change. It is a good application for connecting two O-Rings.
Coupling Port	Link to Coupling Port of the switch in another ring. Coupling Ring need four switch to build an active and a backup link. Set a port as coupling port. The coupled four ports of four switches will be run at active/backup mode.
Control Port	Link to Control Port of the switch of the same ring. Control Port used to transmit control signals.
Dual Homing	Mark to enable Dual Homing. By selecting Dual Homing mode, O-Ring will be connected to normal switches through two RSTP links (ex: backbone Switch). The two links work as active/backup mode, and connect each O-Ring to the normal switches in RSTP mode.
Apply	Click " Apply " to activate the configurations.

Note: We don't suggest you to set one switch as a Ring Master and a Coupling Ring at the same time due to heavy load.

5.1.3.3 O-Chain


O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology. O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology, i.e. the creation of multiple redundant networks beyond the limitations of current redundant ring technology.

O-Chain

<input checked="" type="checkbox"/> Enable			
	Uplink Port	Edge Port	State
1st	Port.01	<input checked="" type="checkbox"/>	Linkdown
2nd	Port.02	<input type="checkbox"/>	Linkdown


O-Chain interface

Label	Description
Enable	Enabling the O-Chain function
1st Ring Port	Choosing the port which connect to the ring
2nd Ring Port	Choosing the port which connect to the ring
Edge Port	In the O-Chain application, the head and tail of two Switch Port, must start the Edge,MAC smaller Switch, Edge port will be the backup and RM LED Light.

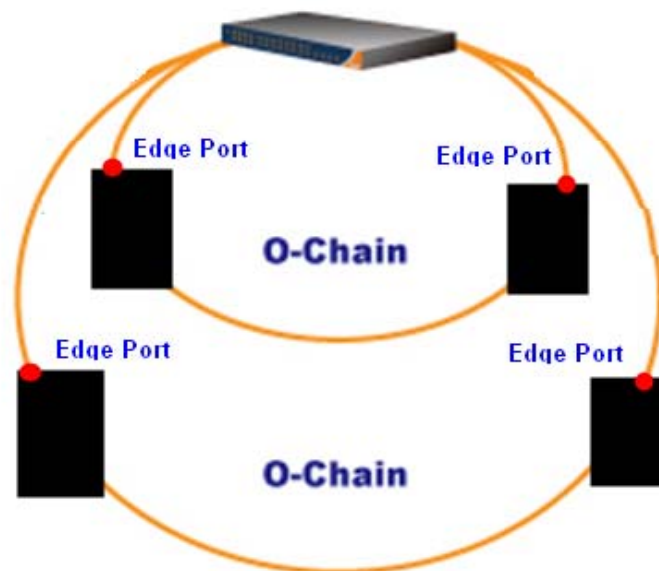

5.1.3.4 Open-Ring


Open-Ring technology can be applied for other vendor's proprietary ring. Thus, you can add switches of ORing into the network constructed by other ring technology and enable Open-Ring to co-operate with other vendor's managed switch.

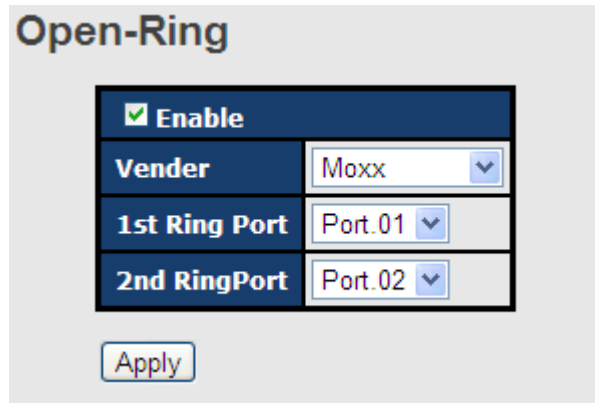

Open-Ring interface

Label	Description
Enable	Enabling the Open-Ring function
Vender	Choosing the vendors that you want to join to their ring
1 st Ring Port	Choosing the port which connect to the ring
2 nd Ring Port	Choosing the port which connect to the ring

The application of Open-Ring is shown as below.

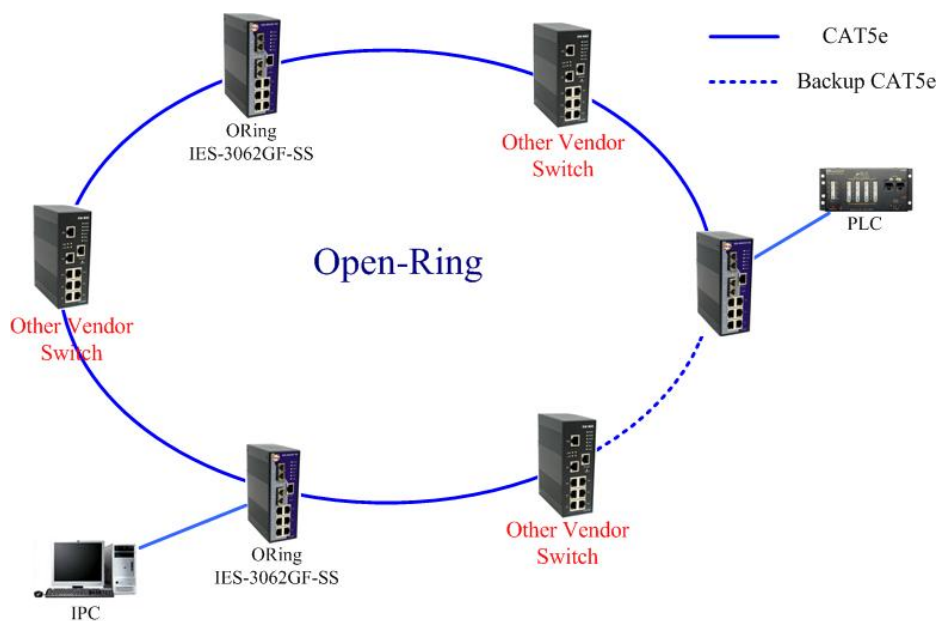

Open-Ring connection

5.1.3.5 RSTP

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol. It provides faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

RSTP setting

You can enable/disable the RSTP function, and set the parameters for each port.

RSTP - Setting

RSTP Mode :

Bridge Configuration

Priority (0-61440)	<input type="text" value="32768"/>
Max Age Time(6-40)	<input type="text" value="20"/>
Hello Time (1-10)	<input type="text" value="2"/>
Forward Delay Time (4-30)	<input type="text" value="15"/>

Port Configuration

Port	Path Cost (1-200000000)	Priority (0-240)	Admin P2P	Admin Edge	Admin Non STP
1	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>
2	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>
3	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>
4	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>
5	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>
6	<input type="text" value="200000"/>	<input type="text" value="128"/>	<input type="text" value="Auto"/>	<input type="text" value="True"/>	<input type="text" value="False"/>

RSTP Setting interface

The following table describes the labels in this screen.

Label	Description
RSTP mode	You must enable or disable RSTP function before configuring the related parameters.



Priority (0-61440)	A value used to identify the root bridge. The bridge with the lowest value has the highest priority and is selected as the root. If the value changes, you must reboot the switch. The value must be multiple of 4096 according to the protocol standard rule.
Max Age (6-40)	The number of seconds a bridge waits without receiving Spanning-tree Protocol configuration messages before attempting a reconfiguration. Enter a value between 6 through 40.
Hello Time (1-10)	The time that controls switch sends out the BPDU packet to check RSTP current status. Enter a value between 1 through 10.
Forwarding Delay Time (4-30)	The number of seconds a port waits before changing from its Rapid Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a value between 4 through 30.
Path Cost (1-200000000)	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number 1 through 200000000.
Priority (0-240)	Decide which port should be blocked by priority in LAN. Enter a number 0 through 240. The value of priority must be the multiple of 16
Admin P2P	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port concerned can only be connected to exactly one other bridge (i.e. It is served by a point-to-point LAN segment), or it can be connected to two or more bridges (i.e. It is served by a shared medium LAN segment). This function allows the P2P status of the link to be manipulated administratively. True means P2P enabling. False means P2P disabling.
Admin Edge	The port is directly connected to end stations, and it cannot create bridging loop in the network. To configure the port as an edge port, set the port to " True ".
Admin Non STP	The port includes the STP mathematic calculation. True is not including STP mathematic calculation. False is including the STP mathematic calculation.
Apply	Click " Apply " to activate the configurations.

NOTE: Follow the rule to configure the MAX Age, Hello Time, and Forward Delay Time:

$$2 \times (\text{Forward Delay Time value} - 1) \geq \text{Max Age value} \geq 2 \times (\text{Hello Time value} + 1)$$

RSTP Information

Show RSTP algorithm result at this table.

RSTP - Information

Root Bridge Information

Bridge ID	8000-001E94170067
Root Priority	32768
Root Port	Root
Root Path Cost	0
Max Age Time	20
Hello Time	2
Forward Delay Time	15

Port Information

Port	Path Cost	Port Priority	OperP2P	OperEdge	STP Neighbor	State	Role
Port.01	200000	128	True	True	False	Disabled	Disabled
Port.02	200000	128	True	True	False	Disabled	Disabled
Port.03	200000	128	True	True	False	Forwarding	Designated
Port.04	200000	128	True	True	False	Disabled	Disabled
Port.05	200000	128	True	True	False	Disabled	Disabled
Port.06	200000	128	True	True	False	Disabled	Disabled

RSTP Information interface

5.1.4 Port Configuration

5.1.4.1 Port Control

By this function, you can set the state, speed/duplex, flow control, and security of the port.

Port Control

Port No.	State	Speed/Duplex	Flow Control
Port.01	Enable	AutoNegotiation	Disable
Port.02	Enable	AutoNegotiation	Disable
Port.03	Enable	AutoNegotiation	Disable
Port.04	Enable	AutoNegotiation	Disable
Port.05	Enable	100 Full	Disable
Port.06	Enable	100 Full	Disable

Apply

Port Control interface

The following table describes the labels in this screen.

Label	Description
Port NO.	Port number for setting.
State	Enable/Disable the port.
Speed/Duplex	You can set Auto-negotiation, 100 full,100 half,10 full,10 half mode.
Flow Control	Support symmetric and asymmetric mode to avoid packet loss when congestion occurred.
Apply	Click " Apply " to activate the configurations.

5.1.4.2 Port Status

The following information provides the current port status.

Port Status

Port No.	Type	Link	State	Speed/Duplex	Flow Control
Port.01	100TX	Down	Enable	N/A	N/A
Port.02	100TX	Down	Enable	N/A	N/A
Port.03	100TX	UP	Enable	100 Full	Disable
Port.04	100TX	Down	Enable	N/A	N/A
Port.05	100SFP	Down	Enable	N/A	N/A
Port.06	100SFP	Down	Enable	N/A	N/A

Port Status interface

5.1.4.3 Port Alias

The user can define the name of every Port. User can be convenient management every Port.

Port Alias

Port No.	Port Alias
Port.01	test port
Port.02	monitor port
Port.03	
Port.04	
Port.05	
Port.06	

5.1.5 VLAN

A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain, which allows you to isolate network traffic. Only the members of the VLAN will receive traffic from the same members of VLAN. Basically, creating a VLAN from a switch is logically equivalent of reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plugged into the same switch physically. The switch supports port-based VLAN only.

5.1.5.1 VLAN Configuration – Port Based

Traffic is forwarded to the member ports of the same vlan group. vlan port based startup, set in the same group of the port, can be a normal transmission packet, without restricting the types of packets.

Port-Based VLAN

	Port.01	Port.02	Port.03	Port.04	Port.05	Port.06
Group.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Group.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

VLAN Configuration – Port Based VLAN interface

The following table describes the labels in this screen.


Label	Description
Group	Mark the blank to assign the port into VLAN group.
Apply	Click " Apply " to activate the configurations.
Help	Show help file.

5.1.6 SNMP Configuration

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.

5.1.6.1 SNMP – Agent Setting

You can set SNMP agent related information by Agent Setting Function.

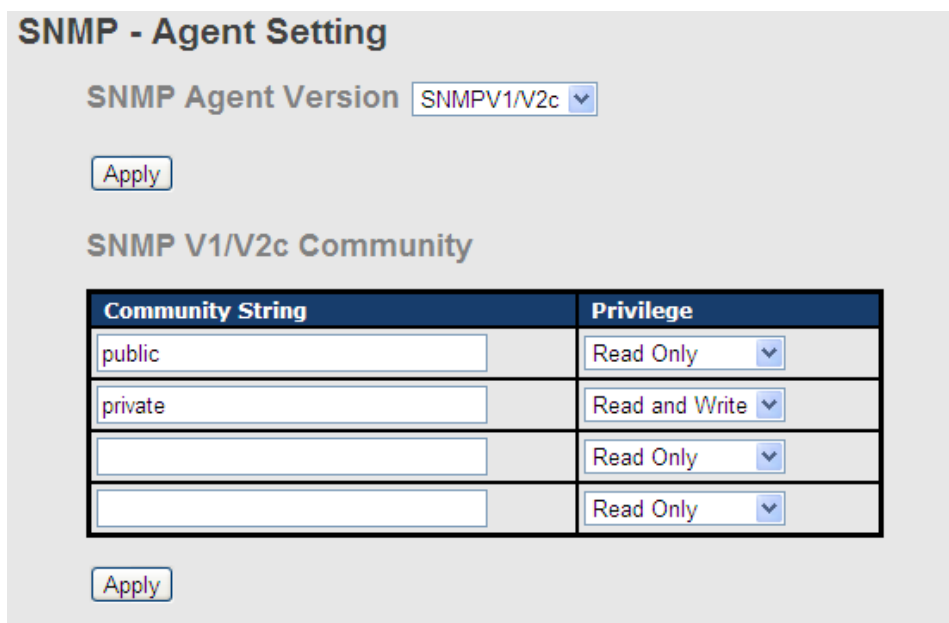

SNMP - Agent Setting

SNMP Agent Version

SNMP V1/V2c Community

Community String	Privilege
<input type="text" value="public"/>	<input type="text" value="Read Only"/>
<input type="text" value="private"/>	<input type="text" value="Read and Write"/>
<input type="text"/>	<input type="text" value="Read Only"/>
<input type="text"/>	<input type="text" value="Read Only"/>


SNMP – Agent Setting interface

The following table describes the labels in this screen.

Label	Description
SNMP – Agent Setting	SNMP Community should be set for SNMP. Four sets of "Community String/Privilege" are supported. Each Community String is maximum 32 characters. Keep empty to remove this Community string.

5.1.6.2 SNMP –Trap Setting

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps will issue. Create a trap manager by entering the IP address of the station and a community string. To define management stations as trap manager and enter SNMP community strings and selects the SNMP version.

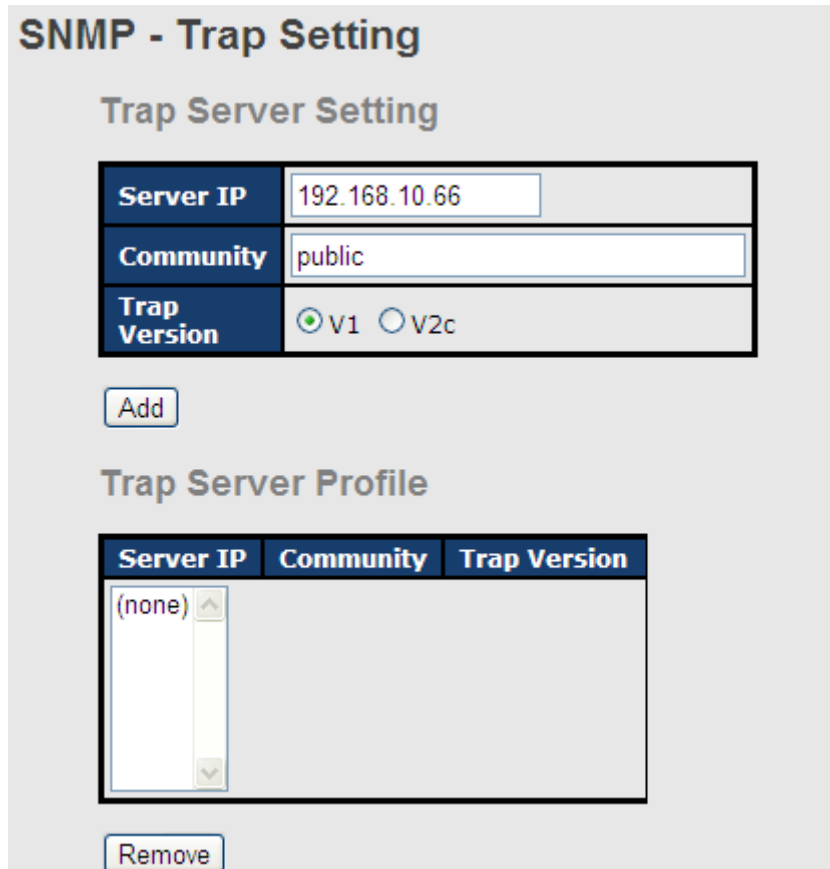

The screenshot shows the 'SNMP - Trap Setting' interface. It is divided into two main sections: 'Trap Server Setting' and 'Trap Server Profile'.

Trap Server Setting: This section contains three input fields:

- Server IP:** A text box containing the IP address '192.168.10.66'.
- Community:** A text box containing the community string 'public'.
- Trap Version:** A radio button selection area with 'V1' selected (indicated by a green dot) and 'V2c' unselected.

 Below these fields is an 'Add' button.

Trap Server Profile: This section features a table with three columns: 'Server IP', 'Community', and 'Trap Version'. The 'Server IP' column contains a dropdown menu currently showing '(none)'. Below the table is a 'Remove' button.

SNMP –Trap Setting interface

The following table describes the labels in this screen.

Label	Description
Server IP	The server IP address to receive Trap
Community	Community for authentication
Trap Version	Trap Version supports V1 and V2c.
Add	Add trap server profile.
Remove	Remove trap server profile.
Help	Show help file.



5.1.6.3 SNMP – SNMP-V3 Setting

SNMP - SNMPv3 Setting

SNMPv3 Engine ID: f46500003001e94170067

Context Table

Context Name :	<input type="text"/>	<input type="button" value="Apply"/>
----------------	----------------------	--------------------------------------

User Table

Current User Profiles : <input type="button" value="Remove"/>	New User Profile : <input type="button" value="Add"/>
<input type="text" value="(none)"/>	User ID: <input type="text"/>
	Authentication Password: <input type="text"/>
	Privacy Password: <input type="text"/>

Group Table

Current Group content : <input type="button" value="Remove"/>	New Group Table: <input type="button" value="Add"/>
<input type="text" value="(none)"/>	Security Name (User ID): <input type="text"/>
	Group Name: <input type="text"/>

Access Table

Current Access Tables : <input type="button" value="Remove"/>	New Access Table : <input type="button" value="Add"/>
<input type="text" value="(none)"/>	Context Prefix: <input type="text"/>
	Group Name: <input type="text"/>
	Security Level: <input type="radio"/> NoAuthNoPriv. <input type="radio"/> AuthNoPriv. <input type="radio"/> AuthPriv.
	Context Match Rule <input type="radio"/> Exact <input type="radio"/> Prefix
	Read View Name: <input type="text"/>
	Write View Name: <input type="text"/>
	Notify View Name: <input type="text"/>

MIBView Table

Current MIBTables : <input type="button" value="Remove"/>	New MIBView Table : <input type="button" value="Add"/>
<input type="text" value="(none)"/>	View Name: <input type="text"/>
	SubOid-Tree: <input type="text"/>
	Type: <input type="radio"/> Excluded <input type="radio"/> Included



The following table describes the labels in this screen

Label	Description
Context Table	Configure SNMP v3 context table. Assign the context name of context table. Click "Apply" to change context name
User Table	<ol style="list-style-type: none">1. Configure SNMP v3 user table.2. User ID: set up the user name.3. Authentication Password: set up the authentication password.4. Privacy Password: set up the private password.5. Click "Add" to add context name.6. Click "Remove" to remove unwanted context name.
Group Table	<ol style="list-style-type: none">1. Configure SNMP v3 group table.2. Security Name (User ID): assign the user name that you have set up in user table.3. Group Name: set up the group name.4. Click "Add" to add context name.5. Click "Remove" to remove unwanted context name.
Access Table	<ol style="list-style-type: none">1. Configure SNMP v3 access table.2. Context Prefix: set up the context name.3. Group Name: set up the group.4. Security Level: select the access level.5. Context Match Rule: select the context match rule.6. Read View Name: set up the read view.7. Write View Name: set up the write view.8. Notify View Name: set up the notify view.9. Click "Add" to add context name.10. Click "Remove" to remove unwanted context name.
MIBview Table	<ol style="list-style-type: none">1. Configure MIB view table.2. ViewName: set up the name.3. Sub-Oid Tree: fill the Sub OID.4. Type: select the type – exclude or included.5. Click "Add" to add context name.6. Click "Remove" to remove unwanted context name.
Help	Show help file.


5.1.7 System Warning

Warning function is very important for managing switch. You can manage switch by SYSLOG, E-MAIL, and Fault Relay. It helps you to monitor the switch status on remote site. When events occurred, the warning message will send to your appointed server, E-MAIL, or relay fault to switch panel.

5.1.7.1 Syslog Setting

The SYSLOG is a protocol to transmit event notification messages across networks.

Please refer to RFC 3164 - The BSD SYSLOG Protocol

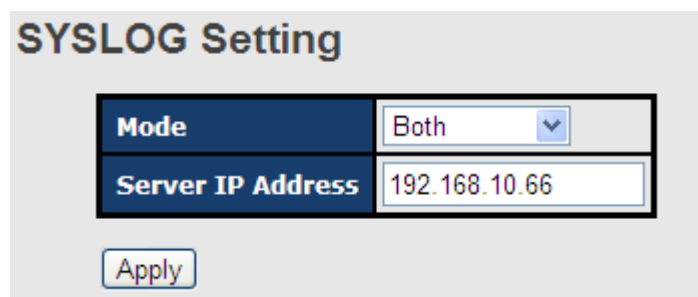


System Warning – SYSLOG Setting interface

The following table describes the labels in this screen.

Label	Description
SYSLOG Mode	<ul style="list-style-type: none"> ■ Disable: disable SYSLOG. ■ Client Only: log to local system. ■ Server Only: log to a remote SYSLOG server. ■ Both: log to both of local and remote server.
SYSLOG Server IP Address	The remote SYSLOG Server IP address.
Apply	Click " Apply " to activate the configurations.
Help	Show help file.

5.1.7.2 System Event Log

If system log client is enabled, the system event logs will show in this table.

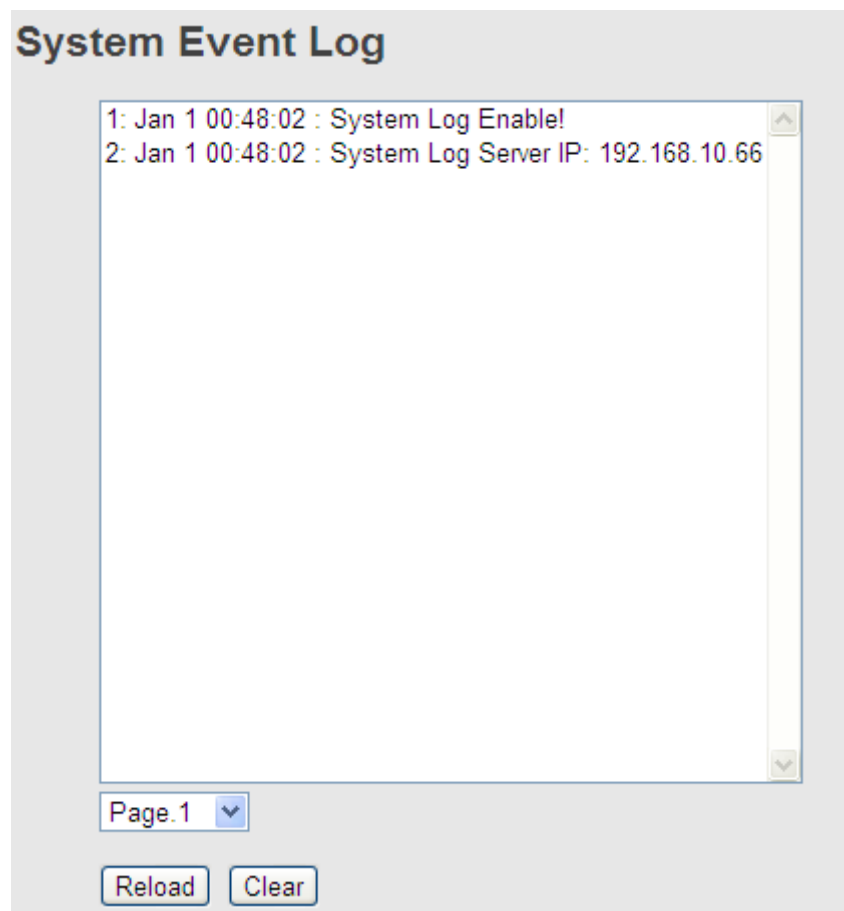

System event log interface

The following table describes the labels in this screen.

Label	Description
Page	Select LOG page.
Reload	To get the newest event logs and refresh this page.
Clear	Clear log.
Help	Show help file.

5.1.7.3 SMTP Setting

The SMTP is Short for Simple Mail Transfer Protocol. It is a protocol for e-mail transmission across the Internet. Please refer to RFC 821 - Simple Mail Transfer Protocol.

SMTP Setting

E-mail Alert :

SMTP Configuration

SMTP Server IP Address	<input type="text" value="192.168.10.66"/>
Sender E-mail Address	<input type="text" value="admin"/>
Mail Subject	<input type="text" value="Automated Email Alert"/>
<input type="checkbox"/> Authentication	
Recipient E-mail Address 1	<input type="text" value="test@192.168.10.66"/>
Recipient E-mail Address 2	<input type="text"/>
Recipient E-mail Address 3	<input type="text"/>
Recipient E-mail Address 4	<input type="text"/>

System Warning – SMTP Setting interface

The following table describes the labels in this screen.

Label	Description
E-mail Alarm	Enable/Disable transmission system warning events by e-mail.
Sender E-mail Address	The SMTP server IP address
Mail Subject	The Subject of the mail
Authentication	<ul style="list-style-type: none"> ■ Username: the authentication username. ■ Password: the authentication password. ■ Confirm Password: re-enter password.
Recipient E-mail Address	The recipient's E-mail address. It supports up to 6 recipients per mail.
Apply	Click " Apply " to activate the configurations.
Help	Show help file.

5.1.7.4 Event Selection

SYSLOG and SMTP are the two warning methods that supported by the system. Check the corresponding box to enable system event warning method you wish to choose.

Please note that the checkbox can not be checked when SYSLOG or SMTP is disabled.

Event Selection

System Event

Event	SYSLOG	SMTP
System Restart	<input type="checkbox"/>	<input checked="" type="checkbox"/>
O-Ring Topology Change	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Port Event

Port No.	SYSLOG	SMTP
Port.01	Link Up & Link Down ▾	Disable ▾
Port.02	Disable ▾	Disable ▾
Port.03	Link Up & Link Down ▾	Disable ▾
Port.04	Disable ▾	Link Up & Link Down ▾
Port.05	Disable ▾	Disable ▾
Port.06	Disable ▾	Link Up & Link Down ▾


System Warning – Event Selection interface

The following table describes the labels in this screen.

Label	Description
System Event	
System Cold Start	Alert when system restart
O-Ring Topology Change	Alert when O-Ring topology change
Port Event	<ul style="list-style-type: none"> ■ Disable ■ Link Up ■ Link Down ■ Link Up & Link Down
Apply	Click " Apply " to activate the configurations.
Help	Show help file.

5.1.7.5 Fault Relay Alarm

When any selected fault event is happened, the Fault LED in switch panel will light up and the electric relay will signal at the same time.

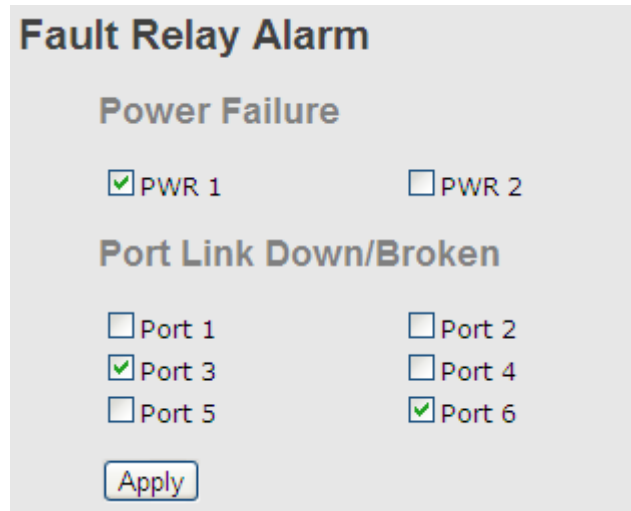


Fault alarm interface

5.1.8 Power Over Ethernet (P.O.E.)

5.1.8.1 Basic Setting

The following interface is the PoE setting interface. There are 4 ports (port 1 to port 4) act as PSE (Power Supply Equipment) ports.

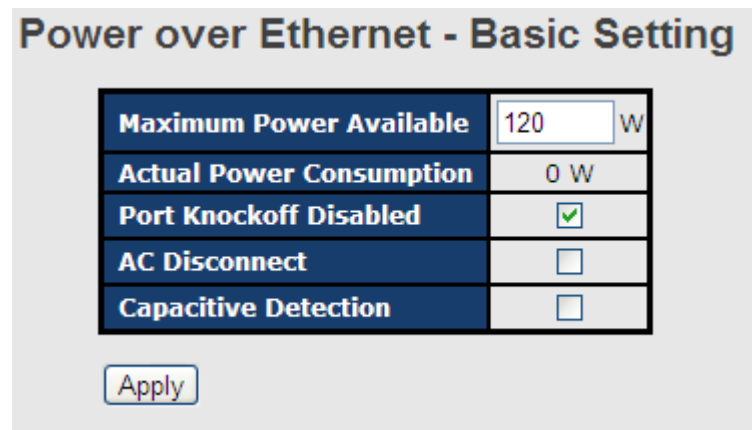

Label	Description
Maximum Power Available	Display the maximum power available.
Actual Power Consumption	Display the actual power consumption.
Pork Knockoff	Mark the blank to enable "Pork Knock off Disabled" function.

Disabled	
AC Disconnect	Mark the blank to enable " AC Disconnect " function.
Capacitive Detection	Mark the blank to enable " Capacitive Detection " function

5.1.8.2 Port Setting

The following interface is the PoE setting interface. There are 4 ports (port 1 to port 4) act as PSE (Power Supply Equipment) ports.

Power over Ethernet - Port Setting

Port No.	State	Power Limit From Classification	Legacy	Priority	Power Limit (<25000)(mW)
Port.01	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400
Port.02	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400
Port.03	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400
Port.04	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400

Label	Description
Port	Port number.
Enable state	Mark the blank to enable P.O.E. function for specific ports
Power Limit From Classification	Set the " Power Limit From Classification " function for each P.O.E. ports
Legacy	The legacy detection is to identify the PD devices that did not follow the IEEE 802.3af standard their unique electrical signatures in order for the PoE switch can provide the power to those PD devices
Priority	Set port priority for the P.O.E. power management. 1 = C (critical), 2 = H (High), 3 = L (Low)
Power Limit	Set the power limit value. The maximum value must less 15400

5.1.8.3 Port Status

Show P.O.E each Port, the situation in detail.

Power over Ethernet - Port Status

Port No.	Link	State	Current (mA)	Voltage (V)	Power (mW)	Determined Class
Port.01	Down	Detecting	0	0.0	0	0:15.4W
Port.02	Down	n/a	0	0.0	0	0:15.4W
Port.03	Down	Detecting	0	0.0	0	0:15.4W
Port.04	Down	Detecting	0	0.0	0	0:15.4W

Label	Description
Port	Port number.
Link	P.S.E Function Port Link or Down
State	Show P.S.E Status.
Power Limit From Classification	Set the "Power Limit From Classification" function for each P.O.E. ports
Current(mA)	Display current value
Voltage(V)	Display voltage value
Power(mW)	Display watt value
Determined Class	Display power class. When the Bypass classification enable, the class value will not show in here

5.1.8.4 Boot Delay

Start Delay enable feature, users can define their own time for POE power supply.

Power over Ethernet - Boot Delay

Port No.	Delay Mode	Delay Time(0~300)
Port.01	Enable ▾	0 Second(s)
Port.02	Disable ▾	0 Second(s)
Port.03	Disable ▾	0 Second(s)
Port.04	Disable ▾	0 Second(s)

Apply

Label	Description
Port	Port number.
Delay Mode	Enable or disable Delay Mode
Delay Time(0-300)	Time to provide power

5.1.8.5 Ping Alive Check

You can control the POE function by using the ping command , in order to turn on or off other POE device which connect with port assign.

Ping Alive Check

Ping Check: ▾

Send Mail: ▾

Port No.	Ping IP Address	Interval Time (10~120) seconds	Retry Time (1~5)	Failure Log	Failure Action	Reboot Time (3~120) seconds
Port.01	<input type="text" value="192.168.10.1"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="button" value="Restart Forever"/> ▾	<input type="text" value="15"/>
Port.02	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="button" value="Nothing"/> ▾	<input type="text" value="15"/>
Port.03	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="button" value="Nothing"/> ▾	<input type="text" value="15"/>
Port.04	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="button" value="Nothing"/> ▾	<input type="text" value="15"/>

The following table describes the labels in this screen.

Label	Description
Ping Check	Enable or disable Ping Check function
Send Mail	When " ping " fails,can notify users by mail
Port	You can appoint to want to control P.O.E port number
Ping IP Address	Set up ip Address
Interval Time	Spacing interval to set up Ping(10 Sec~120 Sec)
Retry Time	Set up the number of times of ping
Failure Log	Note down " Ping Check " a result of movement after starting.
Failure Action	Set up movements wanted to carry out
Reboot Time	Switch ping check failure " P.O.E " restarts the buffer time of switch.

5.1.8.6 Scheduling

User can appointed date and time, Enable or Close Power Over Ethernet Function, switch can with according to the time when is set up, carry on the designated movements (SNTP Function must Enable)

Power over Ethernet - Scheduling

Schedule on ▼

Schedule mode ▼

Select all

Hour	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
01	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
02	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
03	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
04	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
05	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
06	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
07	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
08	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
09	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

The following table describes the labels in this screen.

Label	Description
Schedule on	Setting action port
Schedule mode	Schedule mode enable or disable
Select all	Select all Data & Time
Hour	Set up enable Time
Sunday~Saturday	Set up enable Data

5.1.9 Save Configuration

If any configuration changed, “**Save Configuration**” should be clicked to save current configuration data into the permanent flash memory. Otherwise, the current configuration will be lost when power off or system reset.




System Configuration interface

The following table describes the labels in this screen.

Label	Description
Save	Save all configurations.
Help	Show help file.


5.1.10 Factory Default

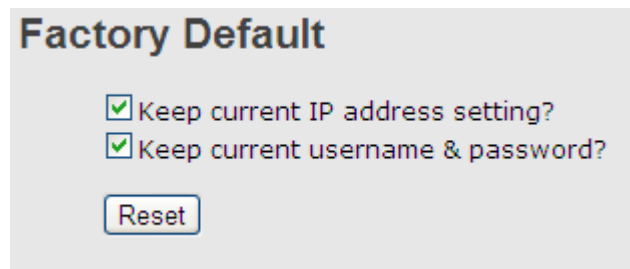

Factory Default interface

Reset switch to default configuration. Click **Reset** to reset all configurations to the default value. You can select “**Keep current IP address setting**” and “**Keep current username & password**” to prevent IP and username & password from default.

5.1.11 System Reboot

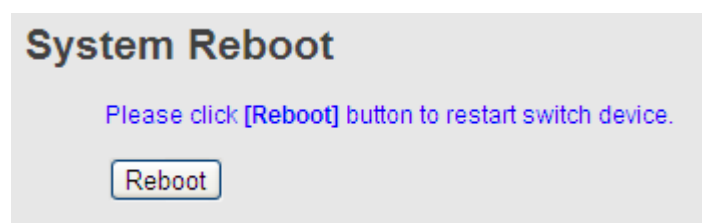

System Reboot interface



Technical Specifications

ORing Switch Model	IPS-2042TX	IPS-2042FX-MM-SC	IPS-2042FX-SS-SC
Physical Ports			
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX with P.S.E.	4	4	4
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX without P.S.E.	2		
Fiber Ports Specification	Fiber Ports Number	2	2
	Fiber Ports Standard	100Base-FX	100Base-FX
	Fiber Mode	Multi-mode	Single-mode
	Fiber Diameter (µm)	62.5/125 µm 50/125 µm	9/125 µm
	Fiber Optical Connector	SC	SC
	Typical Distance (Km)	2 Km	30 Km
	Wavelength (nm)	1310 nm	1310 nm
	Max. Output Optical Power (dbm)	-14 dbm	-8 dbm
	Min. Output Optical Power (dbm)	-23.5 dbm	-15 dbm
	Max. Input Optical Power (Saturation)	0 dbm	0 dbm
	Min. Input Optical Power (Sensitivity)	-31 dbm	-34 dbm
	Link Budget (db)	7.5 db	19 db
Technology			
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3x for Flow control IEEE 802.1D for STP (Spanning Tree Protocol) IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3af PoE specification (up to 25 Watts per port for P.S.E.)		
MAC Table	2048 MAC addresses		
Priority Queues	4		
Processing	Store-and-Forward		
Switch Properties	Switching bandwidth: 1.2Gbps VLAN: Port Based		
Security Features	Enable/disable ports VLAN to segregate and secure network traffic		
Software Features	STP/RSTP (IEEE 802.1D/w) Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units Open-Ring support the other vendor's ring technology in open architecture Port configuration, status, statistics, monitoring, security DHCP Client		
Network Redundancy	O-Ring Open-Ring O-Chain Fast recovery STP RSTP		
LED Indicators			
Power/PoE Indicator	Green : Power LED x 3. Green : PoE LED x 4		
R.M. Indicator	Green : Indicate system operated in O-Ring Master mode		
O-Ring Indicator	Green : Indicate system operated in O-Ring mode		
Fault Indicator	Amber : Indicate unexpected event occurred		
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/Act. Amber for Link		



Fiber Port Indicator	Green for port Link/Act. Amber for Link		
Fault contact			
Relay	Relay output to carry capacity of 1A at 24VDC		
Power			
Redundant Input Power	Triple DC inputs. 2x48VDC on 7-pin terminal block, 1x48VDC on power jack		
Power Consumption (Typ.)	5 Watts	7 Watts	7 Watts
Overload Current Protection	Present		
Reverse Polarity Protection	Present on terminal block		
Physical Characteristic			
Enclosure	IP-30		
Dimension (W x D x H)	52(W) x 106.1(D) x 144.3(H) mm (2.05x4.18x5.68 inch.)		
Weight (g)	696 g	709 g	709 g
Environmental			
Storage Temperature	-40 to 85°C (-40 to 185°F)		
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Operating Humidity	5% to 95% Non-condensing		
Regulatory approvals			
EMI	FCC Part 15, CISPR (EN55022) class A		
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11		
Shock	IEC60068-2-27		
Free Fall	IEC60068-2-32		
Vibration	IEC60068-2-6		
Safety	EN60950-1		
MTBF	304,333 hours	292,673 hours	
Warranty	5 years		

ORing Switch Model	IPS-2042P
Physical Ports	
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX with P.S.E.	4
100Base-FX SFP Ports	2
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T, IEEE 802.3u for 100Base-T(X) and 100Base-FX, IEEE 802.3x for Flow control IEEE 802.1D for STP (Spanning Tree Protocol) IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3af PoE specification (up to 25 Watts per port for P.S.E.)
MAC Table	2048 MAC addresses
Priority Queues	4
Processing	Store-and-Forward
Switch Properties	Switching bandwidth: 1.2Gbps VLAN: Port Based
Security Features	Enable/disable ports VLAN to segregate and secure network traffic



	SNMPv3 encrypted authentication and access security
Software Features	STP/RSTP (IEEE 802.1D/w) Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units Open-Ring support the other vendor's ring technology in open architecture Port configuration, status, statistics, monitoring, security DHCP Client
Network Redundancy	O-Ring Open-Ring O-Chain Fast recovery STP RSTP
LED indicators	
Power/PoE Indicator	Green : Power LED x 3. Green : PoE LED x 4
R.M. Indicator	Green : Indicate system operated in O-Ring Master mode
O-Ring Indicator	Green : Indicate system operated in O-Ring mode
Fault Indicator	Amber : Indicate unexpected event occurred
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/Act. Amber for Link
SFP Socket Indicator	Green for port Link/Act.
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Redundant Input Power	Triple DC inputs. 2x48VDC on 7-pin terminal block, 1x48VDC on power jack
Power Consumption (Typ.)	7 Watts Max.
Overload Current Protection	Present
Reverse Polarity Protection	Present on terminal block
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	54.2(W)x106.1(D)x145.4(H) mm (2.13x4.18x5.72 inch.)
Weight (g)	700g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Warranty	5 years