

NS-205F/NSM-205F Series

Unmanaged 4-Port Industrial 10/100 Base-TX with 100 Base-FX Fiber Switch

Highlight Information NS-205F/NSM-205F Series NSM-205F Series NS-205F Series (ϵ) FC Fiber +70Optic ĺ LAN x4 x1 For NSM-205F Series Wall & Alarm DIN-Rail Contact Mount í. For NS-205F Series DIN-Rail Mount 000

Introduction

The NS-205F/NSM-205F series is a Unmanaged 4-Port Industrial Ethernet (10/100 Base-TX) to Fiber Port (100 Base-FX) switch that secures data transmission by using fiber optic transmission to provide immunity from EMI/RFI interference. It is used Ethernet for transmitting a signal up to 40 km, and is the perfect solution for applications where transmission must be protected from electrical exposure, surges, lightning or chemical corrosion.

The Ethernet supports 10/100M auto negotiation feature and auto MDI/MDI-X function.

Features

- Automatic MDI/MDI-X crossover for plug-and-play
- Each port supports both 10/100 Mbps speed auto negotiation
- Store-and-forward architecture
- Full duplex IEEE 802.3x and half duplex backpressure flow control
- 3.2 Gbps high performance memory bandwidth
- Frame buffer memory: 512 Kbit
- Integrated look-up engine with dedicated 1024 unicast MAC addresses
- Supports +10 V_{DC} ~ +30 V_{DC}
- Supports operating temperatures from 0 °C ~ +70 °C

Specifications

Models	NS-205F Series	NSM-205F Series		
Technology				
Standards	IEEE 802.3, 802.3u, 802.3x			
Processing Type	Store & forward, wire speed switching			
MAC Addresses	1024			
Memory Bandwidth	3.2 Gbps			
Frame Buffer Memory	512 Kbit			
Flow Control	IEEE 802.3x flow control, back pressure flow control			
Interface				
RJ-45 Ports	10/100 Base-TX auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection			
Fiber Optics Port	100 Base-FX			
LED Indicators	10/100M, Link/Act, Full duplex/Half duplex (Fiber Port)			
Ethernet Isolation	1500 V _{rms} 1 minute			
Frame Ground for EMS Protection	Yes			
	Multi Mode Fiber Cables: 50/125, 62	.5/125 or 100/140 μm		
	Distance: 2 km, (62.5/125 µm recommended) for full duplex			
	Wavelength: 1300 or 1310 nm			
Multi Mode	Min. TX Output: -20 dBm			
	Max. TX Output: -14 dBm			
	RX Sensitivity: -34 ~ -31 dBm			
	Single Mode Fiber Cables: 8.3/125, 8	3.7/125, 9/125 or 10/125 μm		
	Distance: 15 km, (9/125 µm recommended) for full duplex			
Circula Mada	Wavelength: 1300 or 1310 nm			
Single Mode	Min. TX Output: -15 dBm			
	Max. TX Output: -8 dBm			
	RX Sensitivity: -36 ~ -31 dBm			
Ethernet Transmission Distance	Ethernet: 2-pair UTP/STP Cat.3, 4, 5, EIA/TIA-568 100 Ω			
Ethernet Transmission Distance	Fast Ethernet: 2-pair UTP/STP Cat. 5, EIA/TIA-568 100 Ω			
Power				
Input Voltage Range	+10 V_{DC} ~ +30 V_{DC} (Non-isolation)	+10 $V_{DC} \sim$ +30 V_{DC} (Non-isolation) Redundant Inputs		
Power Consumption	0.14 A @ 24 V _{DC} , +/-5% arrowed wi	th 100M Full duplex		
LED Indicator	Yes			
Protection	Power reverse polarity protection			
Frame Ground for EMS Protection	Yes			
Mechanical				
Casing	Plastic (Flammability UL 94V-0)	Metal (IP20 Protection)		
Dimensions (W x L x H)	64 mm x 101 mm x 118 mm	73 mm x 105 mm x 132 mm		
Installation	DIN-Rail	DIN-Rail or Wall Mounting		
Environmental	• 			
Operating Temperature	0 °C ~ +70 °C			
Storage Temperature	-20 °C ~ +85 °C			
Ambient Relative Humidity	10% ~ 90% RH, non-condensing			



• LED Functions


NSM-205F Series LED Indicator Functions				
LED	Color	Description		
	Red On	Core Power is OK		
PWR_OK	Red Off	Core Power is Off		
Full for P0		Full Duplex		
		Half Duplex		
Link for P0	Green On			
		Not Networking		
	Yellow On	Link/Act		
Ethernet Port	Yellow Off	Not Networking		
(P1 ~ P4)		Link to 100 Mbps		
	Green Off	Link to 10 Mbps		
	Green On	Power is being supplied to power input PWR2		
PWR2 PWR1 FAULT	Green Off	Power is not being supplied to power input PWR2		
	Yellow On	Power is being supplied to power input PWR1		
	Yellow Off	Power is not being supplied to power input PWR1		
	Red On	Power is not being supplied to power input PWR1 and PWR2		
	Red Off	Power is being supplied to power input PWR1 and PWR2		

ALLED LARGE


• Redundant Power Inputs


Both power inputs can be connected simultaneously to live DC power sources.

If one power source fails, the other live source acts as a backup, and automatically supplies all of NSM-205F series power needs.










NS-205F Series LED Indicator Functions			
LED	Color	Description	
Power	Red On	Power is On	
	Red Off	Power is Off	
Fiber Port (P0)	Yellow On	Full Duplex Mode	
	Yellow Off	Half Duplex Mode	
	Green On	Link/Act	
	Green Off	Not Networking	
Ethernet Port (P1 ~ P4)	Yellow On	Link/Act	
	Yellow Off	Not Networking	
	Green On	Link to 100 Mbps	
	Green Off	Link to 10 Mbps	

High Reliability Industrial Ethernet Switch for Rugged Environment

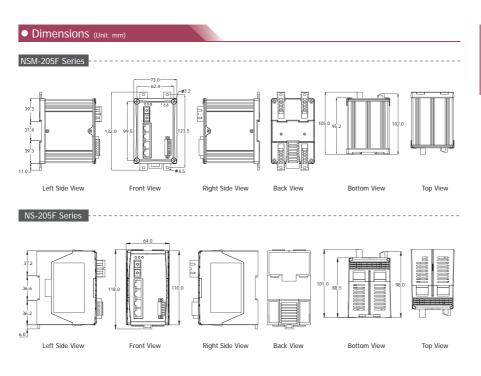

• Ordering Information

M: Metal A:	NS M -205 A F Power Input +12 Vpc ~ +48 Vpc	- 4 0 - Single Mode Distance 40: 40 km Standard Models: 15 km
	Fiber Port Connector	Operating Temperature
Ordering Code Definition	T: Multi Mode ST Connector C: Multi Mode SC Connector CS: Single Mode SC Connector	T: Operating Temp: -40 °C ~ +75 °C Standard Models: 0 °C ~ +70 °C
Models	NS-205FT, NSM-205FT NS-205FC, NSM-205FC NS-205FCS, NSM-205FCS NS-205AFT, NSM-205AFT NS-205AFC, NSM-205AFC NS-205AFCS, NSM-205AFCS	NS-205AFT-T, NSM-205AFT-T NS-205AFC-T, NSM-205AFC-T NS-205AFCS-T, NSM-205AFCS-T NS-205AFCS-40T, NSM-205AFCS-40T

Accessories

GPSU06-6	24V/0.25A, 6 W Power Supply
KWM020-1824F	24V/0.75A, 18 W Power Supply
DIN-KA52F	24V/1.04A, 25 W Power Supply with DIN-Rail Mounting