# **IBS-19A Series**

#### 19" Medical Panel PC features Intel® Core™ i5/i3 Processor



#### Features

- Best price and high-performance Intel® Core™ i5/i3 processor
- Easy cleaning and maintenance in Medical environment
- Feature-rich bedside applications for patients
- Professional point-of-care features for clinician
- Innovative LED dash light system for efficient visual management
- Easy installation with flexible mounting and cabling



## Specifications

IEIMobile Solutions

Automation Panel Solutions

3 PACSmat Medica Solution

Optional Peripherals

Model		IBS-19A			
СРИ		Intel® Core™ i5 - 2390T 2.7GHz			
		Intel® Core™ i3 - 21xxT above 2.5GHz			
		Intel® Pentium® - G6xxT above 2.2GHz			
Chipset		Intel® H61 Express Chipset			
RAM Slot		Two DDR3 1333MHz SDRAM SO-DIMMs			
KAW SIOL		System max. 4GB			
	LCD Size	19"			
	Resolution	1280 x 1024			
	Brightness (nits)	300			
	Backlight	LED			
	Contrast Ratio	2000			
	Viewing Angle	89/89/89			
Display	Operation Lifetime (Hrs)	50000			
		Grayscale Mode - DICOM GSDF Clear Base 6500K			
		Grayscale Mode - DICOM GSDF Blue Base 9300K			
	Gamma Table	Color Mode - Gamma 2.2 6500K			
		Color Mode - DICOM GSDF Clear Base 6500K			
		Color Mode - Gamma 2.2 9300K			
Touch Ormon		Color Mode - DICOM GSDF Blue Base 9300K			
Touch Screen		5-wire resistive type			
Wireless	Wi-Fi HDD	802.11a/b/g/n dual-band 2.4Ghz/5Ghz			
Drive Bay	ODD	1 x 2.5" SATA HDD 1 x Slim DVD RW 24x			
		1 x External power switch connector	1 x USB 2.0		
	Backward I/O Set	1 x RS-422/485	1 x GbE LAN RJ-45		
		1 x RS-232	1 x Mic-in		
I/O Ports	Downward I/O Set	2 x RJ-45 GbE LAN	1 x Line-out		
	Downward I/O Set	1 x HDMI	1 x AT/ATX Switch		
		2 x USB 2.0	1 x Reset Button		
	Webcam	1280 x 1024 CMOS camera			
	Microphone	Stereo			
Audio/Video	Speakers	2 x 3W			
	Handset	Optional handset with speaker and microhpne			
	Digital TV Tuner	Optional DVB-T by project case			
LED Deeb Liebt	Upper Left	26 x true color LED 20 x true color LED			
LED Dash Light	Right	20 x true color LED			
	Right	6-key touch sensor pad			
OSD Key		Programmable Fn key			
RFID		Optional Mifare 13.56Mhz RFID reader			
Smart Card Reader		Optional ISO7816-1,2,3 card reader			
Remote control		Infrared remote control for display OSD			
	DC Input	9~28 V DC			
Power	External Adaptar	130W 90~264 V@AC to 12V@DC			
IP Level	Front Panel	IP 64			
Environmental		0.0 10.0			
Condition	Operating Temp.	0°C ~ 40°C			

ICP Deutschland GmbH | +49(0)7121-14323-20 | sales@icp-deutschland.de | www.icp-deutschland.de

## Bedside Infotainment + Point of Care = Interactive Bedside Station

PACSmate Interactive Beside Station IBS series is designed to improve both patient experiences and clinical efficiency with unique features. The combination of high performance computing capability and the unique LED dash light design offers the hospitals with endless possibilities in bedside entertainment, patient care and clinical management.

#### **Patient Experiences**

#### VoIP phone

- Video conference
- Internet access
- Movie and music on demand
- Gaming
- DVB-T digital TV
- Nursing call
- Service ordering
  Patient education
- Patient education
- Billing and payment
- Illumination LED reading light
- Infrared remote control

#### **Clinical Efficiency**

- Visual notification by the LED dash light
- DICOM GSDF conformance for referral medical
- imaging
- Smart card and RFID integration
  WLAN and Ethernet connection
- 3.5G HSPDA connection
- Patient education
- Medicine identification by RFID
- Nursing call
- Hospital information system



## ■ High Performance Intel® H61 Chipset & 2nd Generation Intel® Core™ i Processor up to 2.7GHz

acsm

#### 2nd Generation Intel® Core™ Processors

- Core™ i5 2390T 2.7GHz
- Core™ i3 21xxT above 2.5GHz
- Pentium® G6xxT above 2.2GHz
- Intel® HD Graphics 2000 Processor Graphic
- Support DDR3 -1333 MHz

# **Easy Cleaning and Maintenance**

#### Seamless front panel design

The seamless front panel design provides IP 65 rating for easy cleaning.

#### Anti-bacteria housing

The plastic housing contains anti-bacteria material to reduce the living bacteria on the surface.

#### Front smart card reader •

The front smart card reader with 45 degree insert angle prevents penetration of any liquid drops

#### **Touch Function Keys**

Touch pad function keys with auto-dimming LED light are all programmable.



#### **System Status Indicators**

The easy-reading LED lights indicating various system status allows the operators to monitor the system status anytime.



#### Seamless 5-wire resistive touchscreen

The seamless 5-wire resistive is durable for cleaning with alcohol.

#### **ODD** cover

The built-in optical drive is equipped with IP 32 cover.

#### **Front USB ports**

The two front USB ports with 45 degree insert angle prevents penetration of any liquid drops

#### LED Reading Light


The high-bright ness LED reading light with luminance control button provides illumination in dark area.







# Feature-rich Bedside Applications

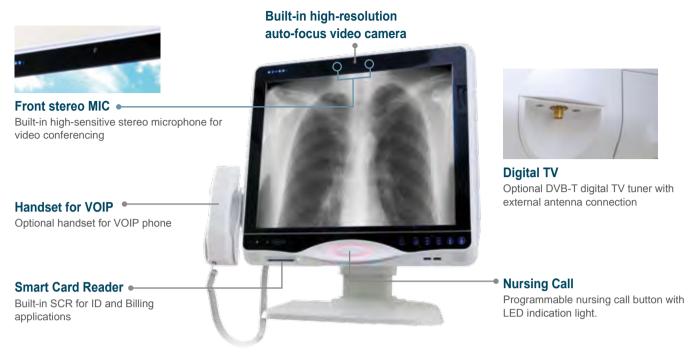

# Medical Imaging - DICOM Compliant

The IBS-19A featuring wide viewing angle LCD with LED backlight is a combination of a profession display and a high-performance PC with DICOM GSDF calibration for grayscale images and with various gamma settings for color images.

### **Calibrated DICOM / Gamma**

#### **Color Mode**

- DICOM GSDF Clear Base 6500K
- DICOM GSDF Blue Base 9300K
- Gamma 2.2 6500K
- Gamma 2.2 9300K



178°

#### **Pure Grayscale Mode**

DICOM GSDF Clear Base 6500K
 DICOM GSDF Blue Base 9300K



LCD Size	19"
Resolution	1280 x 1024
Brightness	300 nits
Optional High-Brightness	600 nits
Backlight	LED
Contrast Ratio	2000:01:00
Viewing Angle	89/89/89/89
Surface Treatment	Anti-Glare
Operation Life (Hrs)	50000

# Wi-Fi 3T3R Wireless LAN

178°

Wide-Viewing Angle PMVA LCD Display

The IBS-19A integrates a 3T3R 802.11/a/b/g/n dual-band WLAN to ensure the highest data transmission rate and most stable wireless connection in hospital environments.

Solution


Optional

Peripherals

IEIMobile Solutions

Automation Panel Solutions

- PCIe interface high speed WLAN
  IEEE 802.11a/b/g/n
- Dual-band 2.4GHz/5GHz
- 3 antenna, 3 transmitters, 3 receivers
- 20MHz / 40 MHz bandwith
- Max. 450 Mbps link rate for 40MHz channel

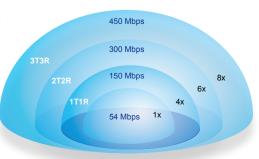


## Innovative LED Dash Light System for Patient Room Visual Management

PACSmate IBS-19A series is the industry-first all-in-one medical computer integrated with high-brightness true color LED Dash Light System which provides maximum flexibility and unlimited possibilities for visual notification in patient bedside, patient room facility and nursing stations The exclusive LED Dash Light System consists of three LED light bars with a total of 33 light sections which provides ultimate possibilities for configuration of different visual notifications for all kinds of occasions in the healthcare environment.

The innovative LED Dash Light System can replace the traditional LED dome light for more flexibility as well as saving costs and maintenance efforts.

- · High-brightness easy-to-see LED dash lights
- 24-bit true color LED provides a total of 1.67 million colors (256 preset colors )
- · 33 light sections, each light section can be configured independently.
- 100% software programmable colors, light duration, flash rates and light patterns
- Provide PACSmate LED Dash Light System simulation software for quick and easy configuration and preview of the light script.
- Provide software API for software vendors with easy integration of all control commands to any specific healthcare application software. Software vendors are free to take the advantage of the PACSmate LED Dash Light System, creating additional values for the healthcare applications.

# PACSmate LED Dash Light System Simulation Software

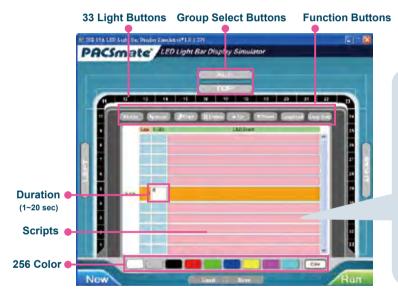




www.icp-deutschland.de

# Flexible and Easy Installation

ICP Deutschland GmbH

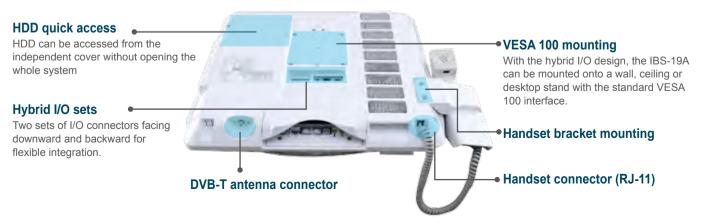

sales@icp-deutschland.de


+49(0)7121-14323-20




1 IEI Mobile Solutions



Optional Peripheral:

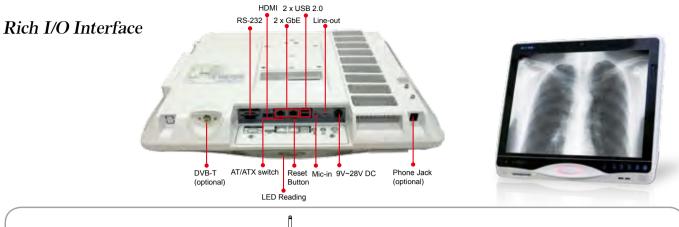

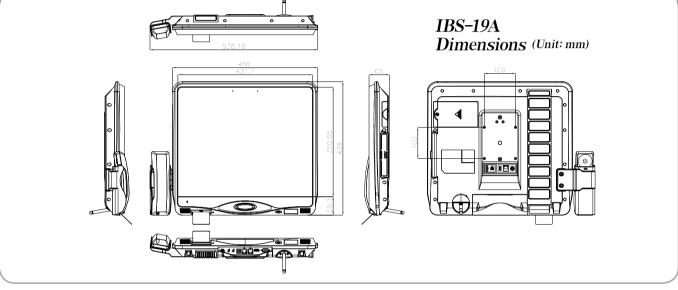

## **Ordering Information**

19	
IBS-19A3L-P/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/ g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-1943D-P/26/326-R10	19" Medical Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/ g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-P/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/ g/n, Touchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.
IBS-19A3L-i3/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Fouchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-19A3D-13/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Fouchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-i3/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, fouchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.
IBS-19A3L-15/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-1943D-15/2G/32G-R10	I9" Medical Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-I5/2G/32G-R10	19" Medical Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.

### **Options**

Item	Part No.	Item	Part No.
Handset	IBSOPT-HS-R10	Smart Card Reader	IBSOPT-SCR-R10
Mifare RFID Reader	IBSOPT-RFID-R10	Arm	ARM-31-RS
Wall Mounting Kit	AFLWK-19B	Stand	STAND-300SW-RS/STAND-A19/STAND-A21-R10/STAND-C19

## Packing List

Item	Part No.	Q'ty	Description
Utility CD	7B000-000773-RS	1	Drivers and User Manual
Power Adapter	63040-010120-010-RS	1	PMP120-13-2, 90~264VAC Input, 120W, 19VDC output
Power Cord	32702-000200-100-RS	1	European, 1830mm
Pen	43125-0002C0-00-RS	1	For Resistive Touch
Mounting Bracket	41120-0310C0-00-RS	1	Mount Bracket
Infrared Remote Controller	7Z000-SLPCB005-RS	1	

3 PACSmat Medics Solution

Optional Peripherals