




Redundant Type Selection Guide

AC Input


Product	Model No.	Watt ATX/PFC	Input Range Voltage	Output Current Range							Efficiency	Operating Temperature	Safety	Dimensions (mm)
				+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb	24V				
	ACE-R4140AP	400W ATX PFC	90 ~ 264 VAC	25 A (2A min)	25 A (2 A min)	30 A (2.5 A min)		0.8 A (0.1A min)	2 A (0.1A min)		65%	0°C ~ 40°C	UL, TUV, CCC, BSMI, CE, FCC	150 x 85 x 190
	ACE-R4130AP	300W ATX PFC	90 ~ 264 VAC	18 A (1A min)	25 A (3 A min)	16 A (2 A min)	0.5A	0.5 A	2 A (0.1A min)		65%	0°C ~ 50°C	CB, UL, TUV, CCC, CE, FCC	185 x 150 x 86
	DRP-R150C	150W	90~264 VAC							6.25A	87%	-10°C~ 70°C	CE, CB, CCC	210 x 85.6 x 133.5

ACE-R4140AP

400 W ATX Mini Redundant Power Supply



Dimensions (Unit: mm)

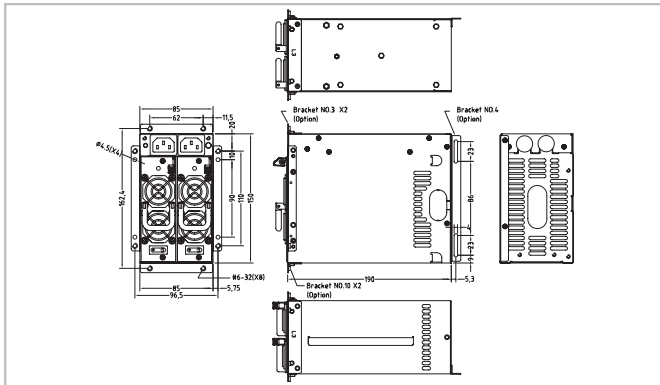


ACE-R4130AP

300 W ATX Mini Redundant Power Supply



Dimensions (Unit: mm)

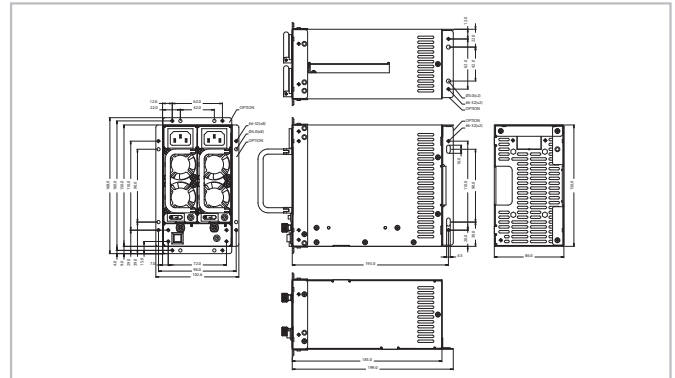

Specifications

Input	Voltage	90 ~ 264 VAC Full Range		
	Frequency	47 Hz ~ 63 Hz		
	Input Current	8 A (RMS) @ 100 VAC, 4 A (RMS) @ 240 VAC		
	Inrush Current	80 A Max for 100 VAC, 120 A Max for 240 VAC		
Output	Voltage	Min. load	Max. load	Ripple & Noise
	+5 V	2 A	25 A	50 mV P-P
	+12 V	2.5 A	30 A	120 mV P-P
	-12 V	0.1 A	0.8 A	120 mV P-P
	+3.3 V	2 A	25 A	50 mV P-P
	+5 Vsb	0.1 A	2 A	50 mV P-P
	+5 V, +12 V total current not exceed 150 W +3.3 V, +5 V, +12V total current not exceed 440 W			
General Specification	Hold up Time	17 ms Min.		
	Efficiency	65% Min.		
	MTBF	100,000 hours on max load at +25°C		
	Temperature	Operating: 0°C ~ 50°C, Storage: -40°C ~ 70°C		
	Dimensions	150 x 85 x 190 (mm) 1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power		

Ordering Information

Part No.	Description
ACE-R4140AP-RS	400W Mini Redundant ATX Power Supply, with PFC
ACE-R4140AP1-RS	400W AC-DC ATX Redundant module, for ACE-R4140AP, with PFC

Specifications

Input	Voltage	90 ~ 264 VAC Full Range		
	Frequency	47 Hz ~ 63 Hz		
	Input Current	6 A (RMS) @ 110 VAC, 3 A (RMS) @ 220 VAC		
	Inrush Current	60 A Max for 110 VAC, 80 A Max for 220 VAC		
Output	Voltage	Min. load	Max. load	Ripple & Noise
	+5 V	3 A	25 A	50mV P-P
	+12 V	2 A	16 A	120mV P-P
	-5 V	0 A	0.5 A	150mV P-P
	-12 V	0 A	0.5 A	150mV P-P
	+3.3 V	1 A	18 A	50mV P-P
	+5 Vsb	0.1 A	2 A	60mV P-P
*Total current of +5 V and + 3.3 V not exceed 35 A *Total current of +5 V, +3.3 V and +12 V not exceed 282 W				
General Specifications	Watt	300 W		
	Hold-up Time	16 ms Min.		
	Efficiency	65% Min.		
	MTBF	160,000 hours		
	Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C		
	Dimensions	185 x 150 x 86 (mm), 7.28 x 5.91 x 3.39 (inch) 1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power		
	Output Connector			

Ordering Information

Part No.	Description
ACE-R4130AP-RS	300 W Mini Redundant ATX Power Supply, with PFC
ACE-R4130AP1-RS	300 W AC-DC ATX Redundant module, for ACE-R4130AP, with PFC

- 1 Industrial Computing Solutions
- 2 Video Capture Solutions
- 3 Embedded Computing Solutions
- 4 Automation Control
- 5 ORing Network Communication
- 6 Power Supply/Peripherals
- 7 Panel Solutions Introduction