


成品图

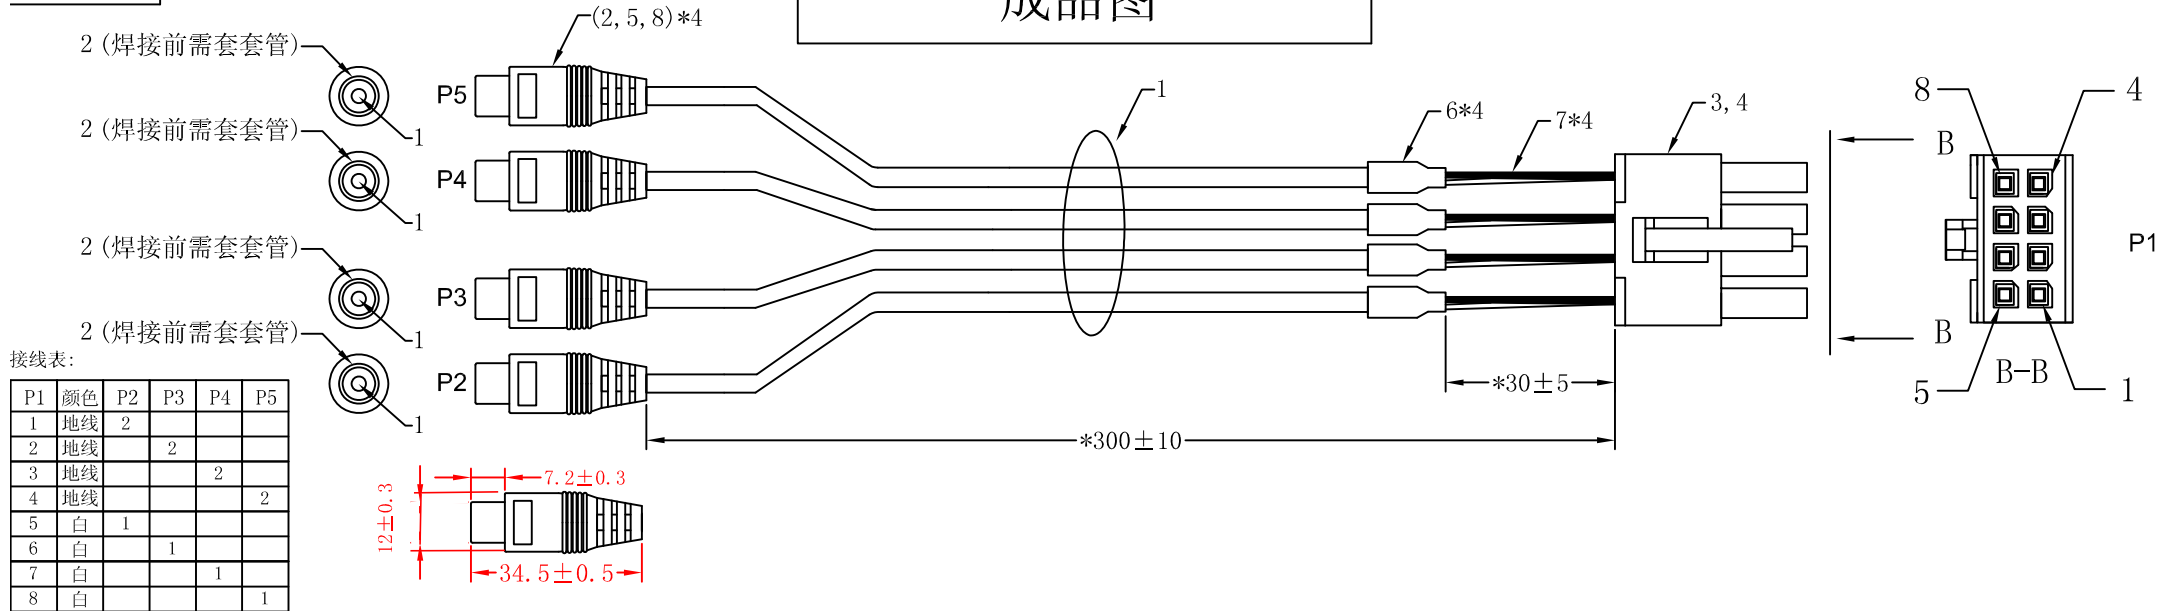

接线表:

P1	颜色	P2	P3	P4	P5
1	地线	2			
2	地线		2		
3	地线			2	
4	地线				2
5	白	1			
6	白		1		
7	白			1	
8	白				1

Bill Of Materials						
NO.	零件编码	品名	DESCRIPTION	Q' TY	supplier name	REMARK
1	WH185001	CABLE	UL1185#26*1C+S 内芯:白 外被:黑 OD=2.3	4PCS	新亚	2mm焊接, 3.4mm打端
			L=335*(12*2)*(40*3.4)mm			
2	RCA00009	RCA	RCA JACK 母头 黄铜镀镍 白	4PCS	皇积	
3	CT070106	TERMINAL	鸿儒:T3025PS-2B 镀锡	8PCS		
4	CH070817	HOUSING	鸿儒:P3025-2*4P-B-H 双排 黑	1PCS		
5	PA015110	H. S TUBE	□1.5 黑(超薄) L=8mm	4PCS		
6	PA003110	H. S TUBE	□3.0 黑(超薄) L=15mm	4PCS		
7	PA001110	H. S TUBE	□1.0 黑(超薄) L=36mm	4PCS		
8	PVC00123	PVC	45P 黄	40g		
9	BC000007	PE BAG	L420*W350*0.04mm	A/RPCS		
9	BD000004	纸箱	L330*W280*H250mm	A/RPCS		

注: 1. 环境要求: 需符合裕《有害物质管制程序》.

2. 图上带"*"符为重点控制尺寸.

3. 测试条件: 电压300V, 绝缘阻抗20MΩ, 导通阻抗3Ω, 测试时间0.01S.

REV	DESCRIPTION	DATE
REVISIONS		

X.±1.0	X'.±	APPROVED:	CUSTOMER: W D		
.X±0.2	.X'±		DESCRIPTION: WIRE ASS'Y		
.XX±0.1	.XX'±	CHECKED:	P/N: 32010-001700-100-RS		
.XXX±	.XXX'±		Y. Y. P/N: WD-3065		
		ENGINEER:	REV	UNIT	客户版本:
		DRAWING: 崔伟 2015-01-22	1	m/m	DATE: 2015-01-22



SHANGHAI YINGYU
ELECTRONIC CO.,LTD